

**6.003: Signals and Systems**

**CT Feedback and Control**

October 25, 2011

**Mid-term Examination #2**

Tomorrow, October 26, 7:30-9:30pm, Walker (50-340)

No recitations on the day of the exam.

Coverage: Lectures 1–12  
 Recitations 1–12  
 Homeworks 1–7

Homework 7 will not be collected or graded. Solutions are posted.

Closed book: 2 pages of notes (8½ × 11 inches; front and back).

No calculators, computers, cell phones, music players, or other aids.

Designed as 1-hour exam; two hours to complete.

Old exams and solutions are posted on the 6.003 website.

**Feedback and Control**

Using feedback to enhance performance.


Examples:

- improve performance of an op amp circuit.
- control position of a motor.
- reduce sensitivity to unwanted parameter variation.
- reduce distortions.
- stabilize unstable systems
  - magnetic levitation
  - inverted pendulum

**Feedback and Control**

Reducing sensitivity to unwanted parameter variation.


Example: power amplifier

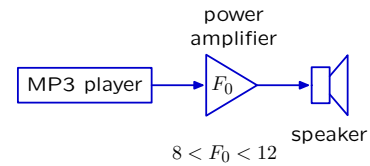

Changes in  $F_0$  (due to changes in temperature, for example) lead to undesired changes in sound level.

**Feedback and Control**

Feedback can be used to compensate for parameter variation.

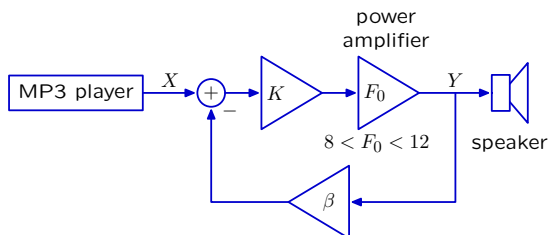

$$H(s) = \frac{KF_0}{1 + \beta KF_0}$$


If  $K$  is made large, so that  $\beta KF_0 \gg 1$ , then

$$H(s) \approx \frac{1}{\beta}$$


independent of  $K$  or  $F_0$ !

**Feedback and Control**

Feedback reduces the change in gain due to change in  $F_0$ .

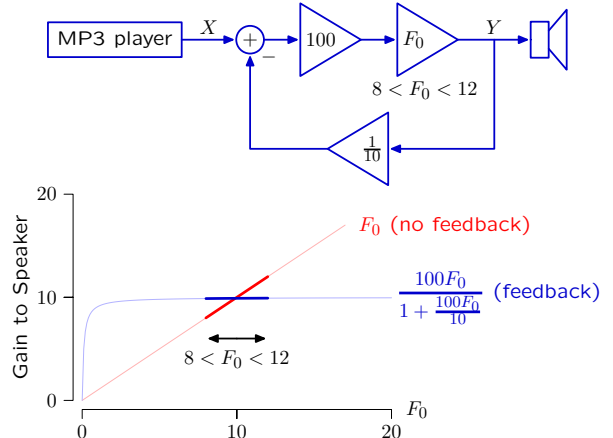

**Check Yourself**

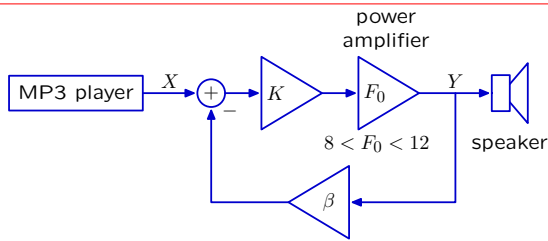

Feedback greatly reduces sensitivity to variations in  $K$  or  $F_0$ .


$$\lim_{K \rightarrow \infty} H(s) = \frac{KF_0}{1 + \beta KF_0} \rightarrow \frac{1}{\beta}$$

What about variations in  $\beta$ ? Aren't those important?

**Crossover Distortion**

Feedback can compensate for parameter variation even when the variation occurs rapidly.

Example: using transistors to amplify power.

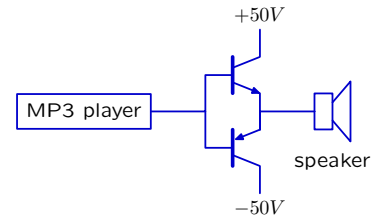


**Crossover Distortion**

This circuit introduces "crossover distortion."

For the upper transistor to conduct,  $V_i - V_o > V_T$ .


For the lower transistor to conduct,  $V_i - V_o < -V_T$ .

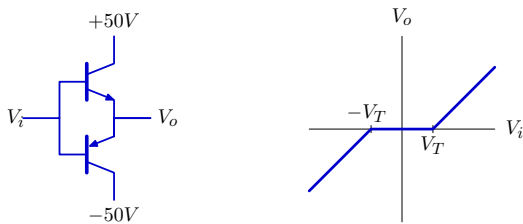

**Crossover Distortion**


Crossover distortion changes the shapes of signals.

Example: crossover distortion when the input is  $V_i(t) = B \sin(\omega_0 t)$ .

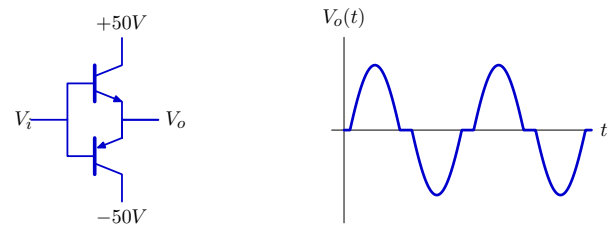

**Crossover Distortion**


Feedback reduces crossover distortion.

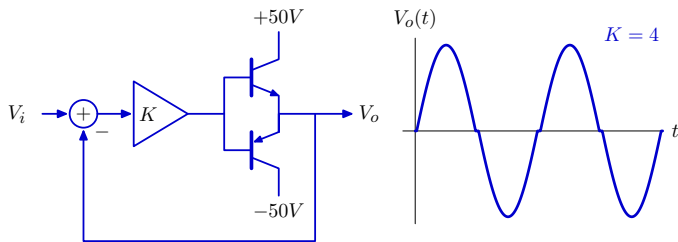

**Crossover Distortion**

Demo

- original
- no feedback
- $K = 2$
- $K = 4$
- $K = 8$
- $K = 16$
- original

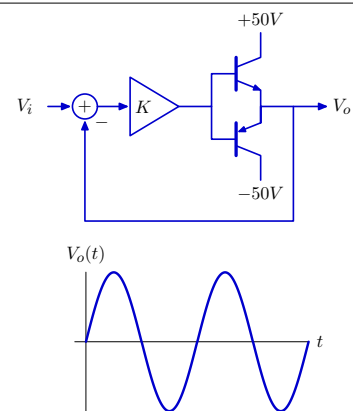

J.S. Bach, Sonata No. 1 in G minor Mvmt. IV. Presto  
Nathan Milstein, violin

**Feedback and Control**


Using feedback to enhance performance.

Examples:

- improve performance of an op amp circuit.
- control position of a motor.
- reduce sensitivity to unwanted parameter variation.
- reduce distortions.
- stabilize unstable systems
  - magnetic levitation
  - inverted pendulum

**Control of Unstable Systems**


Magnetic levitation is unstable.

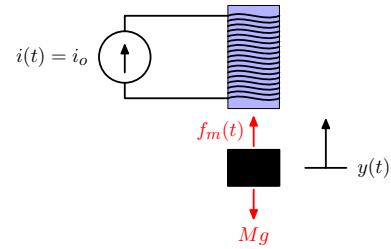

Equilibrium ( $y = 0$ ): magnetic force  $f_m(t)$  is equal to the weight  $Mg$ .  
 Increase  $y \rightarrow$  increased force  $\rightarrow$  further increases  $y$ .  
 Decrease  $y \rightarrow$  decreased force  $\rightarrow$  further decreases  $y$ .  
 Positive feedback!


**Modeling Magnetic Levitation**

The magnet generates a force that depends on the distance  $y(t)$ .

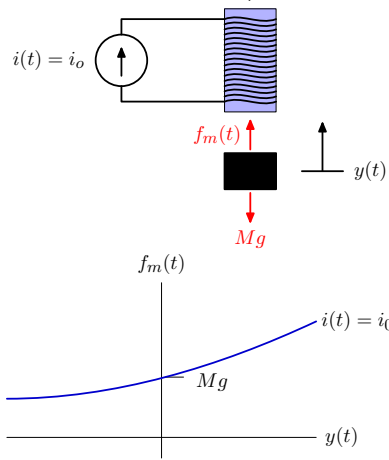


**Modeling Magnetic Levitation**

The net force  $f(t) = f_m(t) - Mg$  accelerates the mass.

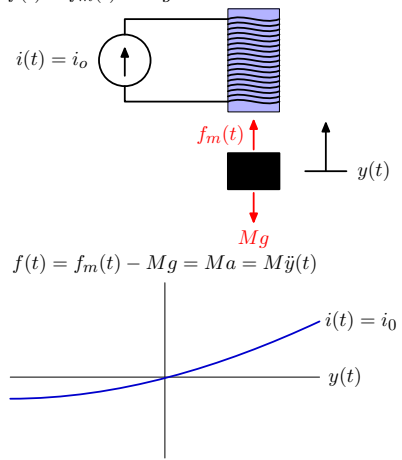


**Modeling Magnetic Levitation**

Represent the magnet as a system: input  $y(t)$  and output  $f(t)$ .

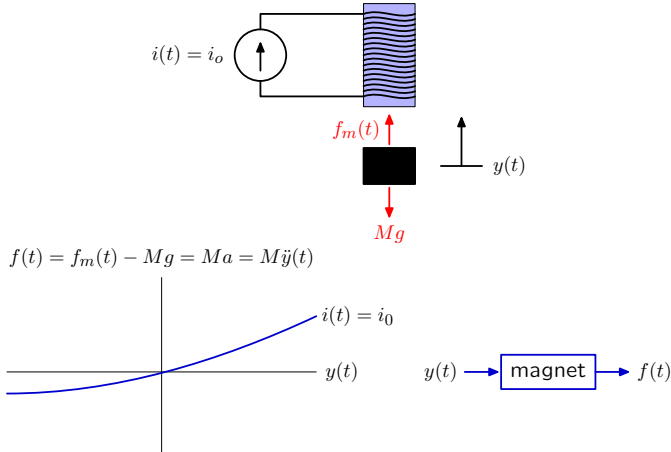

**Modeling Magnetic Levitation**


The magnet system is part of a feedback system.

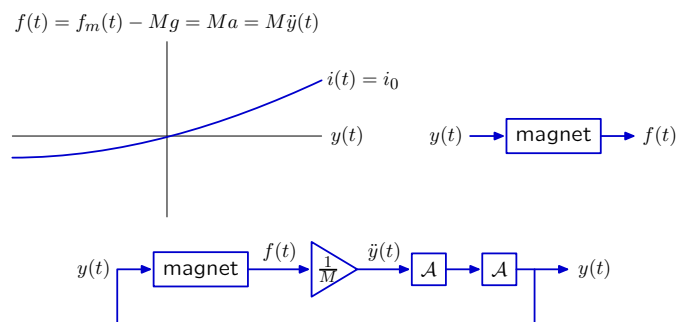

**Modeling Magnetic Levitation**

For small distances, force grows approximately linearly with distance.


$$f(t) = f_m(t) - Mg = Ma = M\ddot{y}(t)$$

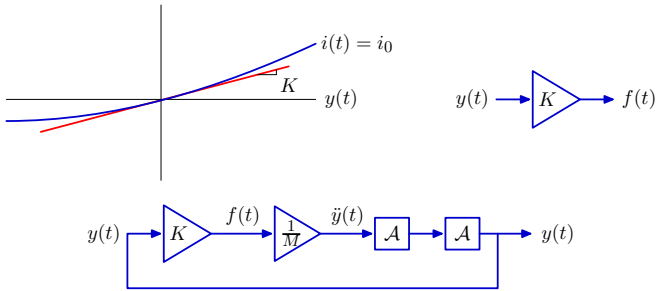

**"Levitation" with a Spring**

Relation between force and distance for a spring is opposite in sign.

$$F = K(x(t) - y(t)) = M\ddot{y}(t)$$

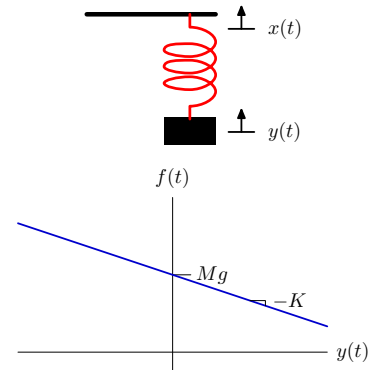


**Check Yourself**

How do the poles of these two systems differ?


Spring and mass

$$F = K(x(t) - y(t)) = M\ddot{y}(t)$$




Magnetic levitation

$$F = Ky(t) = M\ddot{y}(t)$$




**Magnetic Levitation is Unstable**

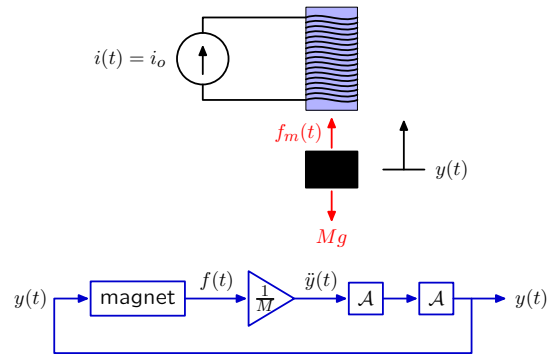


**Magnetic Levitation**

We can stabilize this system by adding an additional feedback loop to control  $i(t)$ .

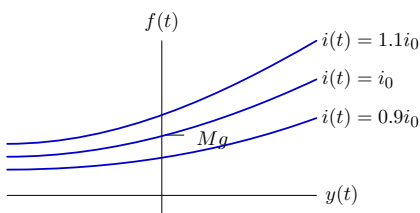


**Stabilizing Magnetic Levitation**

Stabilize magnetic levitation by controlling the magnet current.

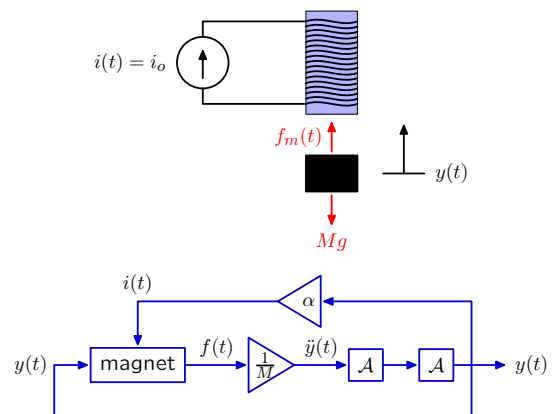


**Stabilizing Magnetic Levitation**

Stabilize magnetic levitation by controlling the magnet current.

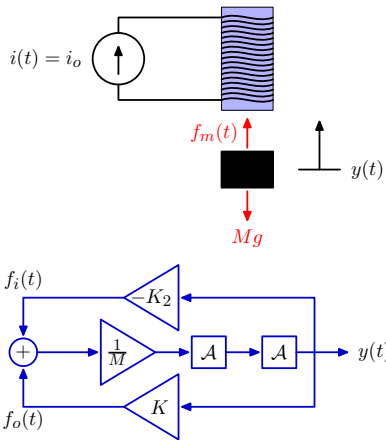

**Magnetic Levitation**


Increasing  $K_2$  moves poles toward the origin and then onto  $j\omega$  axis.

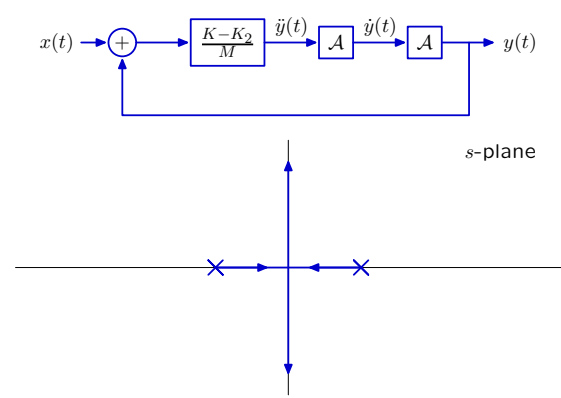

But the poles are still marginally stable.

**Magnetic Levitation**


Adding a zero makes the poles stable for sufficiently large  $K_2$ .

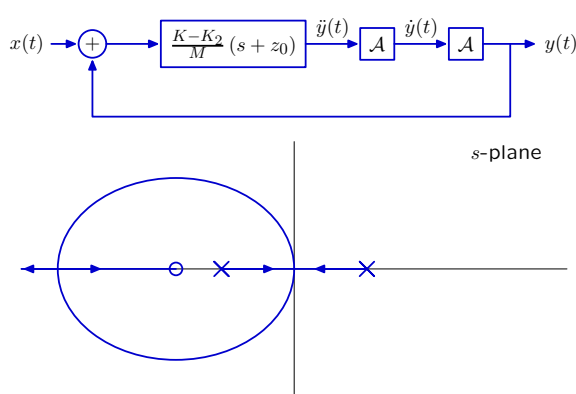

Try it: Demo [designed by Prof. James Roberge].

**Inverted Pendulum**


As a final example of stabilizing an unstable system, consider an inverted pendulum.

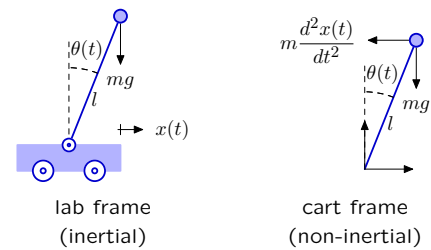

$$ml^2 \frac{d^2\theta(t)}{dt^2} = \underbrace{mg}_{\text{force}} \underbrace{l \sin \theta(t)}_{\text{distance}} - \underbrace{m \frac{d^2x(t)}{dt^2}}_{\text{force}} \underbrace{l \cos \theta(t)}_{\text{distance}}$$

**Check Yourself: Inverted Pendulum**


Where are the poles of this system?

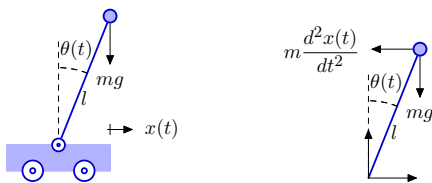

$$ml^2 \frac{d^2\theta(t)}{dt^2} = mgl \sin \theta(t) - m \frac{d^2x(t)}{dt^2} l \cos \theta(t)$$

**Inverted Pendulum**

This unstable system can be stabilized with feedback.

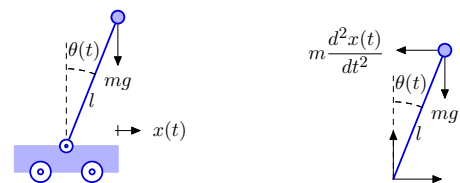

Try it. Demo. [originally designed by Marcel Gaudreau]

### Feedback and Control

---

Using feedback to enhance performance.

Examples:

- improve performance of an op amp circuit.
- control position of a motor.
- reduce sensitivity to unwanted parameter variation.
- reduce distortions.
- stabilize unstable systems
  - magnetic levitation
  - inverted pendulum