

# 6.003: Signals and Systems

## DT Fourier Representations

*November 10, 2011*

## Mid-term Examination #3

---

Wednesday, November 16, 7:30-9:30pm, Walker (50-340)

No recitations on the day of the exam.

Coverage:     Lectures 1-18  
                  Recitations 1-16  
                  Homeworks 1-10

Homework 10 will not be collected or graded.

Solutions will be posted.

Closed book: 3 pages of notes ( $8\frac{1}{2} \times 11$  inches; front and back).

No calculators, computers, cell phones, music players, or other aids.

Designed as 1-hour exam; two hours to complete.

Review session Monday at 3pm (36-112) and at open office hours.


Prior term midterm exams have been posted on the 6.003 website.

Conflict? Contact [freeman@mit.edu](mailto:freeman@mit.edu) before Friday, Nov. 11, 5pm.

## Review: DT Frequency Response

---

The frequency response of a DT LTI system is the value of the system function evaluated on the unit circle.





$$H(e^{j\Omega}) = H(z)|_{z=e^{j\Omega}}$$

## Comparison of CT and DT Frequency Responses


CT frequency response:  $H(s)$  on the imaginary axis, i.e.,  $s = j\omega$ .

DT frequency response:  $H(z)$  on the unit circle, i.e.,  $z = e^{j\Omega}$ .

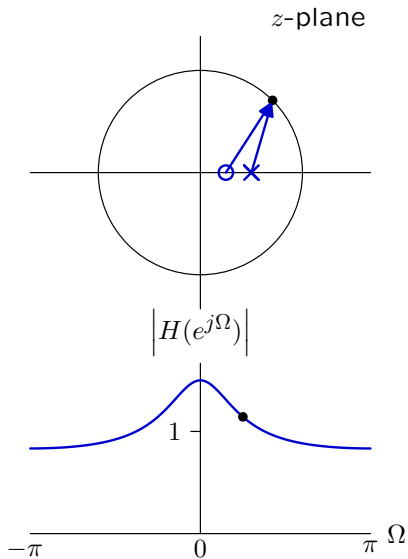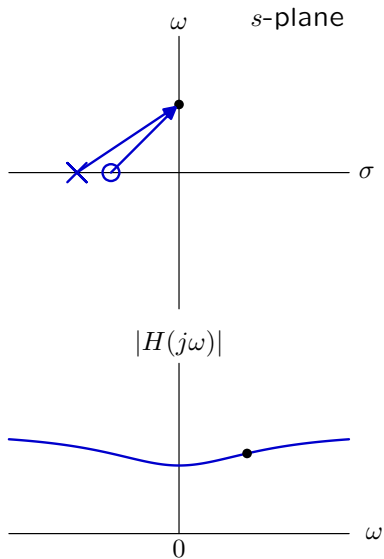

## Check Yourself

A system  $H(z) = \frac{1 - az}{z - a}$  has the following pole-zero diagram.

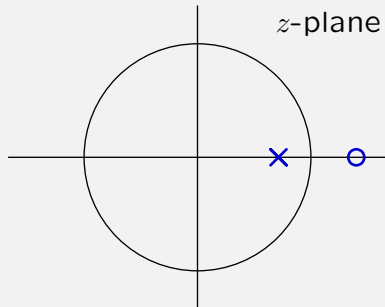


Classify this system as one of the following filter types.

- |              |                      |
|--------------|----------------------|
| 1. high pass | 2. low pass          |
| 3. band pass | 4. all pass          |
| 5. band stop | 0. none of the above |



## Check Yourself

A system  $H(z) = \frac{1 - az}{z - a}$  has the following pole-zero diagram.


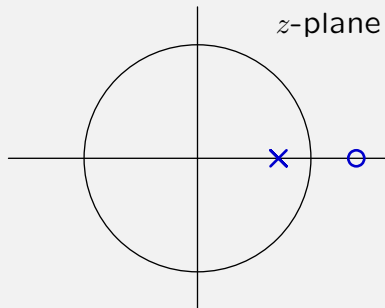


Classify this system as one of the following filter types. 4

1. high pass
2. low pass
3. band pass
4. all pass
5. band stop
0. none of the above

## Effects of Phase




$$x[n] \rightarrow \boxed{H(z) = \frac{1 - az}{z - a}} \rightarrow y[n]$$

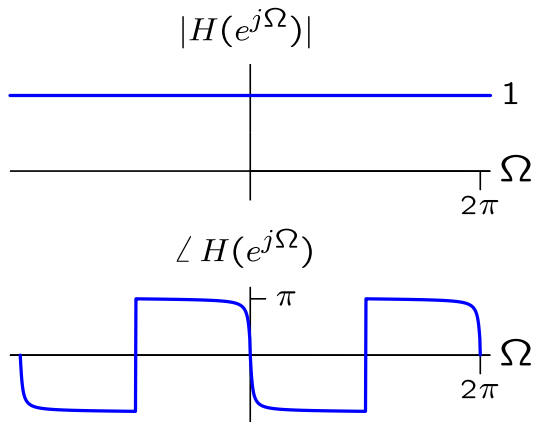



## Effects of Phase



---

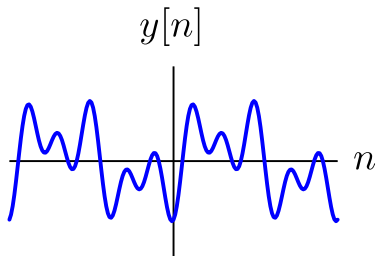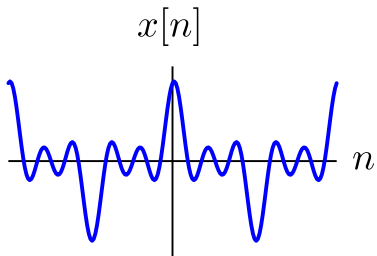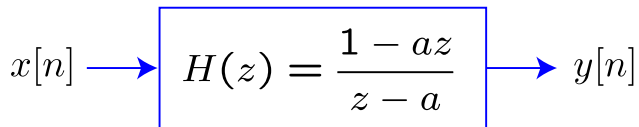

## Effects of Phase

---

$$x[n] \longrightarrow \boxed{H(z) = \frac{1 - az}{z - a}} \longrightarrow y[n]$$

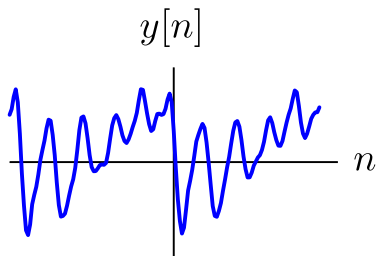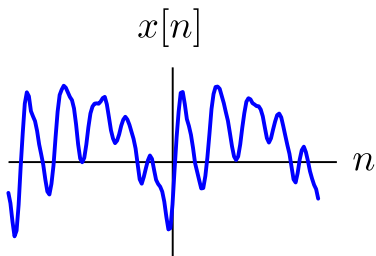


## Effects of Phase


---

$$x[n] \longrightarrow \boxed{H(z) = \frac{1 - az}{z - a}} \longrightarrow y[n]$$

$x[n]$

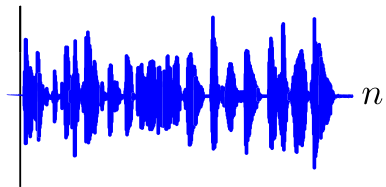

$y[n]$


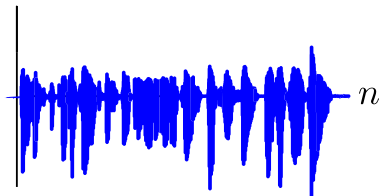


artificial speech synthesized by Robert Donovan

# Effects of Phase

---

$$x[n] \longrightarrow \boxed{???} \longrightarrow y[n] = x[-n]$$

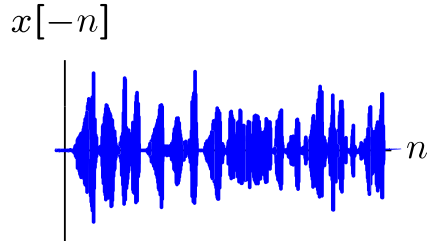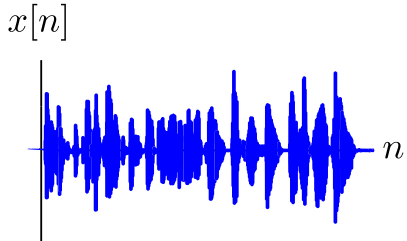


artificial speech synthesized by Robert Donovan

## Effects of Phase


---

$$x[n] \longrightarrow \boxed{???} \longrightarrow y[n] = x[-n]$$

$x[n]$

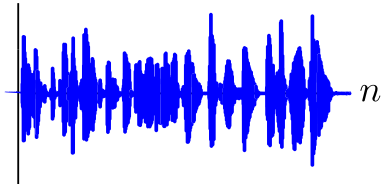

$x[-n]$

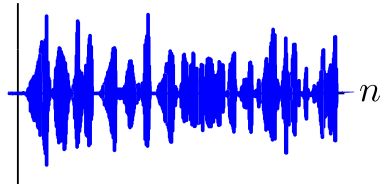


How are the phases of  $X$  and  $Y$  related?


## Effects of Phase

---

$x[n]$

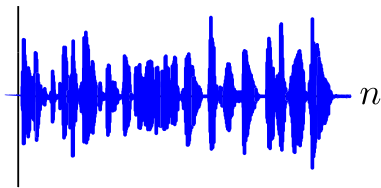

$x[-n]$

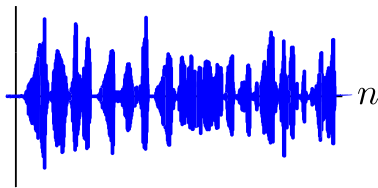

How are the phases of  $X$  and  $Y$  related?

$$a_k = \sum_n x[n] e^{-jk\Omega_0 n}$$

$$b_k = \sum_n x[-n] e^{-jk\Omega_0 n} = \sum_m x[m] e^{jk\Omega_0 m} = a_{-k}$$

Flipping  $x[n]$  about  $n = 0$  flips  $a_k$  about  $k = 0$ .

Because  $x[n]$  is real-valued,  $a_k$  is conjugate symmetric:  $a_{-k} = a_k^*$ .

$$b_k = a_{-k} = a_k^* = |a_k| e^{-j\angle a_k}$$

The angles are negated at all frequencies.

## Review: Periodicity

---

DT frequency responses are periodic functions of  $\Omega$ , with period  $2\pi$ .

If  $\Omega_2 = \Omega_1 + 2\pi k$  where  $k$  is an integer then

$$H(e^{j\Omega_2}) = H(e^{j(\Omega_1+2\pi k)}) = H(e^{j\Omega_1}e^{j2\pi k}) = H(e^{j\Omega_1})$$

The periodicity of  $H(e^{j\Omega})$  results because  $H(e^{j\Omega})$  is a function of  $e^{j\Omega}$ , which is itself periodic in  $\Omega$ . Thus DT complex exponentials have many “aliases.”

$$e^{j\Omega_2} = e^{j(\Omega_1+2\pi k)} = e^{j\Omega_1}e^{j2\pi k} = e^{j\Omega_1}$$

Because of this aliasing, there is a “highest” DT frequency:  $\Omega = \pi$ .

## Review: Periodic Sinusoids

---

There are (only)  $N$  distinct complex exponentials with period  $N$ .


(There were an infinite number in CT!)

If  $y[n] = e^{j\Omega n}$  is periodic in  $N$  then

$$y[n] = e^{j\Omega n} = y[n + N] = e^{j\Omega(n+N)} = e^{j\Omega n} e^{j\Omega N}$$

and  $e^{j\Omega N}$  must be 1, and  $e^{j\Omega}$  must be one of the  $N^{\text{th}}$  roots of 1.

Example:  $N = 8$





## Review: DT Fourier Series

---

DT Fourier series represent DT signals in terms of the amplitudes and phases of harmonic components.

### DT Fourier Series

$$a_k = a_{k+N} = \frac{1}{N} \sum_{n=\langle N \rangle} x[n] e^{-jk\Omega_0 n} \quad ; \quad \Omega_0 = \frac{2\pi}{N} \quad (\text{"analysis" equation})$$

$$x[n] = x[n+N] = \sum_{k=\langle N \rangle} a_k e^{jk\Omega_0 n} \quad (\text{"synthesis" equation})$$

## DT Fourier Series

---

DT Fourier series have simple matrix interpretations.

$$x[n] = x[n + 4] = \sum_{k=\langle 4 \rangle} a_k e^{jk\Omega_0 n} = \sum_{k=\langle 4 \rangle} a_k e^{jk\frac{2\pi}{4}n} = \sum_{k=\langle 4 \rangle} a_k j^{kn}$$

$$\begin{bmatrix} x[0] \\ x[1] \\ x[2] \\ x[3] \end{bmatrix} = \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & j & -1 & -j \\ 1 & -1 & 1 & -1 \\ 1 & -j & -1 & j \end{bmatrix} \begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix}$$

$$a_k = a_{k+4} = \frac{1}{4} \sum_{n=\langle 4 \rangle} x[n] e^{-jk\Omega_0 n} = \frac{1}{4} \sum_{n=\langle 4 \rangle} e^{-jk\frac{2\pi}{N}n} = \frac{1}{4} \sum_{n=\langle 4 \rangle} x[n] j^{-kn}$$

$$\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \frac{1}{4} \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & -j & -1 & j \\ 1 & -1 & 1 & -1 \\ 1 & j & -1 & -j \end{bmatrix} \begin{bmatrix} x[0] \\ x[1] \\ x[2] \\ x[3] \end{bmatrix}$$

These matrices are inverses of each other.

## Scaling

---

DT Fourier series are important computational tools.

However, the DT Fourier series do not scale well with the length  $N$ .

$$a_k = a_{k+2} = \frac{1}{2} \sum_{n=\langle 2 \rangle} x[n] e^{-jk\Omega_0 n} = \frac{1}{2} \sum_{n=\langle 2 \rangle} e^{-jk\frac{2\pi}{2}n} = \frac{1}{2} \sum_{n=\langle 2 \rangle} x[n] (-1)^{-kn}$$

$$\begin{bmatrix} a_0 \\ a_1 \end{bmatrix} = \frac{1}{2} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[1] \end{bmatrix}$$

$$a_k = a_{k+4} = \frac{1}{4} \sum_{n=\langle 4 \rangle} x[n] e^{-jk\Omega_0 n} = \frac{1}{4} \sum_{n=\langle 4 \rangle} e^{-jk\frac{2\pi}{4}n} = \frac{1}{4} \sum_{n=\langle 4 \rangle} x[n] j^{-kn}$$

$$\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \frac{1}{4} \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & -j & -1 & j \\ 1 & -1 & 1 & -1 \\ 1 & j & -1 & -j \end{bmatrix} \begin{bmatrix} x[0] \\ x[1] \\ x[2] \\ x[3] \end{bmatrix}$$

Number of multiples increases as  $N^2$ .

## Fast Fourier “Transform”

---

Exploit structure of Fourier series to simplify its calculation.

Divide FS of length  $2N$  into two of length  $N$  (divide and conquer).

Matrix formulation of 8-point FS:

$$\begin{bmatrix} c_0 \\ c_1 \\ c_2 \\ c_3 \\ c_4 \\ c_5 \\ c_6 \\ c_7 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^1 & W_8^2 & W_8^3 & W_8^4 & W_8^5 & W_8^6 & W_8^7 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 & W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^3 & W_8^6 & W_8^1 & W_8^4 & W_8^7 & W_8^2 & W_8^5 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 & W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^5 & W_8^2 & W_8^7 & W_8^4 & W_8^1 & W_8^6 & W_8^3 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 & W_8^0 & W_8^6 & W_8^4 & W_8^2 \\ W_8^0 & W_8^7 & W_8^6 & W_8^5 & W_8^4 & W_8^3 & W_8^2 & W_8^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[1] \\ x[2] \\ x[3] \\ x[4] \\ x[5] \\ x[6] \\ x[7] \end{bmatrix}$$

where  $W_N = e^{-j\frac{2\pi}{N}}$

$8 \times 8 = 64$  multiplications

# FFT

---

Divide into two 4-point series (divide and conquer).

Even-numbered entries in  $x[n]$ :

$$\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

Odd-numbered entries in  $x[n]$ :

$$\begin{bmatrix} b_0 \\ b_1 \\ b_2 \\ b_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

Sum of multiplications =  $2 \times (4 \times 4) = 32$ : fewer than the previous 64.

## FFT

---

Break the original 8-point DTFS coefficients  $c_k$  into two parts:

$$c_k = d_k + e_k$$

where  $d_k$  comes from the even-numbered  $x[n]$  (e.g.,  $a_k$ ) and  $e_k$  comes from the odd-numbered  $x[n]$  (e.g.,  $b_k$ )

# FFT

---

The 4-point DTFS coefficients  $a_k$  of the even-numbered  $x[n]$

$$\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

contribute to the 8-point DTFS coefficients  $d_k$ :

$$\begin{bmatrix} d_0 \\ d_1 \\ d_2 \\ d_3 \\ d_4 \\ d_5 \\ d_6 \\ d_7 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^1 & W_8^2 & W_8^3 & W_8^4 & W_8^5 & W_8^6 & W_8^7 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 & W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^3 & W_8^6 & W_8^1 & W_8^4 & W_8^7 & W_8^2 & W_8^5 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 & W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^5 & W_8^2 & W_8^7 & W_8^4 & W_8^1 & W_8^6 & W_8^3 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 & W_8^0 & W_8^6 & W_8^4 & W_8^2 \\ W_8^0 & W_8^7 & W_8^6 & W_8^5 & W_8^4 & W_8^3 & W_8^2 & W_8^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[1] \\ x[2] \\ x[3] \\ x[4] \\ x[5] \\ x[6] \\ x[7] \end{bmatrix}$$

# FFT

---

The 4-point DTFS coefficients  $a_k$  of the even-numbered  $x[n]$

$$\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

contribute to the 8-point DTFS coefficients  $d_k$ :

$$\begin{bmatrix} d_0 \\ d_1 \\ d_2 \\ d_3 \\ d_4 \\ d_5 \\ d_6 \\ d_7 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \\ W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$



# FFT

---

The 4-point DTFS coefficients  $a_k$  of the even-numbered  $x[n]$

$$\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

contribute to the 8-point DTFS coefficients  $d_k$ :

$$\begin{bmatrix} d_0 \\ d_1 \\ d_2 \\ d_3 \\ d_4 \\ d_5 \\ d_6 \\ d_7 \end{bmatrix} = \begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \\ a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \\ W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

# FFT

The 4-point DTFS coefficients  $a_k$  of the even-numbered  $x[n]$

$$\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

contribute to the 8-point DTFS coefficients  $d_k$ :

$$\begin{bmatrix} d_0 \\ d_1 \\ d_2 \\ d_3 \\ d_4 \\ d_5 \\ d_6 \\ d_7 \end{bmatrix} = \begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \\ a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \\ W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[0] \\ x[2] \\ x[4] \\ x[6] \end{bmatrix}$$

# FFT

---

The  $e_k$  components result from the odd-number entries in  $x[n]$ .

$$\begin{bmatrix} b_0 \\ b_1 \\ b_2 \\ b_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

$$\begin{bmatrix} e_0 \\ e_1 \\ e_2 \\ e_3 \\ e_4 \\ e_5 \\ e_6 \\ e_7 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^1 & W_8^2 & W_8^3 & W_8^4 & W_8^5 & W_8^6 & W_8^7 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 & W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^3 & W_8^6 & W_8^1 & W_8^4 & W_8^7 & W_8^2 & W_8^5 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 & W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^5 & W_8^2 & W_8^7 & W_8^4 & W_8^1 & W_8^6 & W_8^3 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 & W_8^0 & W_8^6 & W_8^4 & W_8^2 \\ W_8^0 & W_8^7 & W_8^6 & W_8^5 & W_8^4 & W_8^3 & W_8^2 & W_8^1 \end{bmatrix} \begin{bmatrix} x[0] \\ x[1] \\ x[2] \\ x[3] \\ x[4] \\ x[5] \\ x[6] \\ x[7] \end{bmatrix}$$

The  $e_k$  components result from the odd-number entries in  $x[n]$ .

$$\begin{bmatrix} b_0 \\ b_1 \\ b_2 \\ b_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

$$\begin{bmatrix} e_0 \\ e_1 \\ e_2 \\ e_3 \\ e_4 \\ e_5 \\ e_6 \\ e_7 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^1 & W_8^3 & W_8^5 & W_8^7 \\ W_8^2 & W_8^6 & W_8^2 & W_8^8 \\ W_8^3 & W_8^1 & W_8^7 & W_8^5 \\ W_8^4 & W_8^4 & W_8^4 & W_8^4 \\ W_8^5 & W_8^7 & W_8^1 & W_8^3 \\ W_8^6 & W_8^2 & W_8^6 & W_8^2 \\ W_8^7 & W_8^5 & W_8^3 & W_8^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

# FFT

---

The  $e_k$  components result from the odd-number entries in  $x[n]$ .

$$\begin{bmatrix} b_0 \\ b_1 \\ b_2 \\ b_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

$$\begin{bmatrix} e_0 \\ e_1 \\ e_2 \\ e_3 \\ e_4 \\ e_5 \\ e_6 \\ e_7 \end{bmatrix} = \begin{bmatrix} W_8^0 b_0 \\ W_8^1 b_1 \\ W_8^2 b_2 \\ W_8^3 b_3 \\ W_8^4 b_0 \\ W_8^5 b_1 \\ W_8^6 b_2 \\ W_8^7 b_3 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^1 & W_8^3 & W_8^5 & W_8^7 \\ W_8^2 & W_8^6 & W_8^2 & W_8^6 \\ W_8^3 & W_8^1 & W_8^7 & W_8^5 \\ W_8^4 & W_8^4 & W_8^4 & W_8^4 \\ W_8^5 & W_8^7 & W_8^1 & W_8^3 \\ W_8^6 & W_8^2 & W_8^6 & W_8^2 \\ W_8^7 & W_8^5 & W_8^3 & W_8^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

# FFT

The  $e_k$  components result from the odd-number entries in  $x[n]$ .

$$\begin{bmatrix} b_0 \\ b_1 \\ b_2 \\ b_3 \end{bmatrix} = \begin{bmatrix} W_4^0 & W_4^0 & W_4^0 & W_4^0 \\ W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^0 & W_4^2 & W_4^0 & W_4^2 \\ W_4^0 & W_4^3 & W_4^2 & W_4^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^0 & W_8^2 & W_8^4 & W_8^6 \\ W_8^0 & W_8^4 & W_8^0 & W_8^4 \\ W_8^0 & W_8^6 & W_8^4 & W_8^2 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

$$\begin{bmatrix} e_0 \\ e_1 \\ e_2 \\ e_3 \\ e_4 \\ e_5 \\ e_6 \\ e_7 \end{bmatrix} = \begin{bmatrix} W_8^0 b_0 \\ W_8^1 b_1 \\ W_8^2 b_2 \\ W_8^3 b_3 \\ W_8^4 b_0 \\ W_8^5 b_1 \\ W_8^6 b_2 \\ W_8^7 b_3 \end{bmatrix} = \begin{bmatrix} W_8^0 & W_8^0 & W_8^0 & W_8^0 \\ W_8^1 & W_8^3 & W_8^5 & W_8^7 \\ W_8^2 & W_8^6 & W_8^2 & W_8^6 \\ W_8^3 & W_8^1 & W_8^7 & W_8^5 \\ W_8^4 & W_8^4 & W_8^4 & W_8^4 \\ W_8^5 & W_8^7 & W_8^1 & W_8^3 \\ W_8^6 & W_8^2 & W_8^6 & W_8^2 \\ W_8^7 & W_8^5 & W_8^3 & W_8^1 \end{bmatrix} \begin{bmatrix} x[1] \\ x[3] \\ x[5] \\ x[7] \end{bmatrix}$$

# FFT

---

Combine  $a_k$  and  $b_k$  to get  $c_k$ .

$$\begin{bmatrix} c_0 \\ c_1 \\ c_2 \\ c_3 \\ c_4 \\ c_5 \\ c_6 \\ c_7 \end{bmatrix} = \begin{bmatrix} d_0 + e_0 \\ d_1 + e_1 \\ d_2 + e_2 \\ d_3 + e_3 \\ d_4 + e_4 \\ d_5 + e_5 \\ d_6 + e_6 \\ d_7 + e_7 \end{bmatrix} = \begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \\ a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} + \begin{bmatrix} W_8^0 b_0 \\ W_8^1 b_1 \\ W_8^2 b_2 \\ W_8^3 b_3 \\ W_8^4 b_0 \\ W_8^5 b_1 \\ W_8^6 b_2 \\ W_8^7 b_3 \end{bmatrix}$$

FFT procedure:

- compute  $a_k$  and  $b_k$ :  $2 \times (4 \times 4) = 32$  multiplies
- combine  $c_k = a_k + W_8^k b_k$ : 8 multiplies
- total 40 multiplies: fewer than the original  $8 \times 8 = 64$  multiplies

## Scaling of FFT algorithm

---

How does the new algorithm scale?

Let  $M(N)$  = number of multiplies to perform an  $N$  point FFT.

$$M(1) = 0$$

$$M(2) = 2M(1) + 2 = 2$$

$$M(4) = 2M(2) + 4 = 2 \times 4$$

$$M(8) = 2M(4) + 8 = 3 \times 8$$

$$M(16) = 2M(8) + 16 = 4 \times 16$$

$$M(32) = 2M(16) + 32 = 5 \times 32$$

$$M(64) = 2M(32) + 64 = 6 \times 64$$

$$M(128) = 2M(64) + 128 = 7 \times 128$$

...

$$M(N) = (\log_2 N) \times N$$

Significantly smaller than  $N^2$  for  $N$  large.



## **Fourier Transform: Generalize to Aperiodic Signals**


---

An aperiodic signal can be thought of as periodic with infinite period.


## Fourier Transform: Generalize to Aperiodic Signals

An aperiodic signal can be thought of as periodic with infinite period.

Let  $x[n]$  represent an aperiodic signal DT signal.

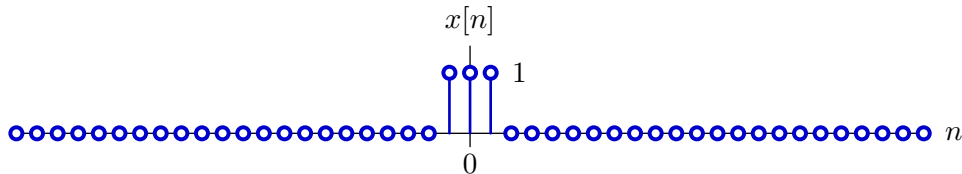


“Periodic extension”: 
$$x_N[n] = \sum_{k=-\infty}^{\infty} x[n + kN]$$

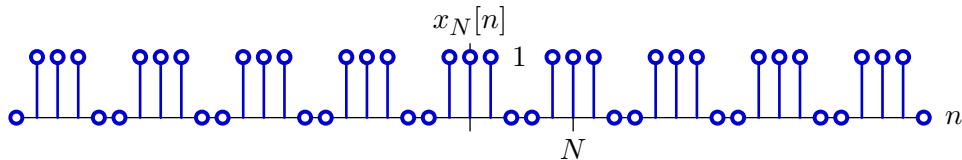


Then 
$$x[n] = \lim_{N \rightarrow \infty} x_N[n].$$

# Fourier Transform

Represent  $x_N[n]$  by its Fourier series.

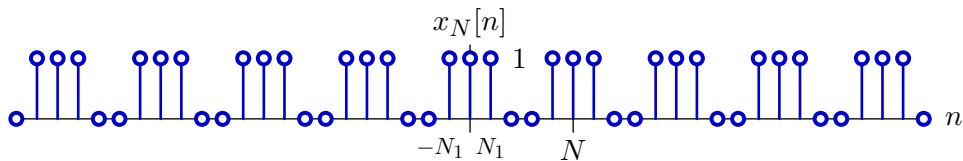


$$a_k = \frac{1}{N} \sum_N x_N[n] e^{-j\frac{2\pi}{N}kn} = \frac{1}{N} \sum_{n=-N_1}^{N_1} e^{-j\frac{2\pi}{N}kn} = \frac{1}{N} \frac{\sin\left(N_1 + \frac{1}{2}\right)\Omega}{\sin\frac{1}{2}\Omega}$$

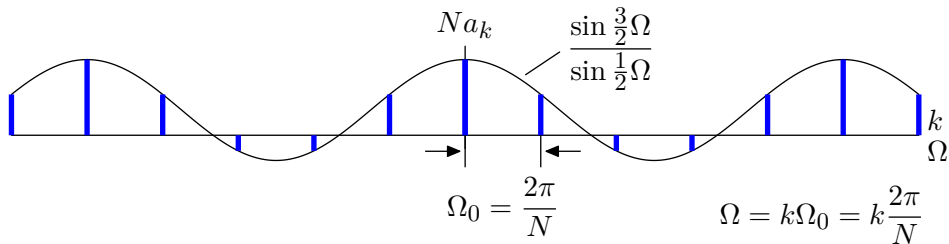


# Fourier Transform

Doubling period doubles # of harmonics in given frequency interval.

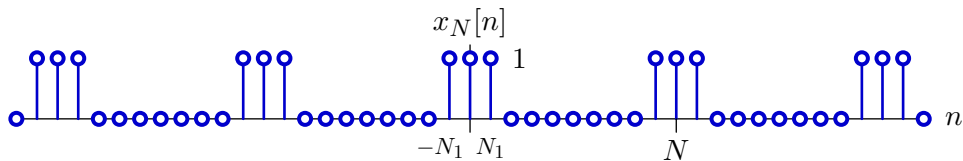


$$a_k = \frac{1}{N} \sum_N x_N[n] e^{-j\frac{2\pi}{N}kn} = \frac{1}{N} \sum_{n=-N_1}^{N_1} e^{-j\frac{2\pi}{N}kn} = \frac{1}{N} \frac{\sin(N_1 + \frac{1}{2})\Omega}{\sin\frac{1}{2}\Omega}$$

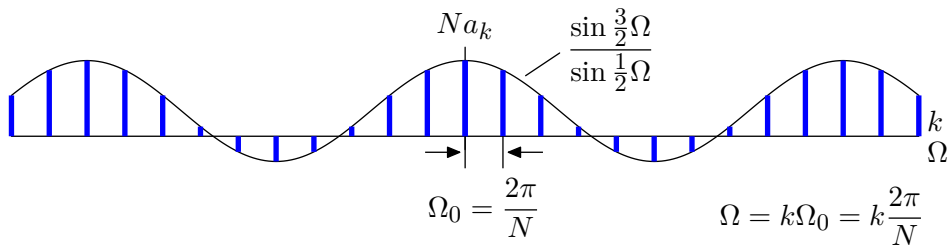


## Fourier Transform

As  $N \rightarrow \infty$ , discrete harmonic amplitudes  $\rightarrow$  a continuum  $E(\Omega)$ .

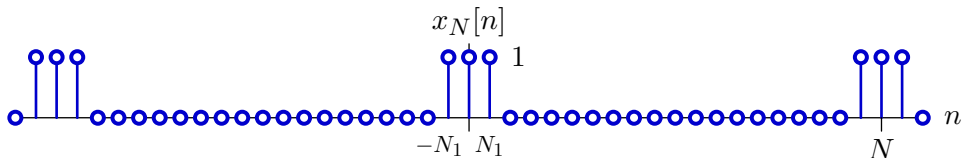



$$a_k = \frac{1}{N} \sum_N x_N[n] e^{-j\frac{2\pi}{N}kn} = \frac{1}{N} \sum_{n=-N_1}^{N_1} e^{-j\frac{2\pi}{N}kn} = \frac{1}{N} \frac{\sin\left(N_1 + \frac{1}{2}\right)\Omega}{\sin\frac{1}{2}\Omega}$$

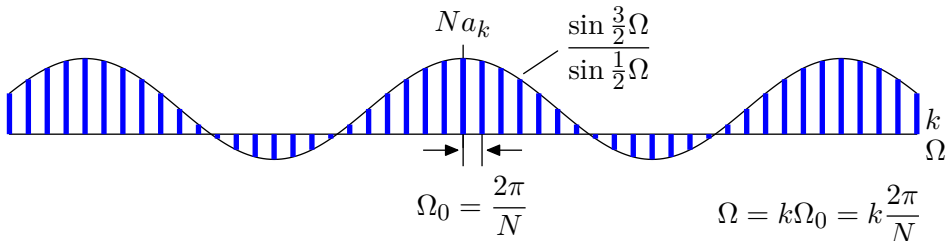

$$Na_k = \sum_{n=\langle N \rangle} x[n] e^{-j\frac{2\pi}{N}kn} = \sum_{n=\langle N \rangle} x[n] e^{-j\Omega n} = E(\Omega)$$

# Fourier Transform

As  $N \rightarrow \infty$ , synthesis sum  $\rightarrow$  integral.

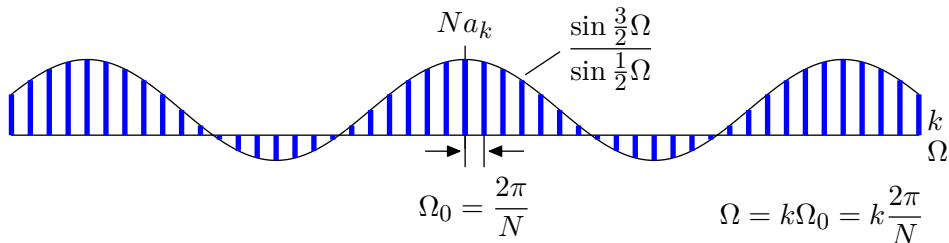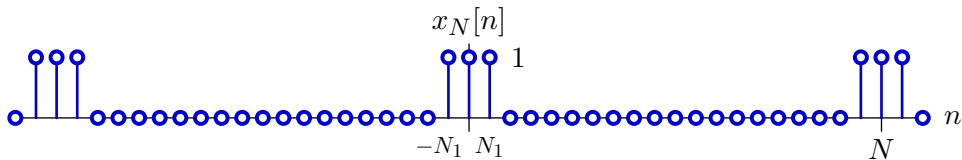

$$Na_k = \sum_{n=\langle N \rangle} x[n] e^{-j\frac{2\pi}{N}kn} = \sum_{n=\langle N \rangle} x[n] e^{-j\Omega n} = E(\Omega)$$

$$x[n] = \sum_{k=\langle N \rangle} \underbrace{\frac{1}{N} E(\Omega)}_{a_k} e^{j\frac{2\pi}{N}kn} = \sum_{k=\langle N \rangle} \frac{\Omega_0}{2\pi} E(\Omega) e^{j\Omega n} \rightarrow \frac{1}{2\pi} \int_{2\pi} E(\Omega) e^{j\Omega n} d\Omega$$

## Fourier Transform

---

Replacing  $E(\Omega)$  by  $X(e^{j\Omega})$  yields the DT Fourier transform relations.

$$X(e^{j\Omega}) = \sum_{n=-\infty}^{\infty} x[n]e^{-j\Omega n} \quad (\text{"analysis" equation})$$

$$x[n] = \frac{1}{2\pi} \int_{2\pi} X(e^{j\Omega})e^{j\Omega n} d\Omega \quad (\text{"synthesis" equation})$$

## Relation between Fourier and Z Transforms

---

If the Z transform of a signal exists and if the ROC includes the unit circle, then the Fourier transform is equal to the Z transform evaluated on the unit circle.

Z transform:

$$X(z) = \sum_{n=-\infty}^{\infty} x[n]z^{-n}$$

DT Fourier transform:

$$X(e^{j\Omega}) = \sum_{n=-\infty}^{\infty} x[n]e^{-j\Omega n} = H(z)|_{z=e^{j\Omega}}$$



## Relation between Fourier and Z Transforms

---

Fourier transform “inherits” properties of Z transform.

---

Property	$x[n]$	$X(z)$	$X(e^{j\Omega})$
Linearity	$ax_1[n] + bx_2[n]$	$aX_1(z) + bX_2(z)$	$aX_1(e^{j\Omega}) + bX_2(e^{j\Omega})$
Time shift	$x[n - n_0]$	$z^{-n_0}X(z)$	$e^{-j\Omega n_0}X(e^{j\Omega})$
Multiply by $n$	$nx[n]$	$-z \frac{d}{dz}X(z)$	$j \frac{d}{d\Omega}X(e^{j\Omega})$
Convolution	$(x_1 * x_2)[n]$	$X_1(z) \times X_2(z)$	$X_1(e^{j\Omega}) \times X_2(e^{j\Omega})$


---

# DT Fourier Series of Images


---



Magnitude




Angle




# DT Fourier Series of Images

---

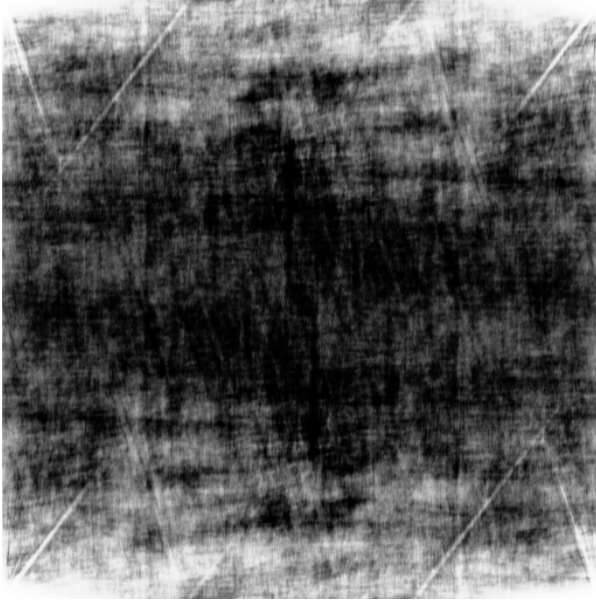

Magnitude



Uniform Angle




# DT Fourier Series of Images



Uniform  
Magnitude




Angle




# DT Fourier Series of Images


---

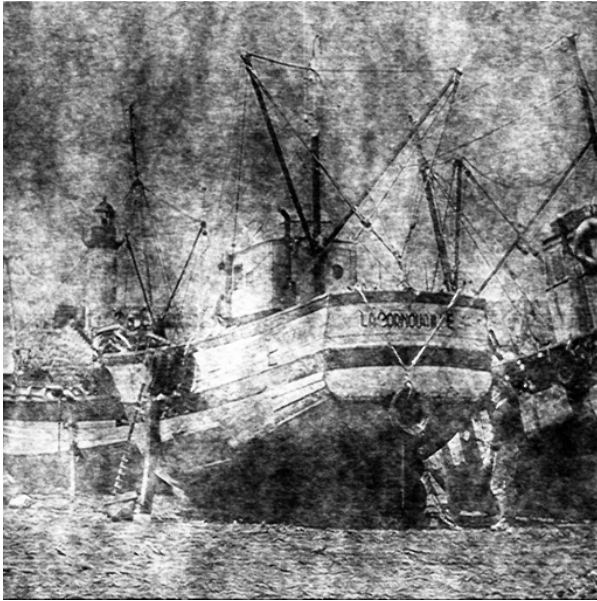

Different  
Magnitude




Angle




# DT Fourier Series of Images


---

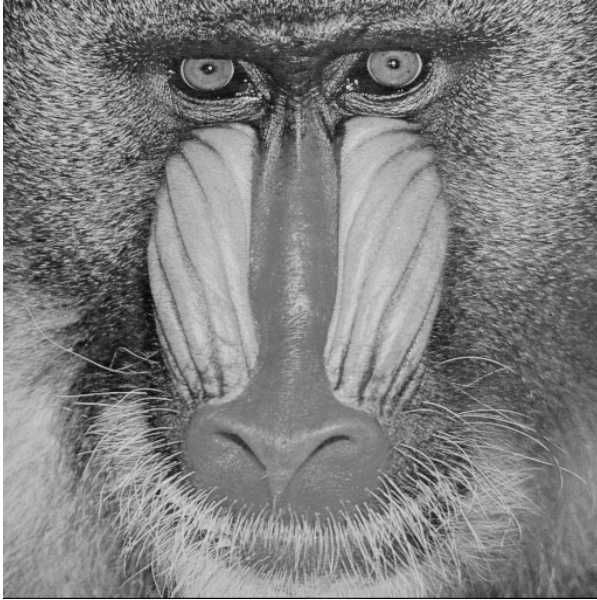

Magnitude



Angle




# DT Fourier Series of Images


---



Magnitude




Angle




# DT Fourier Series of Images


---

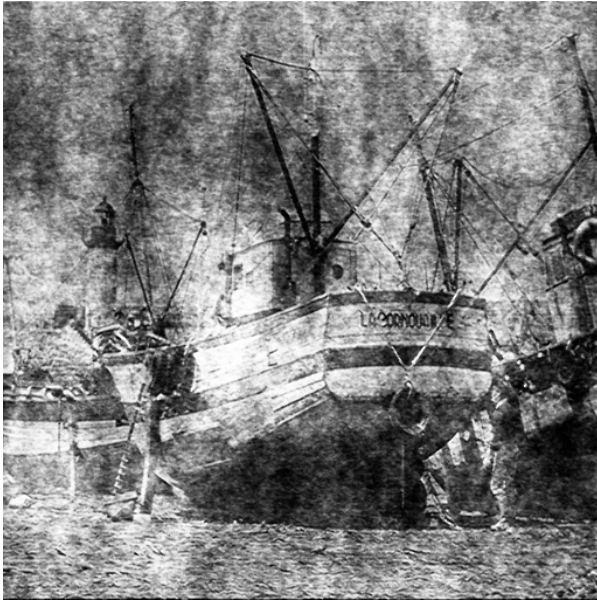

Different  
Magnitude



Angle





## Fourier Representations: Summary

---

Thinking about signals by their frequency content and systems as filters has a large number of practical applications.