

Massachusetts Institute of Technology
Department of Electrical Engineering and Computer Science
6.111 - Introductory Digital Systems Laboratory

Problem Set 1 Solutions

Issued: February 14, 2005

Problem 1: Boolean Algebra Practice Problems (*Problem 1 was not graded.*)


- 1) $a + 0 = a$
- 2) $\bar{a} \cdot 0 = 0$
- 3) $a + \bar{a} = 1$
- 4) $a + a = a$
- 5) $a + ab = a(1 + b) = a$
- 6) $a + \bar{a}b = (a + \bar{a})(a + b) = a + b$
- 7) $a(\bar{a} + b) = a\bar{a} + ab = ab$
- 8) $ab + \bar{a}b = b(a + \bar{a}) = b$
- 9) $(\bar{a} + \bar{b})(\bar{a} + b) = \bar{a}\bar{a} + \bar{a}b + \bar{b}\bar{a} + \bar{b}b = \bar{a} + \bar{a}b + \bar{a}\bar{b} = \bar{a}(1 + b + \bar{b}) = \bar{a}$
- 10) $a(a + b + c + \dots) = aa + ab + ac + \dots = a + ab + ac + \dots = a$
- 11) $f(a, b, ab) = a + b + ab = a + b$
- 12) $f(a, b, \bar{a} \cdot \bar{b}) = a + b + \overline{\bar{a} \cdot \bar{b}} = a + b + \bar{a} = 1$
- 13) $f[a, b, \overline{(ab)}] = a + b + \overline{(ab)} = a + b + \bar{a} + \bar{b} = 1$
- 14) $y + y\bar{y} = y$
- 15) $xy + x\bar{y} = x(y + \bar{y}) = x$
- 16) $\bar{x} + y\bar{x} = \bar{x}(1 + y) = \bar{x}$
- 17) $(w + \bar{x} + y + \bar{z})y = y$
- 18) $(x + \bar{y})(x + y) = x$
- 19) $w + [w + (wx)] = w$
- 20) $x[x + (xy)] = x$
- 21) $\overline{(\bar{x} + x)} = x$
- 22) $\overline{(x + \bar{x})} = 0$
- 23) $w + (w\bar{x}yz) = w(1 + \bar{x}yz) = w$
- 24) $\bar{w} \cdot \overline{(wxyz)} = \bar{w}(\bar{w} + \bar{x} + \bar{y} + \bar{z}) = \bar{w}$
- 25) $xz + \bar{x}y + zy = xz + \bar{x}y$
- 26) $(x + z)(\bar{x} + y)(z + y) = (x + z)(\bar{x} + y)$
- 27) $\bar{x} + \bar{y} + xy\bar{z} = \bar{x} + \bar{y} + \bar{z}$

Problem 2: Karnaugh Maps and Minimal Expressions


i) Truth Tables

<u>abcd</u>	1)	<u>wxyz</u>	2)	<u>abcd</u>	3)
0000	0	0000	1	0000	0
0001	1	0001	1	0001	1
0010	0	0010	0	0010	1
0011	0	0011	1	0011	0
0100	0	0100	0	0100	0
0101	1	0101	0	0101	1
0110	0	0110	0	0110	0
0111	0	0111	1	0111	0
1000	0	1000	0	1000	0
1001	0	1001	0	1001	1
1010	0	1010	0	1010	1
1011	0	1011	0	1011	0
1100	0	1100	1	1100	0
1101	0	1101	1	1101	1
1110	1	1110	0	1110	0
1111	0	1111	1	1111	0


ii) Karnaugh Maps

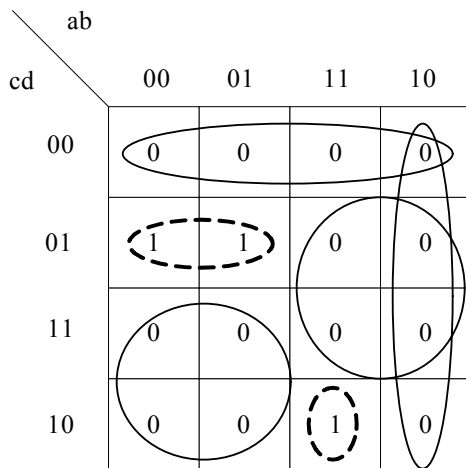

(1)

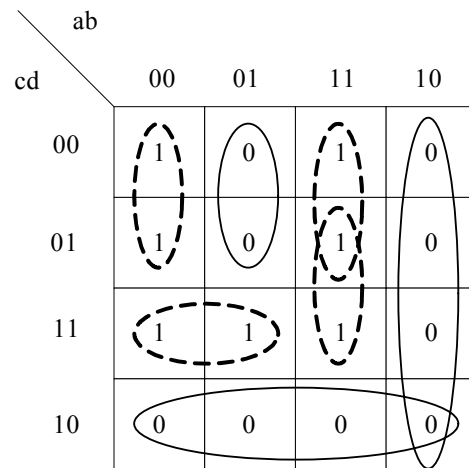

(2)

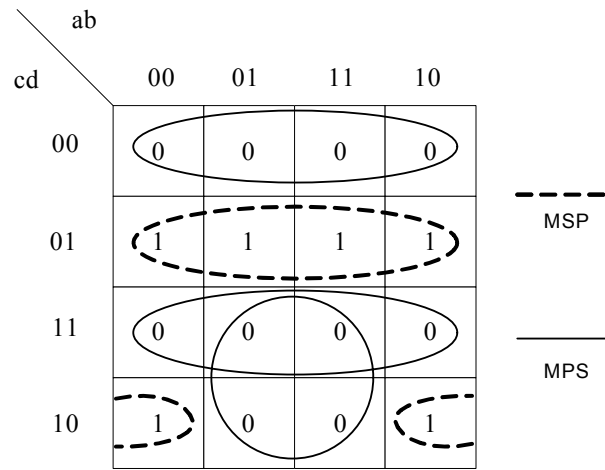

(3)

iii) Minimum Sum of Products

(1) $\bar{a} \cdot \bar{c} \cdot d + a \cdot b \cdot c \cdot \bar{d}$

(2) $\bar{a} \cdot \bar{b} \cdot \bar{c} + \bar{a} \cdot \bar{b} \cdot d + a \cdot b \cdot \bar{c} + a \cdot b \cdot d + \bar{a} \cdot c \cdot d$

(3) $\bar{c} \cdot d + \bar{b} \cdot c \cdot \bar{d}$


iv) Minimum Product of Sums

(1) $(c + d)(\bar{a} + b)(\bar{a} + \bar{d})(a + \bar{c})$


(2) $(\bar{c} + d)(\bar{a} + b)(a + \bar{b} + c)$

(3) $(c + d)(\bar{c} + \bar{d})(\bar{b} + \bar{c})$

Problem 3: Karnaugh Maps with “Don’t Cares”

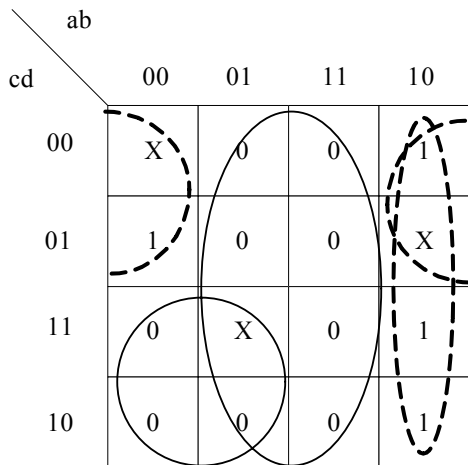

(1)

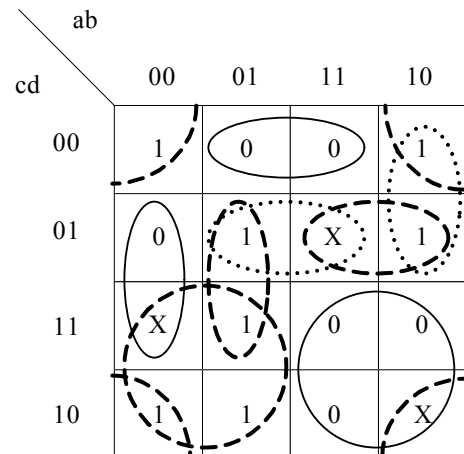

(2)

(1)

- i. $\bar{b} \cdot \bar{c} + a \cdot \bar{b}$
- ii. $\bar{b} \cdot (\bar{c} + a)$
- iii. Both solutions are unique.
- iv. Yes, MSP = MPS

(2)

- i. $\bar{b} \cdot \bar{d} + c \cdot \bar{a} + \bar{a} \cdot b \cdot d + a \cdot \bar{c} \cdot d$
- ii. $(\bar{b} + c + d)(\bar{a} + \bar{c})(a + b + \bar{d})$
- iii. The MSP solution is unique, the MPS is not.
 In the MPS: $\bar{a} \cdot b \cdot d$ can be replaced with $\bar{c} \cdot b \cdot d$.
 $a \cdot \bar{c} \cdot d$ can be replaced with $a \cdot \bar{c} \cdot \bar{b}$.
- iv. No, MSP \neq MPS.

Problem 4: DeMorgan's Theorem

1. $\overline{(\bar{a} \cdot \bar{b} \cdot \bar{c} \cdot \bar{d})} = a + \bar{b} + c + d$
2. $\overline{(a + \bar{b} + c + \bar{d})} = a \cdot b \cdot \bar{c} \cdot d$
3. $(a \cdot \bar{d}) \cdot (\bar{b} \cdot c) \cdot (c \cdot \bar{d}) = a \cdot \bar{b} \cdot c \cdot \bar{d}$

Problem 5: Setup and Hold times for D Flip-Flop

- 1) The setup time is twice the delay of the inverter, the hold time is zero.
- 2) The new memory element is a negative edge triggered flip-flop.
- 3) The setup time is $2t_{inv}$, the hold time is zero, and the clock to Q delay is $2t_{inv}$.

Problem 6: Transistor Level Synthesis

$$F = \overline{A \cdot (B + C)} \rightarrow$$

