

# ACTIVE THERMAL CONTROL OF DISTRIBUTED PARAMETER SYSTEMS EXCITED AT MULTIPLE FREQUENCIES

**Christoph C. Richter**

Institut für Thermodynamik  
Technische Universität Braunschweig  
Hans-Sommer-Straße 5  
38106 Braunschweig, Germany  
Email: ch.richter@tu-bs.de

**John H. Lienhard V**

Department of Mechanical Engineering  
Massachusetts Institute of Technology  
77 Massachusetts Avenue, Room 3-162  
Cambridge, MA 02139-4307  
Email: lienhard@mit.edu

## ABSTRACT

*In testing packaged high-power integrated circuits, active thermal control is useful in providing die-level temperature stability. A time-varying heat load is applied to the surface of the package to compensate for the time-varying test power sequence applied to the die. An earlier study determined the proper control heat load for a single-frequency sinusoidal variation in die power subject to a finite allowed temperature variation on the die. Actual test power sequences contain many frequencies at various phase angles, each contributing to the temperature variation of the die. In the present study, we develop a method of controlling multiple frequency test sequences subject to a finite temperature tolerance. It is shown that the total control power may be minimized assigning temperature tolerances to the highest frequencies in the test power sequence.*

**Keywords:** Conduction, control, electronics, heat transfer, temperature

## 1 INTRODUCTION

Precise temperature control of high-power microprocessor devices during testing is very important in order to properly classify the device performance [1]. The device manufacturer specifies a temperature and an allowed deviation from it during the testing procedure (e.g., 85° C  $-0/+2$ ° C). A temperature deviation larger than the prescribed one might lead to an improper classification of the tested integrated circuit device (e.g., a 2 GHz device is classified as an 1.8 GHz device) due to reduced signal propagation speeds at higher temperatures [2]. The test process applies computer-controlled electrical signals to the device, and, for high-power devices, this may result die-average power density in the range of 100 kW/m<sup>2</sup>. The frequency components of the die-average power that are energetic enough to affect die temperature range from zero to a hundred hertz or so.

Feedback control of the die temperature is usually not possible, owing to the lack of an accessible die-level temperature sensor. A alternative approach to thermal management in automatic testing equipment was proposed and tested by Sweetland, Lienhard and Slocum [2,3]. In this approach, the surface of the device under test is heated with laser radiation while simultaneously cooled by forced convection. Through modulation of the laser power, the device temperature can be dynamically stabilized to within a set tolerance.

A significant complication in this scheme arises from the time required for temperature signal propagation from the device package surface to the die, upon which the power is actually dissipated. Figure 1 provides a cross-sectional view of a typical high-power microprocessor device. Sweetland and Lienhard [4] analyzed the effect of the conductive time lag on the control power for sinusoidal die power, showing that it tends to increase the required laser power substantially, and leads to optical powers several times larger than the die power. Minimization of the required laser power, which can amount to hundreds of watts or more, is of great importance in order to limit both the electrical power consumed by the control system and the added load on the test facility's cooling system.

This paper extends the analysis of Sweetland and Lienhard [4] to multifrequency waveforms, with the aim of determining optimal control power for multifrequency test power sequences. We show that the control profile calculation with specified die temperature tolerance presented in [4] is not suitable for non-sinusoidal die power profiles, and we develop a new approach for this situation.

## 2 SINGLE FREQUENCY DIE POWER PROFILES

The mathematical method follows the one-dimensional model of Sweetland and Lienhard [4]. Figure 1 shows a typical cross-section of a high-power microprocessor device. For transient response, the physical model of such a device is reduced to the one-dimensional model shown in Fig. 2 as detailed in [4]. The most important parts for the thermal analysis are the silicon die and the integrated heat spreader (IHS) which is typically made from plated copper. A thin layer of a thermal interface material or grease is used to optimize the heat exchange between die and IHS. As in the previous work, the interface material is taken to have thermal resistance, but negligible heat capacity; and losses to the device substrate are set to zero, giving an upper bound on control power. As in the earlier study, die's heat generation is taken to be uniform over its area, so that attention may be focused on the analysis of frequency effects on the control scheme (see [5] for numerical studies of non-uniform die heating).

The steady periodic transient response can be found using a complex temperature approach [6]. All steady components of power and temperature be may set to zero, by superposition, and attention will be directed to the time-varying response. It is assumed that the solution to the temperature profile in the complex plane takes the form

$$W(x, t) = X(x)e^{i\omega t} \quad (1)$$

where  $i = \sqrt{-1}$  is the imaginary number and  $\omega$  is the frequency of die power variation;  $x$  is measured from the convection-side of the IHS. The one-dimensional conduction equation in the IHS can be written

$$\frac{\partial^2 W(x,t)}{\partial x^2} = \frac{1}{a_t} \frac{\partial W(x,t)}{\partial t} \quad (2)$$

where  $a_t$  is the thermal diffusivity of the IHS material. The general solution for this equation is known to be

$$X(x) = c_1 e^{-xL(i+1)} + c_2 e^{xL(i+1)} \quad (3)$$

where  $L \equiv \sqrt{\omega/2a_t}$  is the unsteady diffusion scale in the IHS.

## 2.1 IHS Temperature Response

The transient temperature response of the IHS can be found by decomposing the model shown in Fig. 2 into two subsystems and superimposing the results [4], removing all steady components of optical heating, cooling, and die heating. The transient component of die power is a single frequency profile of the form

$$q_d(t) = Q_d \cos(\omega t) \quad (4)$$

where  $Q_d$  is the die power density. In this first step of the analysis, the die power is applied directly to the die-side of the IHS ignoring the influences of the die and the thermal interface material. The convection-side of the IHS is subject to convective boundary conditions, an average heat transfer coefficient  $h_c$  with an air temperature  $T_{air} = 0$  K, by superposition, and a control power flux

$$q_c(t) = Q_c \cos(\omega t + \alpha) \quad (5)$$

where  $Q_c$  is the control power density and  $\alpha$  is a phase shift. Of special interest is the die side or back-face (BF) temperature of the IHS which can be found to be

$$\begin{aligned} T_{BF}(t) = & \frac{2Q_c e^{bL}}{kL(A^2 + B^2)} \left\{ [A \cos \alpha + B \sin \alpha] \cos(\omega t) + [B \cos \alpha - A \sin \alpha] \sin(\omega t) \right\} \\ & + \frac{Q_d e^{-bL}}{kL(P^2 + R^2)} \left\{ [U \cos(bL) + V \sin(bL)] \cos(\omega t) + [U \sin(bL) - V \cos(bL)] \sin(\omega t) \right\} \\ & + \frac{Q_d e^{bL}}{kL(P^2 + R^2)} \left\{ [P \cos(bL) + R \sin(bL)] \cos(\omega t) + [R \cos(bL) - P \sin(bL)] \sin(\omega t) \right\} \end{aligned} \quad (6)$$

where  $b$  is the IHS thickness and  $k$  its thermal conductivity.  $A$ ,  $B$ ,  $P$ ,  $R$ ,  $U$ , and  $V$  are mathematical constants as defined in [4] and are given in Appendix A. It should be noted that the constants only depend on  $bL$ , which is a dimensionless frequency parameter, and the Biot number for the convection-side of the IHS,  $Bi_{IHS} = h_c b/k$ .

## 2.2 Temperature Response of Die

The die normally has small thermal resistance and can be treated as isothermal for the frequencies of interest. Its temperature response can be described by a lumped capacitance model [4]

$$mc_p \frac{dT_{DIE}}{dt} = Q_d \cos(\omega t) - \frac{T_{DIE} - T_{BF}}{R_t} \quad (7)$$

where  $m$  is the die mass per unit area and  $c_p$  is the specific heat capacity of the die at constant pressure;  $R_t$  is the thermal contact resistance of the interface material. This equation neglects the heat capacity of the thermal interface material between the die and the IHS. The die is lumped because the Biot number  $b_{DIE}/(R_t k_{DIE})$  is small (in the example below, its value is 0.032).

For ideal die temperature control ( $T_{DIE}(t) = \text{const.}$  and  $dT_{DIE}/dt = 0$ ), Eq. (7) can be written as

$$T_{BF}(t) = -Q_d R_t \cos(\omega t) \quad (8)$$

where the steady component  $T_{DIE}$  is set to zero, again by superposition. To compute the control power density amplitude and phase shift,  $Q_c$  and  $\alpha$ , that are required to produce the IHS back-face temperature given in Eq. (8), Eq. (6) can be used. The result is

$$\left\{ \frac{2Q_c e^{bL}}{A^2 + B^2} [A \cos \alpha + B \sin \alpha] + C_1 Q_d + Q_d k L R_t \right\} \cos(\omega t) + \left\{ \frac{2Q_c e^{bL}}{A^2 + B^2} [B \cos \alpha - A \sin \alpha] + C_2 Q_d \right\} \sin(\omega t) = 0 \quad (9)$$

with the additional definitions

$$C_1 = \frac{e^{-bL} [U \cos(bL) + V \sin(bL)] + e^{bL} [P \cos(bL) + R \sin(bL)]}{P^2 + R^2} \quad (10)$$

$$C_2 = \frac{e^{-bL} [U \sin(bL) - V \cos(bL)] + e^{bL} [R \cos(bL) - P \sin(bL)]}{P^2 + R^2} \quad (11)$$

Eq. (9) must hold true for any time  $t$ . Therefore, the sine and cosine terms have to vanish separately. Using this requirement, the phase shift  $\alpha$  can be computed as

$$\alpha = \arctan \left( \frac{C_1 B + B k L R_t - C_2 A}{C_2 B + A k L R_t + C_1 A} \right) \quad (12)$$

The phase shift  $\alpha$  is always picked so that the control power density,  $Q_c$ , becomes positive

$$Q_c = -\frac{A^2 + B^2}{2e^{bL} [A \cos \alpha + B \sin \alpha]} \{C_1 + k L R_t\} Q_d \quad (13)$$

### 2.3 Control Profile Calculation with Specified Die Temperature Tolerance

Sweetland and Lienhard [4] assume in their analysis a back-face IHS temperature profile,  $T_{BF}(t)$ , and use this profile to compute the optimal control power for control to a prescribed temperature tolerance. This method yields a small control power density but not the optimal control power density. Instead of assuming a back-face IHS temperature, the die temperature profile,  $T_{DIE}(t)$ , is assumed to be

$$T_{DIE}(t) = \frac{\Delta T}{2} \cos(\omega t + \beta) \quad (14)$$

where  $\Delta T$  is the prescribed temperature tolerance for the device under test<sup>1</sup> and  $\beta$  is an unknown phase shift. In order to compute the control power profile, the back-face IHS temperature profile has to be known. This profile can be computed by using Eq. (14) in Eq. (7) and rearranging the resulting equation to  $T_{BF}$

$$T_{BF}(t) = - \left\{ \frac{\omega}{\lambda} \frac{\Delta T}{2} \cos \beta + \frac{\Delta T}{2} \sin \beta \right\} \sin(\omega t) - \left\{ \frac{\omega}{\lambda} \frac{\Delta T}{2} \sin \beta - \frac{\Delta T}{2} \cos \beta + Q_d R_t \right\} \cos(\omega t) \quad (15)$$

where  $\lambda = 1/mc_p R_t$  ( $1/\lambda$  is the lumped-capacity time constant associated with Eq. (7)). To derive Eq. (6) it was assumed that the die power is applied at the back-face of the IHS neglecting the thermal contact resistance,  $R_t$ . Equation (7) can be used to find the actual heat flux from the die into the IHS. This heat flux takes on the form

$$q_{BF}(t) = Q_{BF} \cos(\omega t + \gamma) \quad (16)$$

with

$$Q_{BF} = \frac{1}{2} \sqrt{4Q_d^2 + 4Q_d \omega mc_p \Delta T \sin \beta + (\omega mc_p \Delta T)^2} \quad (17)$$

$$\gamma = \arctan \left( - \frac{\omega mc_p \Delta T \cos \beta}{\omega mc_p \Delta T \sin \beta + 2Q_d} \right) \quad (18)$$

Using this corrected heat flux, Eq. (6) can be written as

$$\begin{aligned} T_{BF}(t) = & \left\{ \frac{2Q_c e^{bL}}{A^2 + B^2} [A \cos \alpha + B \sin \alpha] + \frac{kL}{\lambda} \omega \frac{\Delta T}{2} \sin \beta - kL \frac{\Delta T}{2} \cos \beta + Q_d kL R_t \right. \\ & \left. + (C_1 + C_2 \tan \gamma) \left( Q_d + \omega mc_p \frac{\Delta T}{2} \sin \beta \right) \right\} \cos(\omega t) \\ & + \left\{ \frac{2Q_c e^{bL}}{A^2 + B^2} [B \cos \alpha - A \sin \alpha] + \frac{kL}{\lambda} \omega \frac{\Delta T}{2} \cos \beta + kL \frac{\Delta T}{2} \sin \beta \right. \\ & \left. + (C_2 - C_1 \tan \gamma) \left( Q_d + \omega mc_p \frac{\Delta T}{2} \sin \beta \right) \right\} \sin(\omega t) \end{aligned} \quad (19)$$

<sup>1</sup> $\Delta T$  is defined as the peak-to-peak amplitude of the die temperature profile to be consistent with [4].

This equation has to hold true for any time  $t$ , which yields a phase shift  $\alpha$

$$\alpha = \arctan \left( \frac{-(C_2^* \lambda B + C_1^* \omega A) \Delta T \cos \beta + (C_1^* \omega B - C_2^* \lambda A) \Delta T \sin \beta + (C_1 B + B k L R_t - C_2 A) \lambda 2 Q_d}{(C_1^* \omega B - C_2^* \lambda A) \Delta T \cos \beta + (C_2^* \lambda B + C_1^* \omega A) \Delta T \sin \beta + (C_2 B + A k L R_t + C_1 A) \lambda 2 Q_d} \right) \quad (20)$$

where  $C_1^*$  and  $C_2^*$  are defined as

$$C_1^* = kL + \lambda m c_p C_1 \quad \text{and} \quad C_2^* = kL + \omega m c_p C_2 \quad (21)$$

The control power for this control case can be computed by substituting Eq. (20) into

$$Q_c = -\frac{A^2 + B^2}{2e^{bL} [A \cos \alpha + B \sin \alpha]} \left\{ \frac{kL}{\lambda} \omega \frac{\Delta T}{2} \sin \beta - kL \frac{\Delta T}{2} \cos \beta + Q_d k L R_t + (C_1 + C_2 \tan \gamma) \left( Q_d + \omega m c_p \frac{\Delta T}{2} \sin \beta \right) \right\} \quad (22)$$

which is derived from Eq. (19) by forcing sine and cosine terms to vanish separately. The phase shift  $\alpha$  is again picked so that the control power density,  $Q_c$ , becomes positive.

The solution for  $\alpha$  and  $Q_c$  is still dependent on the unknown phase shift  $\beta$ . To find the optimal control power, Eq. (22) has to be minimized with respect to  $\beta$ . This can be done by substituting Eq. (20) into Eq. (22) and setting the first derivative with respect to  $\beta$  of this equation to zero. This yields

$$\beta = -\arctan \left( \frac{\left( \omega C_1 + \lambda C_2 + (kL + \lambda m c_p C_1) \omega R_t \right) kL + \omega m c_p \left( C_1^2 + C_2^2 \right) \lambda}{\left( \lambda C_1 - \omega C_2 + (kL + \omega m c_p C_2) \lambda R_t \right) kL} \right) \quad (23)$$

Using this equation for  $\beta$  in Eq. (20) simplifies the phase shift  $\alpha$  to

$$\alpha = \arctan \left( \frac{C_1 B + B k L R_t - C_2 A}{C_2 B + A k L R_t + C_1 A} \right) \quad (24)$$

This phase shift is identical to that previously derived for control at constant die temperature (Eq. (12)): the resulting phase shift is not dependent on the prescribed temperature tolerance  $\Delta T$ . Using Eq. (22) and setting the control power density to zero ( $Q_c = 0 \text{ W/m}^2$ ), allows us to compute the maximal temperature fluctuation (peak-to-peak) for a given die power profile, which occurs when no control power is applied

$$\Delta T_{max} = \frac{(kL R_t + C_1) \lambda 2 Q_d}{(kL + \omega m c_p C_2) \lambda \cos \beta - (kL + \lambda m c_p C_1) \omega \sin \beta} \quad (25)$$

It is interesting to note that the control power density,  $Q_c$ , is linearly dependent on the prescribed temperature tolerance,  $\Delta T$ , for the optimal control case

$$Q_c = Q_{c0} - Q_{c1} \Delta T \quad (26)$$

where

$$Q_{c0} = -\frac{A^2 + B^2}{2e^{bL}[A \cos \alpha + B \sin \alpha]} \{C_1 + kLR_t\} Q_d \quad (27)$$

$$Q_{c1} = \frac{A^2 + B^2}{4e^{bL}[A \cos \alpha + B \sin \alpha]} \left\{ \left( kL \frac{\omega}{\lambda} + \omega mc_p C_1 \right) \sin \beta - (kL + \omega mc_p C_2) \cos \beta \right\} \quad (28)$$

The constant part of the control power density,  $Q_{c0}$ , is the control power that has been calculated previously for control to constant die temperature (Eq. (13)). The linear coefficient,  $Q_{c1}$ , is not dependent on the die power density,  $Q_d$ , but will increase with an increase in the frequency of die power fluctuation,  $\omega$ . This result is of special importance for the discussion of non-sinusoidal control power profiles.

Using the method presented in [4] to compute the optimal control profile for a prescribed temperature tolerance, the phase shift  $\beta$  was found to be

$$\beta = \arctan(-\omega mc_p R_t) \quad (29)$$

This phase shift will yield a small, but not optimal, control power density as can be seen in the following example.

## 2.4 Example

A dimensional example for the control of a single frequency die power profile to a prescribed temperature tolerance is given in Fig. 3. The material data for this example is given in Table 1, and further properties, including the geometry, are presented in Table 2. (The geometrical values are representative and are chosen only for purposes of illustration.) The die power profile is given by Eq. (4) with a frequency of 5 Hz and a die power density magnitude of  $Q_d = 10 \text{ W/cm}^2$ . The prescribed temperature tolerance is varied from 0 K to 7 K in increments of 1 K. The center point in Fig. 3 marks the solution for a constant die temperature,  $\Delta T \equiv 0$ . Every ring around this center point represents the solution for a single prescribed temperature tolerance and phase shifts  $0 \leq \beta \leq 2\pi$ . The optimal solution is represented by the vertical line at  $\beta = 330.21^\circ$ : note that the intersection points of the optimal solution and the rings are equally spaced; this follows from Eq. (26). The points computed using the method proposed by Sweetland and Lienhard [4] are marked with circles. It can be seen that they are relatively close to the optimal solution in terms of the control power density,  $Q_c$ , but yield different phase shifts  $\alpha$ . The maximal temperature fluctuation for this example can be computed from Eq. (25), giving  $\Delta T_{max} = 7.67 \text{ K}$ .

Figure 4 shows the effect of die power frequency variation on the required control power. The upper line indicates the control power needed to obtain a constant die temperature,  $Q_{c0}$ . This power grows rapidly with rising frequency due to the fact that the thermal mass of the IHS has to be driven over the same temperature difference faster at higher die power frequency. Clearly, control to zero fluctuation will become impractical owing to the very high control powers required. Commercially available diode lasers will be limited to optical powers of a few hundred watts or so, facilitating heat fluxes in the range of several hundred watts per square centimeter at most [2, 3].

The lower line in Fig. 4 shows the control power that can be saved by allowing the die temperature to fluctuate with a representative peak-to-peak amplitude of  $\Delta T = 1$  K. This lower line will be the same for all die power densities  $Q_d$  since  $Q_{c1} \neq f(Q_d)$ . The net control power with a fluctuation,  $Q_c$  in Eq. (26), can be seen to decrease as the allowed tolerance  $\Delta T$  is increased, a fact that will be important for control of a non-sinusoidal die power profile.

### 3 NON-SINUSOIDAL DIE POWER PROFILES

The computation of control power profiles for the more realistic case of non-sinusoidal die power is based on the equations derived in the previous section. Instead of using the die power profile defined in Eq. (4), this profile now becomes a series. In general, this may be an infinite series, but significant power will be associated with only the first  $N$  terms, where  $N$  must be determined on a case by case basis. The die power profile may thus be written as a truncated series

$$q_d(t) = \sum_{n=1}^N (Q_d)_n \cos(\omega_n t + \varphi_n) \quad (30)$$

where  $n$  denotes the  $n$ th frequency and  $\varphi_n$  its phase shift. The control power profile for this more realistic die power profile is

$$q_c(t) = \sum_{n=1}^N (Q_c)_n \cos(\omega_n t + \varphi_n + \alpha_n) \quad (31)$$

In order to control the die temperature to a prescribed total temperature tolerance, a die temperature profile of the following form is assumed

$$T_{DIE}(t) = \sum_{n=1}^N \frac{\Delta T_n}{2} \cos(\omega_n t + \varphi_n + \beta_n) \quad (32)$$

The difficulty in controlling a non-sinusoidal die power profile arises from this equation. The prescribed temperature tolerance,  $\Delta T$ , is the peak-to-peak amplitude of Eq. (32). There is no *a priori* basis for dividing this total tolerance among the amplitudes and phase shifts of the individual frequencies,  $\Delta T_n$ . If the individual tolerances,  $\Delta T_n$ , are specified, then the corresponding control power for frequency  $\omega_n$  may be calculated by using the same method as for a single frequency to find  $(Q_c)_n$  and  $\alpha_n$ . An optimal division of the total tolerance among the component frequencies may be calculated analytically only for certain simple cases, and in general it must be found by numerical iteration.

An upper bound on the amplitude of Eq. (32) is given by

$$\Delta T = \sum_n \Delta T_n \quad (33)$$

which can be used for an initial guess of the temperature tolerances,  $\Delta T_n$ . Some iteration will usually be necessary to get from this initial guess to the optimal solution. The proposed process of splitting the total temperature tolerance follows from one main conclusion from



the previous section: the possible gain in control power for a specific temperature tolerance is larger the higher the frequency. In other words, applying a temperature tolerance to a higher frequency will lead a larger reduction of the required control power than applying the same temperature tolerance to a lower frequency. Therefore, the following steps will yield an optimized control power profile:

1. Sort the frequency data according to their frequencies,  $\omega_n$  (where  $n = 1 \dots N$ ), starting with the lowest frequency that gets the index  $n = 1$ . Compute the maximal temperature fluctuation for the uncontrolled case,  $(\Delta T_{max})_n$ , for each frequency using Eq. (25).
2. The total prescribed temperature tolerance,  $\Delta T$ , can now be split into temperature tolerances for each frequency,  $\Delta T_n$ . This can be done using Eq. (33) as follows. The splitting process starts with the highest frequency ( $n = N$ ). If the total prescribed temperature tolerance is larger than the maximal temperature fluctuation for this frequency  $n$ , its prescribed temperature tolerance is simply

$$\Delta T_n = (\Delta T_{max})_n \quad (34)$$

and this temperature tolerance is subtracted from the total prescribed temperature tolerance. This step is repeated for the next lower frequency until the remaining total prescribed temperature tolerance is smaller than the maximal temperature fluctuation,  $(\Delta T_{max})_n$ . If that is the case, the temperature tolerance  $\Delta T_n$  becomes

$$\Delta T_n = \Delta T - \sum_{n+1}^N (\Delta T_{max})_n \quad (35)$$

All remaining lower frequencies have to be controlled to  $\Delta T_n = 0$  K.

3. The control power computed in steps 1 and 2 is too large, because it is based on the upper bound equation (32). The actual amplitude of the die temperature can now be computed by evaluating Eq. (32). The difference between the actual amplitude and the prescribed temperature tolerance is then added to the lowest frequency for which  $\Delta T_n \neq 0$ . This step has to be repeated until the difference is smaller than a desired accuracy  $\varepsilon$ .

Knowing the temperature tolerances for each frequency  $n$ , the required phase shifts  $\alpha_n$  and  $\beta_n$  as well as the control power densities,  $(Q_c)_n$ , can be computed from Eq. (22), Eq. (23) and Eq. (24), respectively. The control power profile can be evaluated from Eq. (31).

Comparison of the uncontrolled  $(\Delta T)_{max}$  for the highest frequency  $N$  in the truncated series to the overall tolerance gives an indication of whether the series has been truncated at too low a value of  $N$ . The sensitivity of the result to the chosen  $N$  may be checked by changing the value of  $N$ .

### 3.1 Example

A square wave die power profile and a triangular wave die power profile are used as dimensional examples for the control of a non-sinusoidal die power profile. The square wave profile can be written as

$$q_d(t) = \frac{4Q}{\pi} \sum_{n=1}^4 \frac{1}{2n-1} \cos\left((2n-1) \cdot \omega \cdot 2\pi \cdot t - \frac{\pi}{2}\right) \quad (36)$$

where  $Q$  is the amplitude of the square wave<sup>2</sup> and  $\omega$  its frequency in Hz. The die power profile is assumed to have an amplitude  $Q = 10 \text{ W/cm}^2$  with a frequency of  $\omega = 5 \text{ Hz}$ . Further properties are given in Table 1 and Table 2. Table 3 provides an overview over the results. The first two lines give the phase shifts  $\alpha_n$  and  $\beta_n$  and the third line the maximal temperature fluctuations for the uncontrolled case,  $(\Delta T_{max})_n$ . The next two lines are the temperature tolerances,  $\Delta T_n$ , before and after the optimization described previously. Note that the prescribed temperature tolerances for the first two frequencies equal the maximal temperature fluctuations for these frequencies. The temperature tolerance for the third frequency is changed during the optimization process to match the actual die temperature magnitude and the prescribed total temperature tolerance with an accuracy  $\varepsilon = 10^{-4} \text{ K}$ . The temperature tolerances,  $\Delta T_n$ , before the optimization sum up to the prescribed total temperature tolerance,  $\Delta T$ , according to Eq. (33) whereas the sum of the temperature tolerances,  $\Delta T_n$ , after the optimization is larger than  $\Delta T$ . The next line gives the control power densities,  $(Q_c)_n$ , after the optimization process. The control power densities for the first two frequencies are zero since these two frequencies are allowed to fluctuate uncontrolled ( $\Delta T_n = (\Delta T_{max})_n$ ). The last line shows the control power densities,  $(Q_{c0})_n$ , that are required to control the die temperature to be constant ( $T_{DIE} = 0$ ).

Figure 5 shows the temperature and power profiles for this example. The upper figure shows the convection-side and the back-face temperature profile of the IHS along with the die temperature profile. The lower figure shows the die power and the control power profile. The die power profile has the form of a square wave whereas the control power profile only consists of two frequencies as given in Table 3. The control power necessary to control a single frequency die power profile with the same power density and frequency is according to Fig. 3  $Q_c = 63.64 \text{ W/cm}^2$ . This control power is about a third of the power required to control a square wave die power profile. The reason for this large difference can be found in the relatively sharp edges in the square wave die power profile which drive the temperature faster than a sine wave does.

The second example is for a triangular wave die power profile of the form

$$q_d(t) = \frac{8Q}{\pi^2} \sum_{n=1}^4 \frac{1}{(2n-1)^2} \cos\left((2n-1) \cdot \omega \cdot 2\pi \cdot t + (-1)^n \frac{\pi}{2}\right) \quad (37)$$

The die power density is again set to  $Q_d = 10 \text{ W/cm}^2$  and the frequency to  $\omega = 5 \text{ Hz}$ . The results for this example are summarized in Table 4. Only the temperature tolerance for lowest frequency  $\Delta T_4$  is not equal to its maximal (uncontrolled) temperature fluctuation,  $(\Delta T_{max})_1$ , and is changed during the optimization process. The phase shifts  $\alpha_n$  and  $\beta_n$  are the same as for the square wave die power profile since they are only dependent on the frequencies  $\omega_n$ . Figure 6 shows the temperature and power profiles for this example. The required control power of  $Q_c = 53.63 \text{ W/cm}^2$  is even smaller than for a single frequency die power profile.

---

<sup>2</sup>Half the peak-to-peak amplitude.

## **SUMMARY**

The temperature control in a distributed-parameter thermal system presented in [4] has been extended to non-sinusoidal input power profiles. A new method for determining the optimal control power has been developed for a single frequency power input and was extended to find the optimal control power profile for non-sinusoidal input power profiles. It is shown that control tolerances should be assigned to the highest frequencies first, so as to limit the total power required. The control power scheme developed in this paper could help to reduce optical laser power and therefore costs for the proposed control method.

## **ACKNOWLEDGMENT**

CCR would like to thank the German Academic Exchange Service and the German National Academic Foundation for financial support of this work. JHL gratefully acknowledges partial support from Teradyne, Inc.

## NOMENCLATURE

### Roman Symbols

$A, B, P, R, U, V$  Mathematical constants, see Appendix A.

$a_t$  Thermal diffusivity [ $\text{m}^2/\text{s}$ ].

$Bi_{IHS}$  Biot number for top side of IHS  $h_c b/k$ .

$b$  IHS thickness [m].

$C_1, C_2$  Mathematical constants, Eq. (10) and Eq. (11).

$C_1^*, C_2^*$  Mathematical constants, Eq. (21).

$c_1, c_2$  Mathematical constants, Eq. (3).

$c_p$  Specific heat capacity at constant pressure [ $\text{J}/\text{kg}\cdot\text{K}$ ].

$h_c$  Average convective transfer coefficient [ $\text{W}/\text{m}^2\cdot\text{K}$ ].

$i$  The imaginary number  $\sqrt{-1}$ .

$k$  Thermal conductivity [ $\text{W}/\text{m}\cdot\text{K}$ ].

$L$  Unsteady diffusion scale in IHS  $\sqrt{\omega/2a_t}$ , [1/m].

$m$  Die mass per unit area [ $\text{kg}/\text{m}^2$ ].

$n$  Index for non-sinusoidal die power profiles.

$Q_{BF}$  Power density of heat flux from die into IHS, Eq. (17) [ $\text{W}/\text{m}^2$ ].

$Q_c$  Control power density [ $\text{W}/\text{m}^2$ ].

$Q_{c0}$  Constant part of control power for optimal control case, Eq. (27) [ $\text{W}/\text{m}^2$ ].

$Q_{c1}$  Linear coefficient of control power for optimal control case, Eq. (28) [ $\text{W}/\text{m}^2\cdot\text{K}$ ].

$Q_d$  Die power density [ $\text{W}/\text{m}^2$ ].

$q_{BF}(t)$  Heat flux from die into IHS, Eq. (16) [ $\text{W}/\text{m}^2$ ].

$q_c(t)$  Control power flux, Eq. (5) and Eq. (31) [ $\text{W}/\text{m}^2$ ].

$q_d(t)$  Die power flux, Eq. (4) and Eq. (30) [ $\text{W}/\text{m}^2$ ].

$R_t$  Thermal contact resistance [ $\text{K}\cdot\text{m}^2/\text{W}$ ].

$T_{BF}(t)$  Back-face IHS temperature, Eq. (6) [K].

$T_{DIE}(t)$  Die temperature [K].

$\Delta T$  Prescribed temperature tolerance [K].

$\Delta T_{max}$  Maximal temperature fluctuation for uncontrolled case, Eq. (25) [K].

$t$  Time [s].

$W(x, t)$  Complex temperature solution, Eq. (1).

$X(x)$  Real part of complex temperature solution [K].

$x$  Distance from convection-side of IHS [m].

#### *Greek Symbols*

$\alpha, \beta, \gamma, \varphi$  Phase shifts [rad].

$\lambda$  Lumped frequency response of die  $1/mc_p R_t$  [1/s].

$\omega$  Frequency of die power variation [rad/s].

## REFERENCES

- [1] Pfahnl, A. C., Lienhard V, J. H., and Slocum, A. H., 1999. "Thermal Management and Control in Testing Packaged Integrated Circuit (IC) Devices". Proc. 34th Intersociety Energy Conversion Conf. Paper No. 1999-01-2723.
- [2] Sweetland, M., Lienhard V, J., and Slocum, A. H., 2005. "A Convection/Radiation Temperature Control System for High Power Density Electronic Device Testing". *under review* .
- [3] Sweetland, M., 2001. *Design of Thermal Control Systems for Testing of Electronics*. PhD Thesis, Massachusetts Institute of Technology, Cambridge, MA, June.
- [4] Sweetland, M., and Lienhard V, J. H., 2003. "Active Thermal Control of Distributed Parameter Systems with Application to Testing of Packaged (IC) Devices". *ASME Journal of Heat Transfer*, **125** February , pp. 165–174.
- [5] Richter, C. C., 2004. Active Thermal Control of Distributed Parameter Systems Excited at Multiple Frequencies. Diplomarbeit, Massachusetts Institute of Technology, Cambridge, MA, August.
- [6] Baehr, H. D., and Stephan, K., 2004. *Wärme und Stoffübertragung*. Springer, Berlin.

## Appendix A: Mathematical Constants

The following mathematical constants are taken from [4].

$$A = \frac{Bi_{IHS}}{bL} \cos(bL) (e^{2bL} + 1) - [\cos(bL) + \sin(bL)] + e^{2bL} [\cos(bL) - \sin(bL)]$$

$$B = \frac{Bi_{IHS}}{bL} \sin(bL) (e^{2bL} - 1) - [\cos(bL) - \sin(bL)] + e^{2bL} [\cos(bL) + \sin(bL)]$$

$$P = e^{bL} [\cos(bL) - \sin(bL)] - \frac{e^{-bL}}{D} [G \cos(bL) + N \sin(bL)]$$

$$R = e^{bL} [\sin(bL) + \cos(bL)] + \frac{e^{-bL}}{D} [G \sin(bL) - N \cos(bL)]$$

$$U = \frac{P \cdot E + R \cdot F}{D}$$

$$V = \frac{P \cdot F - E \cdot R}{D}$$

where

$$D = h_c^2 + 2h_c kL + 2(kL)^2,$$

$$E = 2(kL)^2 - h_c^2,$$

and  $F = 2h_c kL$ .

**List of Tables**

|   |   |    |
|---|---|----|
| 1 | Material properties for examples. . . . .   | 16 |
| 2 | Problem properties and geometry for examples. . . . .   | 16 |
| 3 | Results for square wave die power profile with a prescribed temperature tolerance $\Delta T = 2$ K. . . . .     | 16 |
| 4 | Results for triangular wave die power profile with a prescribed temperature tolerance $\Delta T = 2$ K. . . . . | 17 |

Table 1. Material properties for examples.

| Material      | Density                | Specific Heat | Thermal Conductivity |
|---------------|------------------------|---------------|----------------------|
| Copper (IHS)  | 8950 kg/m <sup>3</sup> | 385 J/kg·K    | 386 W/m·K            |
| Silicon (Die) | 2330 kg/m <sup>3</sup> | 699 J/kg·K    | 148 W/m·K            |

Table 2. Problem properties and geometry for examples.

| Problem Properties                |           |                           | Geometry      |           |        |
|-----------------------------------|-----------|---------------------------|---------------|-----------|--------|
| Average heat transfer coefficient | $h_c$     | 1200 W/m <sup>2</sup>     | IHS thickness | $b$       | 1.8 mm |
| Thermal contact resistance        | $R_t$     | 0.42 K·cm <sup>2</sup> /W | Die thickness | $b_{DIE}$ | 0.2 mm |
| Air temperature                   | $T_{air}$ | 0 K                       |               |           |        |

Table 3. Results for square wave die power profile with a prescribed temperature tolerance  $\Delta T = 2$  K.

|   | $n$                  | 1                        | 2                        | 3                        | 4                        | peak-to-peak<br>amplitude |
|---|----------------------|--------------------------|--------------------------|--------------------------|--------------------------|---------------------------|
| Frequency   | $\omega_n$           | 5 Hz                     | 15 Hz                    | 25 Hz                    | 35 Hz                    |                           |
| Control power phase shift                         | $\alpha_n$           | 271.45°                  | 292.90°                  | 309.72°                  | 324.84°                  |                           |
| Die temperature phase shift                       | $\beta_n$            | 330.21°                  | 305.86°                  | 293.91°                  | 287.72°                  |                           |
| Maximal temperature fluctuation                   | $(\Delta T_{max})_n$ | 9.77 K                   | 2.17 K                   | 0.90 K                   | 0.48 K                   | 9.62 K                    |
| Prescribed temperature tolerance                  | $\Delta T_n$         |                          |                          |                          |                          |                           |
| <i>before optimization</i>                        |                      | 0 K                      | 0.62 K                   | 0.90 K                   | 0.48 K                   | 1.94 K                    |
| <i>after optimization</i>                         |                      | 0 K                      | 0.69 K                   | 0.90 K                   | 0.48 K                   | 2.00 K                    |
| Control power density                             | $(Q_c)_n$            | 109.59 W/cm <sup>2</sup> | 76.76 W/cm <sup>2</sup>  | 0 W/cm <sup>2</sup>      | 0 W/cm <sup>2</sup>      | 371.60 W/cm <sup>2</sup>  |
| <i>for control to <math>\Delta T = 0</math> K</i> | $(Q_{c0})_n$         | 109.59 W/cm <sup>2</sup> | 112.60 W/cm <sup>2</sup> | 119.79 W/cm <sup>2</sup> | 130.14 W/cm <sup>2</sup> |                           |



Table 4. Results for triangular wave die power profile with a prescribed temperature tolerance  $\Delta T = 2$  K.

|   | $n$                  | 1                       | 2                       | 3                       | 4                       | peak-to-peak<br>amplitude |
|---|----------------------|-------------------------|-------------------------|-------------------------|-------------------------|---------------------------|
| Frequency   | $\omega_n$           | 5 Hz                    | 15 Hz                   | 25 Hz                   | 35 Hz                   |                           |
| Control power phase shift                         | $\alpha_n$           | 271.45°                 | 292.90°                 | 309.72°                 | 324.84°                 |                           |
| Die temperature phase shift                       | $\beta_n$            | 330.21°                 | 305.86°                 | 293.91°                 | 287.72°                 |                           |
| Maximal temperature fluctuation                   | $(\Delta T_{max})_n$ | 6.22 K                  | 0.46 K                  | 0.11 K                  | 0.04 K                  | 6.70 K                    |
| Prescribed temperature tolerance                  | $\Delta T_n$         |                         |                         |                         |                         |                           |
| <i>before optimization</i>                        |                      | 1.38 K                  | 0.46 K                  | 0.11 K                  | 0.04 K                  | 1.95 K                    |
| <i>after optimization</i>                         |                      | 1.44 K                  | 0.46 K                  | 0.11 K                  | 0.04 K                  | 2.00 K                    |
| Control power density                             | $(Q_c)_n$            | 53.63 W/cm <sup>2</sup> | 0 W/cm <sup>2</sup>     | 0 W/cm <sup>2</sup>     | 0 W/cm <sup>2</sup>     | 107.26 W/cm <sup>2</sup>  |
| <i>for control to <math>\Delta T = 0</math> K</i> | $(Q_{c0})_n$         | 69.77 W/cm <sup>2</sup> | 23.89 W/cm <sup>2</sup> | 15.25 W/cm <sup>2</sup> | 11.84 W/cm <sup>2</sup> |                           |

## List of Figures

|   |  |    |
|---|--|----|
| 1 | Typical cross-section of a high-power microprocessor device. . . . .   | 19 |
| 2 | Schematic diagram of simplified device for transient analysis. . . . .   | 20 |
| 3 | Control power densities and phase shifts for single frequency die power profile ( $\omega = 5$ Hz and $Q_c = 10$ W/cm <sup>2</sup> ) and multiple prescribed temperature tolerances $\Delta T$ . The problem properties are given in Table 1 and Table 2. The circles $\circ$ mark the points computed using the method given in Ref. [4]. . . . . | 21 |
| 4 | Control power density for optimal control of a single frequency die power profile with $Q_d = 10$ W/cm <sup>2</sup> and frequencies from zero to 50 HZ. . . . .  | 22 |
| 5 | Temperature and power profiles for square wave die power profile and a prescribed temperature tolerance of $\Delta T = 2$ K. Properties are given in Table 1 and Table 2. . . . .  | 23 |
| 6 | Temperature and power profiles for triangular wave die power profile and a prescribed temperature tolerance of $\Delta T = 2$ K. Properties are given in Table 1 and Table 2. . . . .  | 24 |

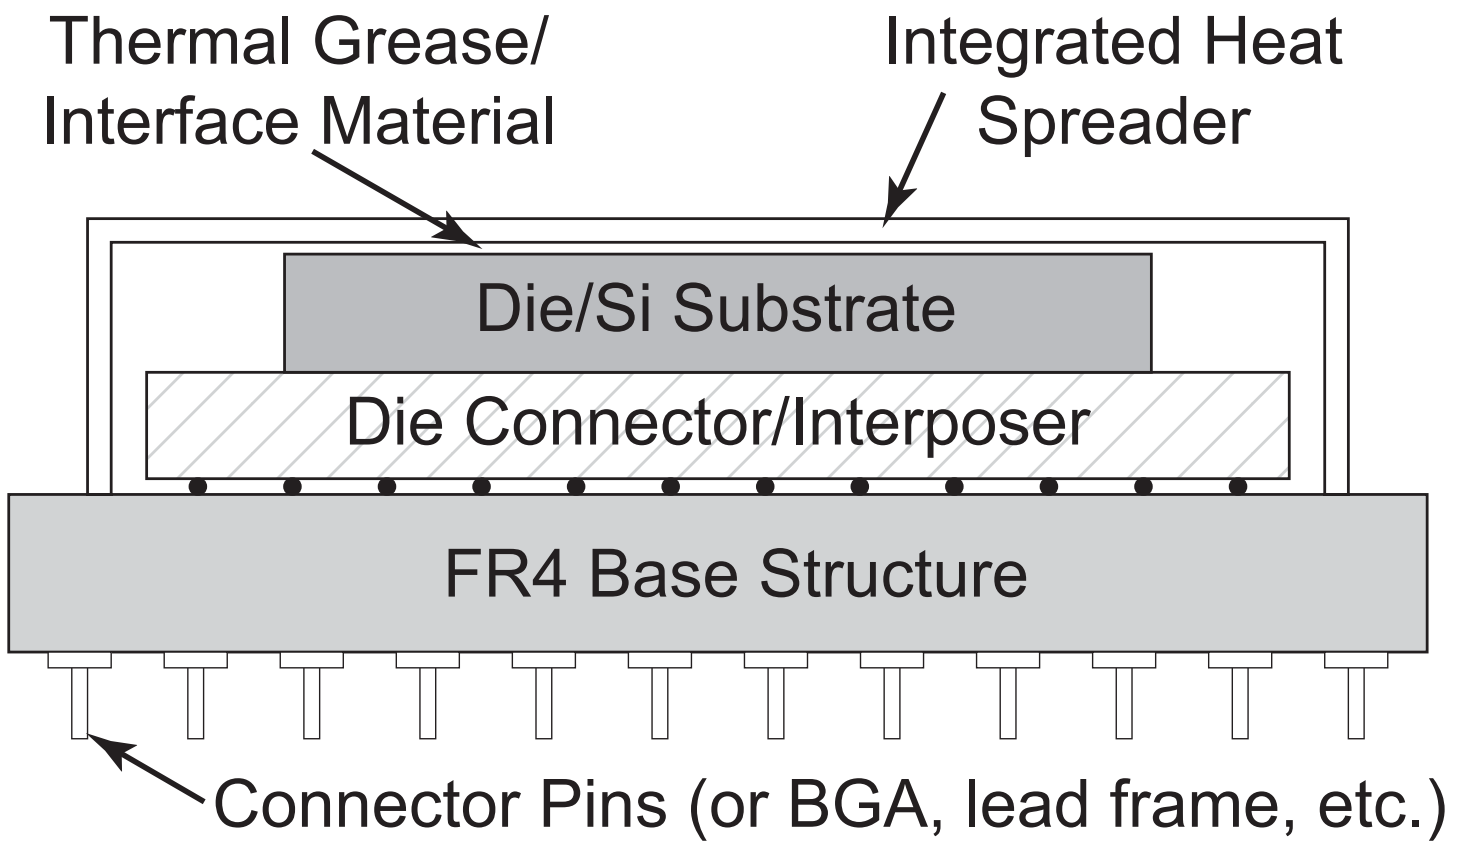


Figure 1. Typical cross-section of a high-power microprocessor device.

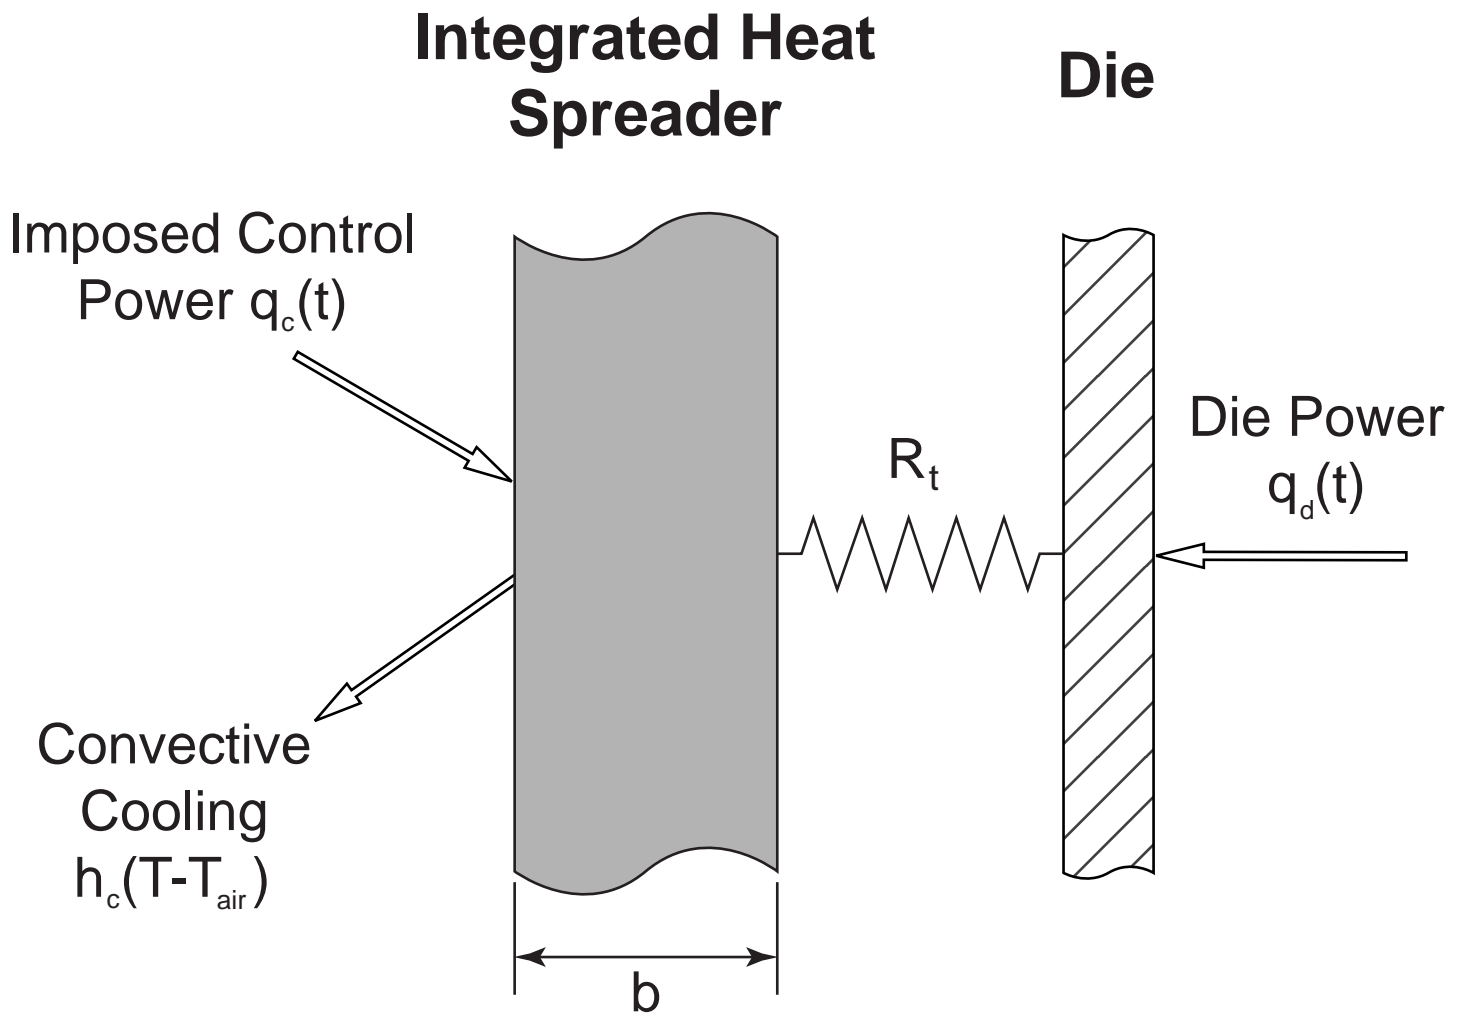


Figure 2. Schematic diagram of simplified device for transient analysis.

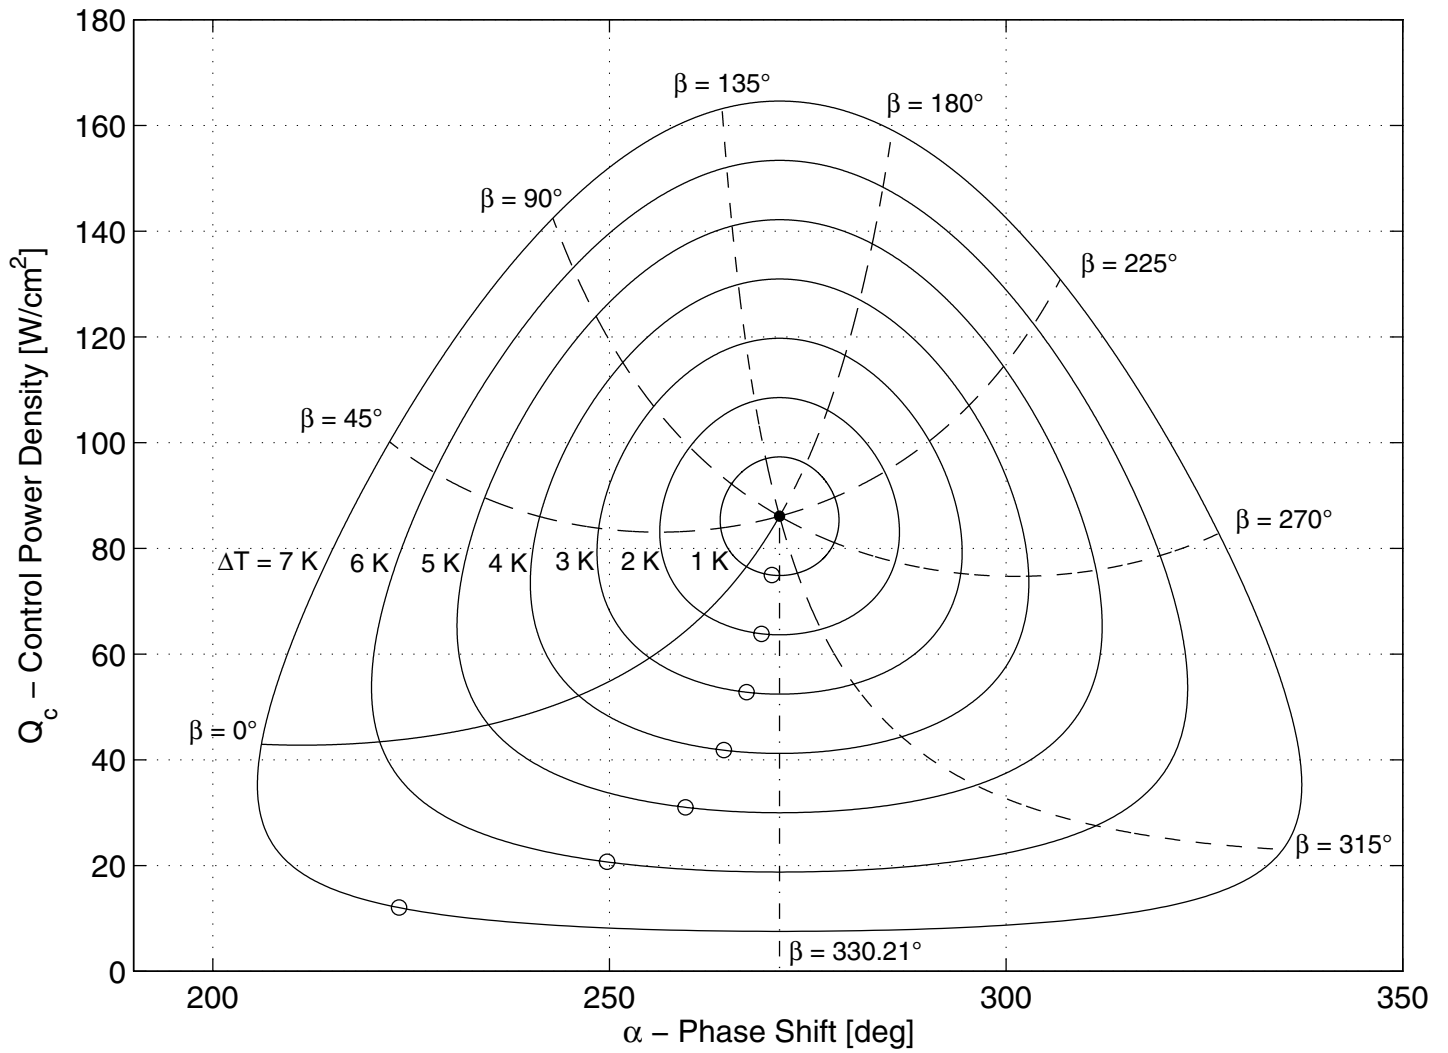


Figure 3. Control power densities and phase shifts for single frequency die power profile ( $\omega = 5$  Hz and  $Q_c = 10$  W/cm<sup>2</sup>) and multiple prescribed temperature tolerances  $\Delta T$ . The problem properties are given in Table 1 and Table 2. The circles  $\circ$  mark the points computed using the method given in Ref. [4].

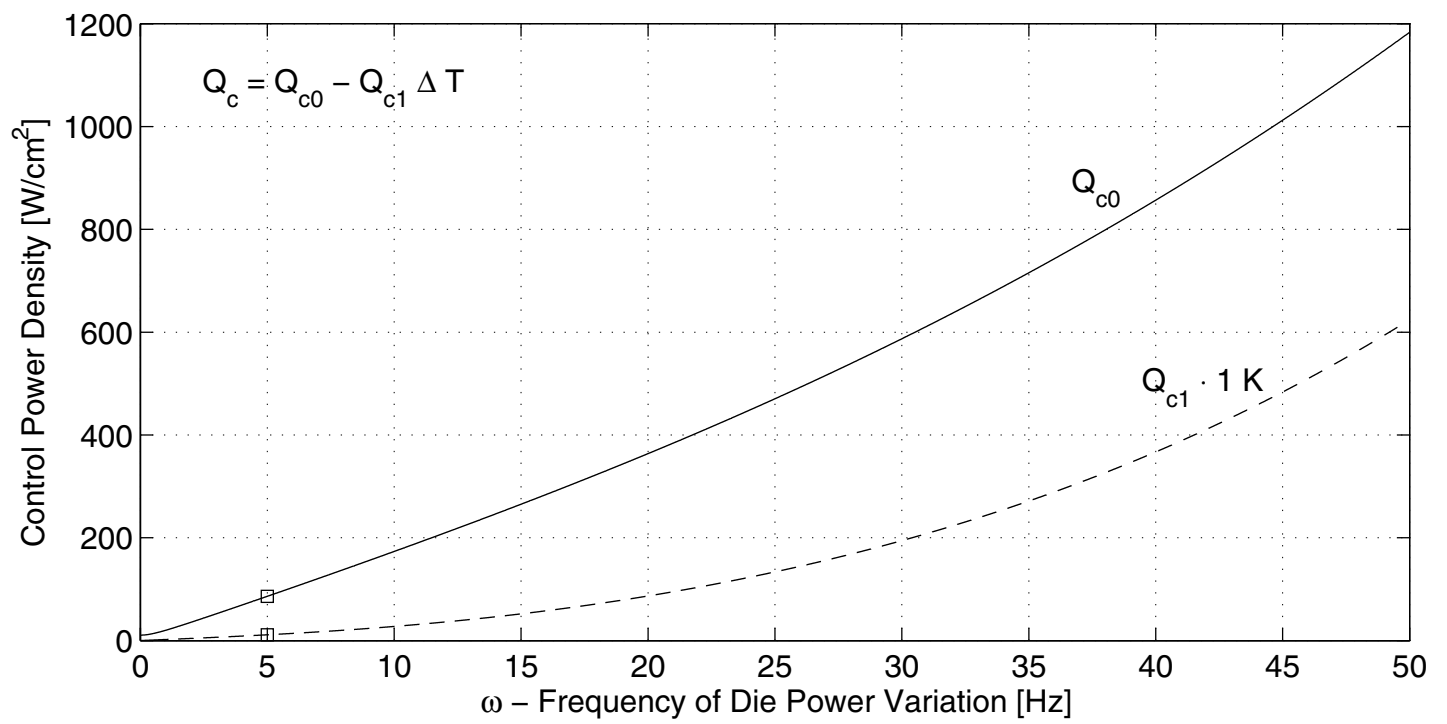


Figure 4. Control power density for optimal control of a single frequency die power profile with  $Q_d = 10 \text{ W/cm}^2$  and frequencies from zero to 50 HZ.

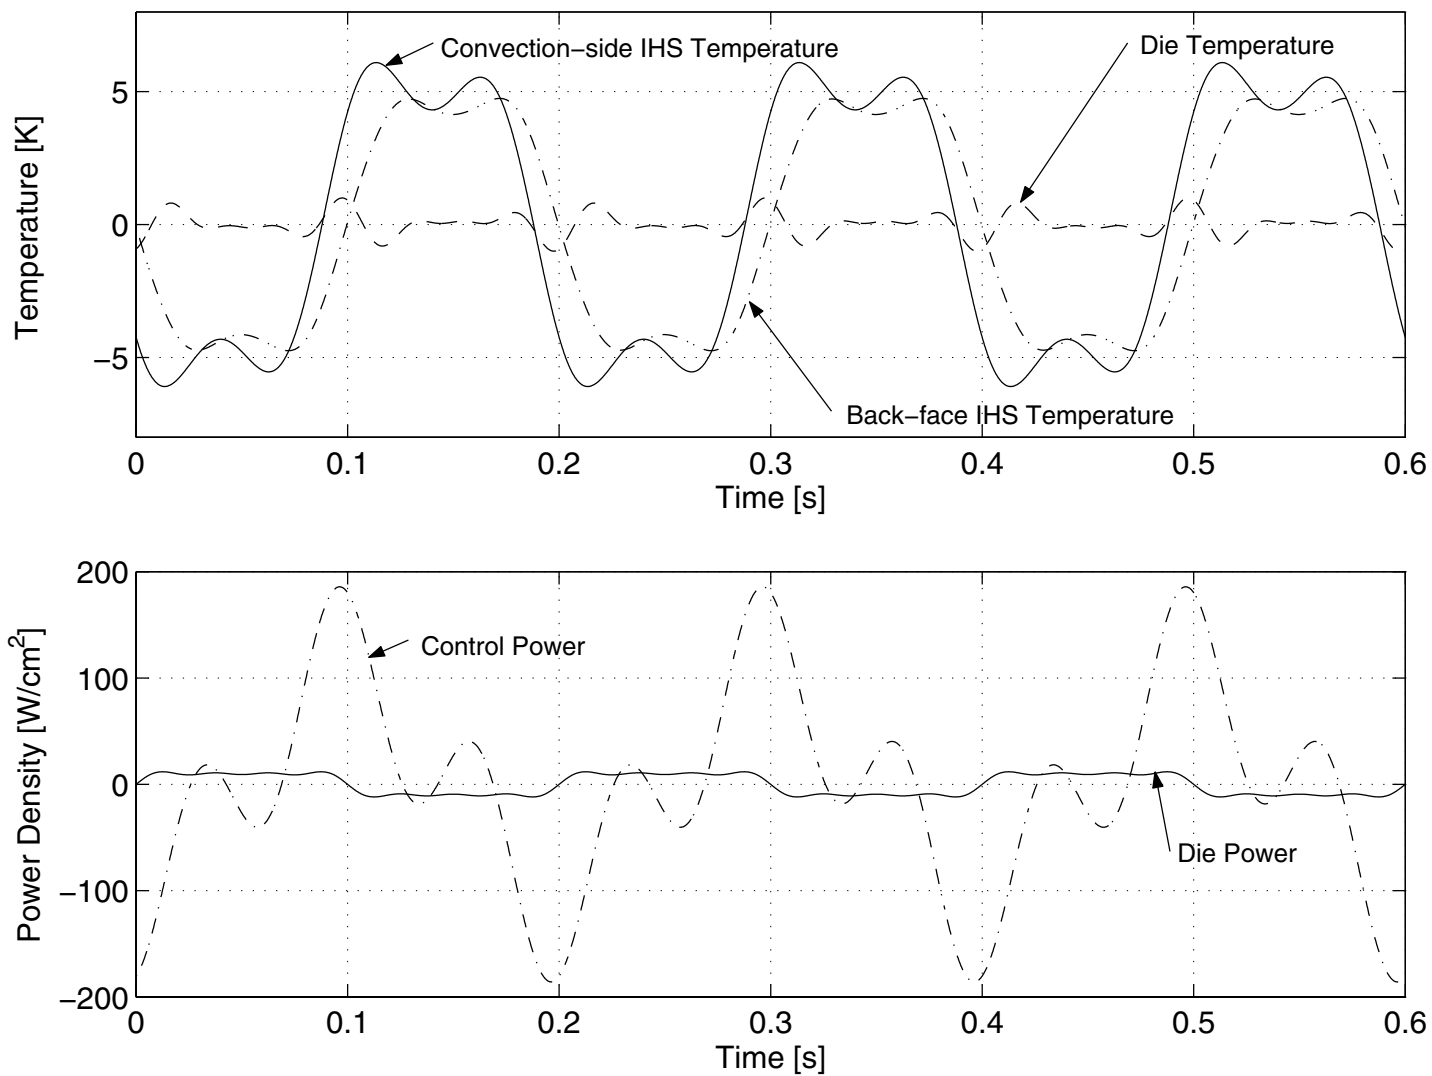


Figure 5. Temperature and power profiles for square wave die power profile and a prescribed temperature tolerance of  $\Delta T = 2$  K. Properties are given in Table 1 and Table 2.

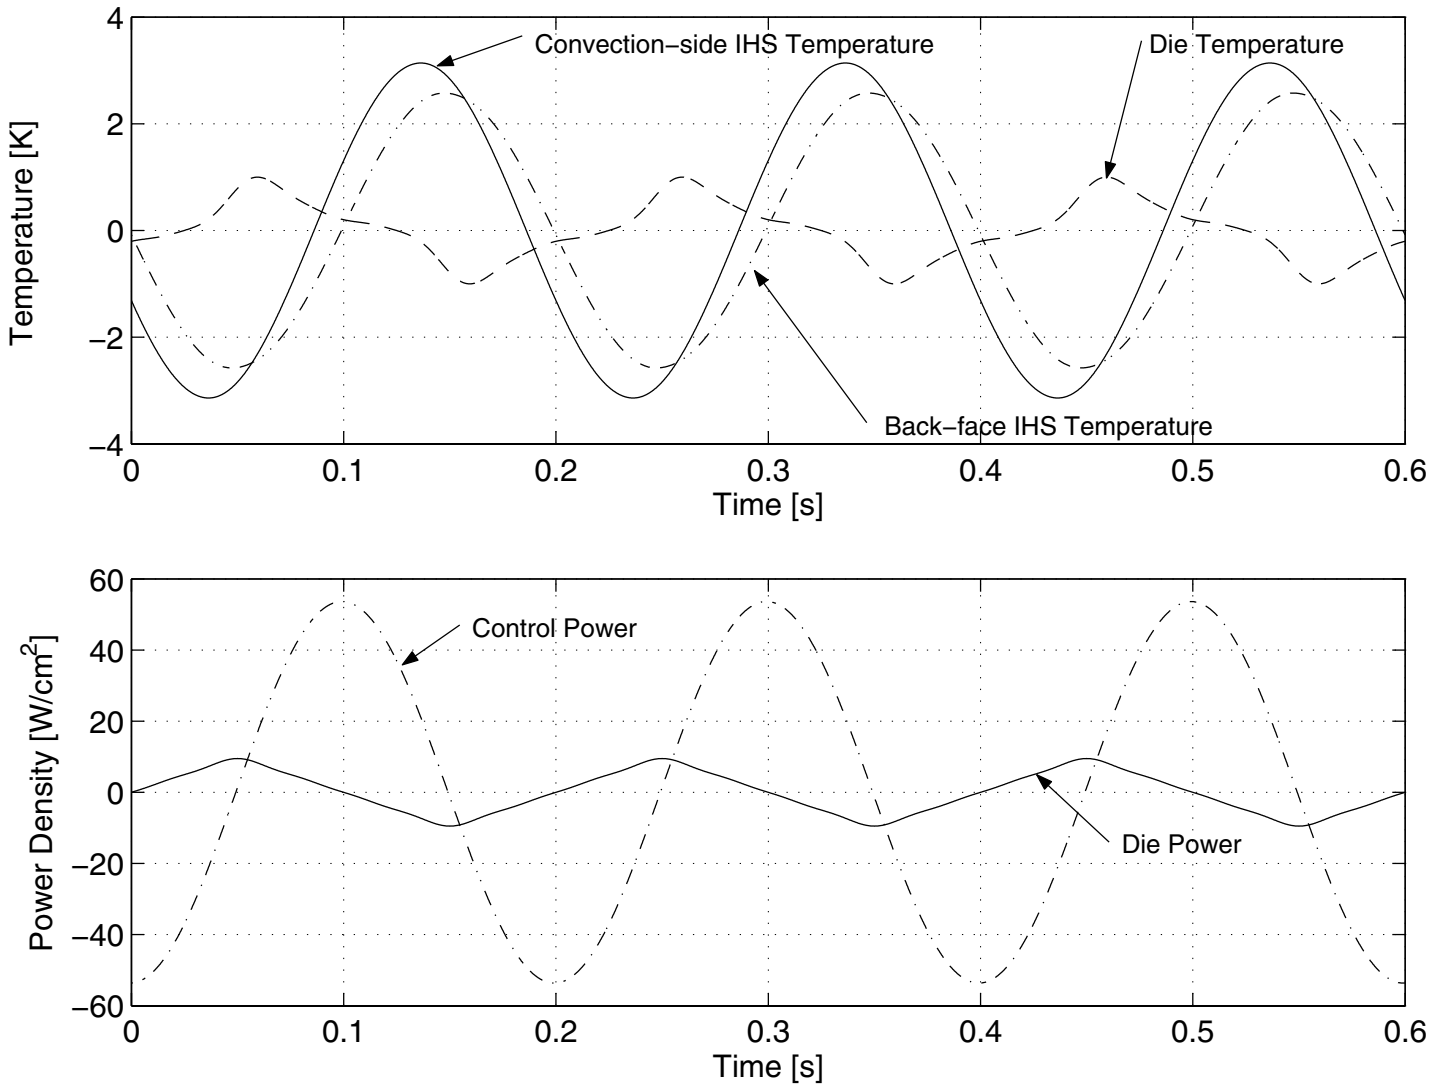


Figure 6. Temperature and power profiles for triangular wave die power profile and a prescribed temperature tolerance of  $\Delta T = 2$  K. Properties are given in Table 1 and Table 2.