

Product Engineering Processes

Battery Primer

A short battery primer

Handbook of batteries, Linden and Reddy

Short Primer on Batteries

Types

Primary (dry cell): non rechargeable

low power applications

infrequent use

Secondary: rechargeable

high discharge rates

frequent use

Short Primer on Batteries

Selection considerations

Physical characteristics: size, shape weight

Voltage: nominal, maximum, minimum, discharge profile

Load current: rate, constant power, constant resistance, pulsed

Duty cycle: continuous, intermittent, cyclic

Charge/discharge cycle: cycling (float), deep cycle, efficiency of charging

Temperature range: maximum, minimum and nominal

Service life: required operation time

Safety: failure rates, leakage, off-gassing, toxicity, disposal


Environment: vibration, acceleration, orientation

Maintenance: regular upkeep, replacement

Cost: initial, life-cycle cost


Short Primer on Batteries

Cell voltage

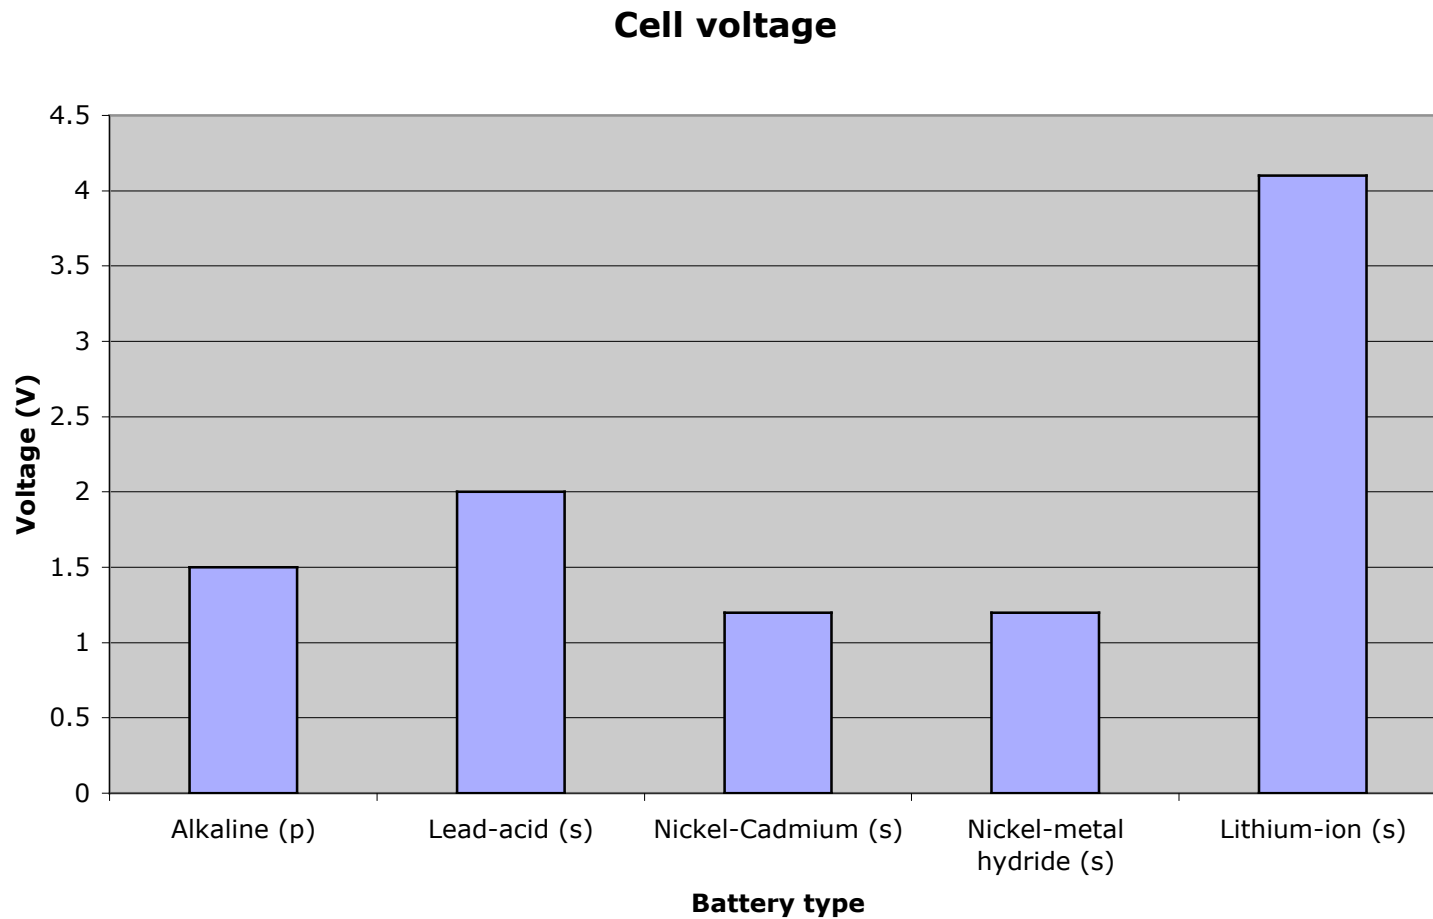


Short Primer on Batteries

Specific energy

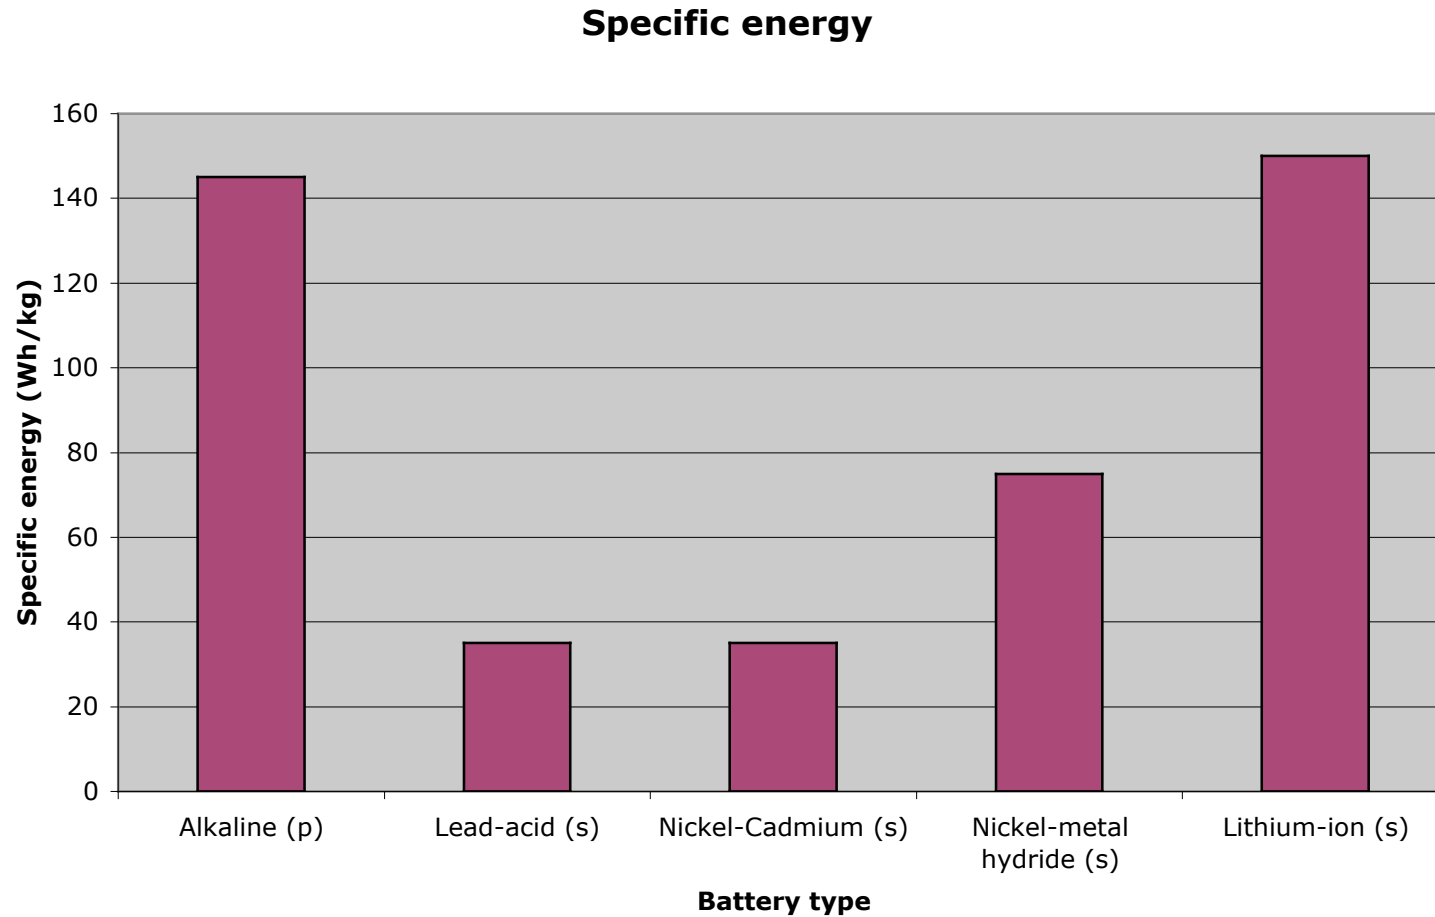


Short Primer on Batteries

Energy density

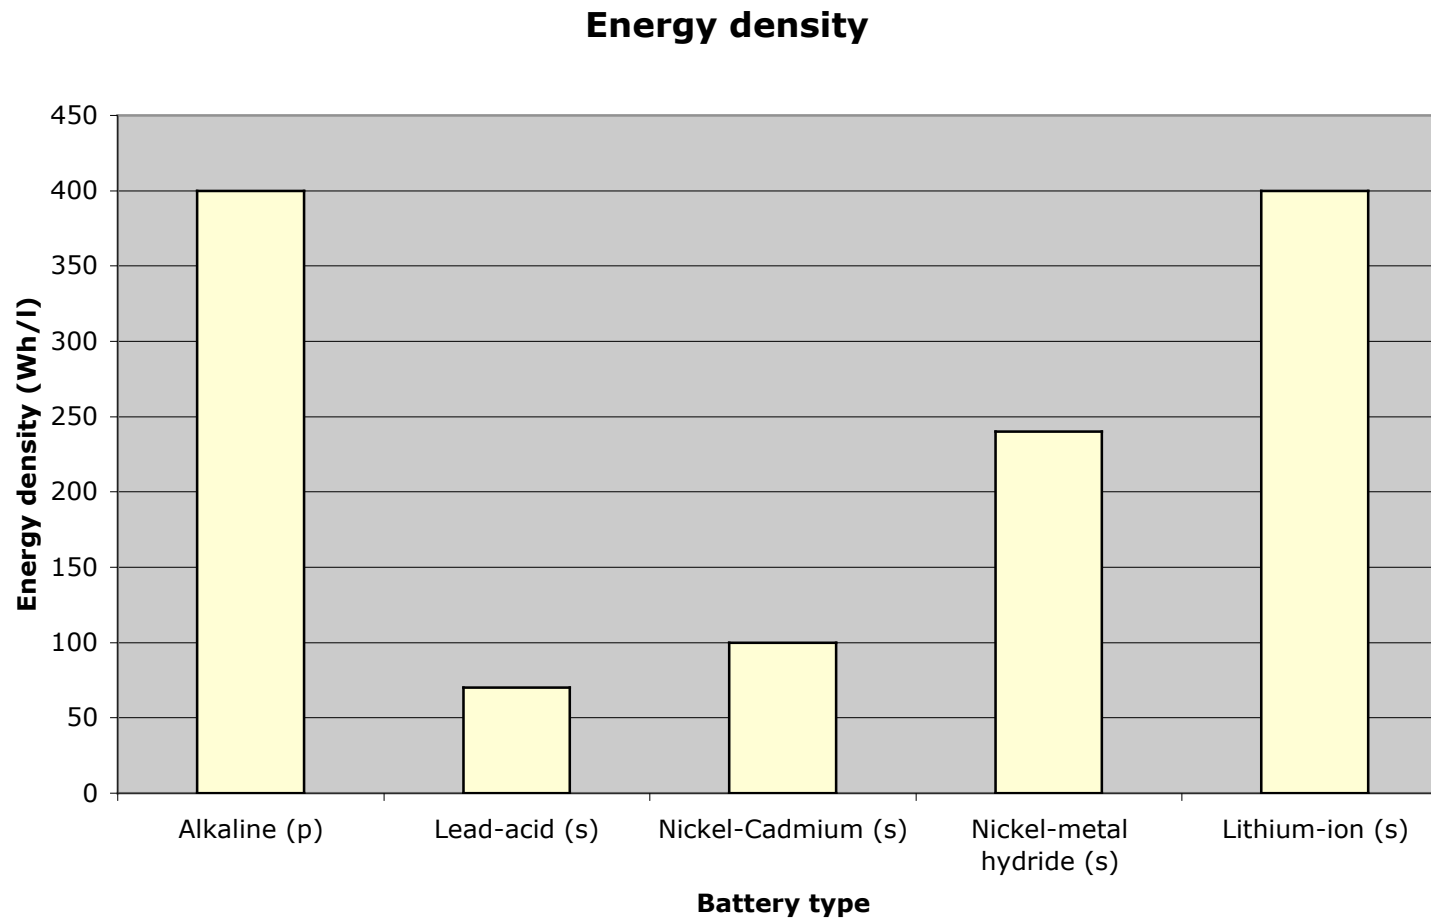


Short Primer on Batteries

Self discharge

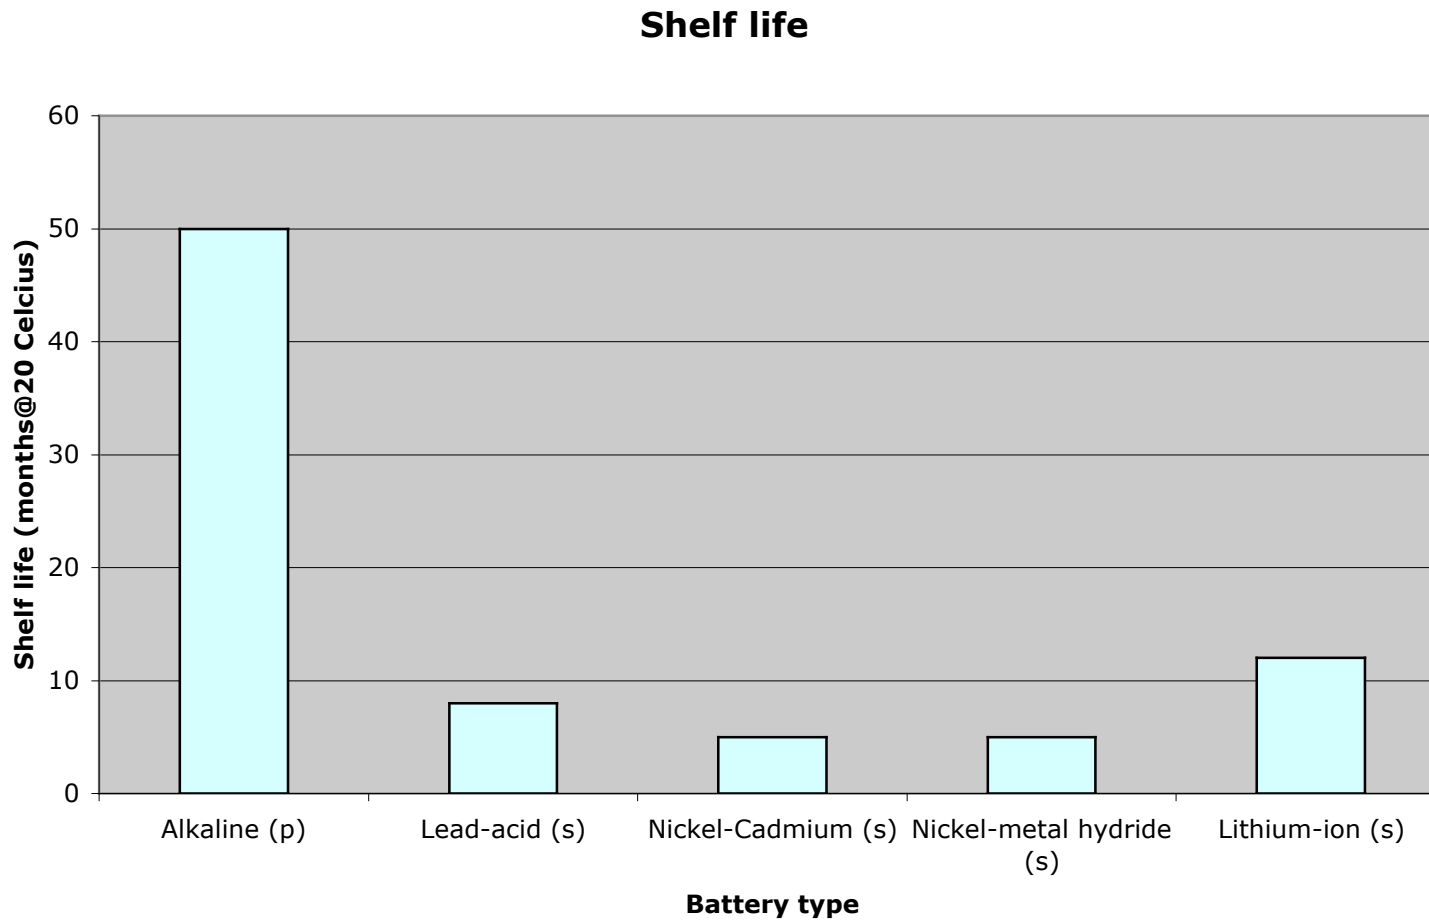


Short Primer on Batteries

Estimated cycle life

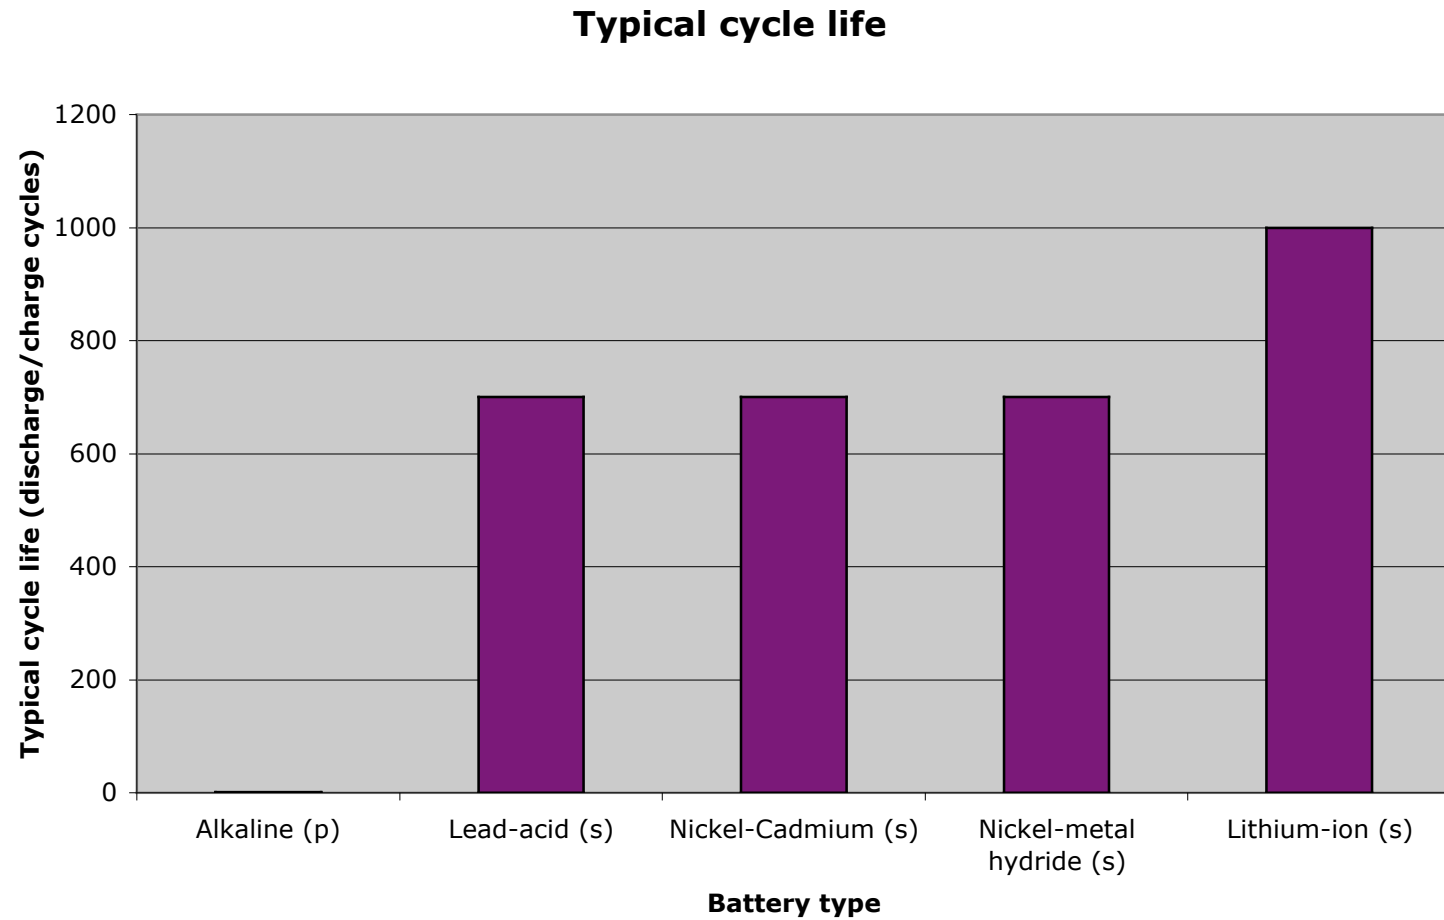


Short Primer on Batteries

Temperature range

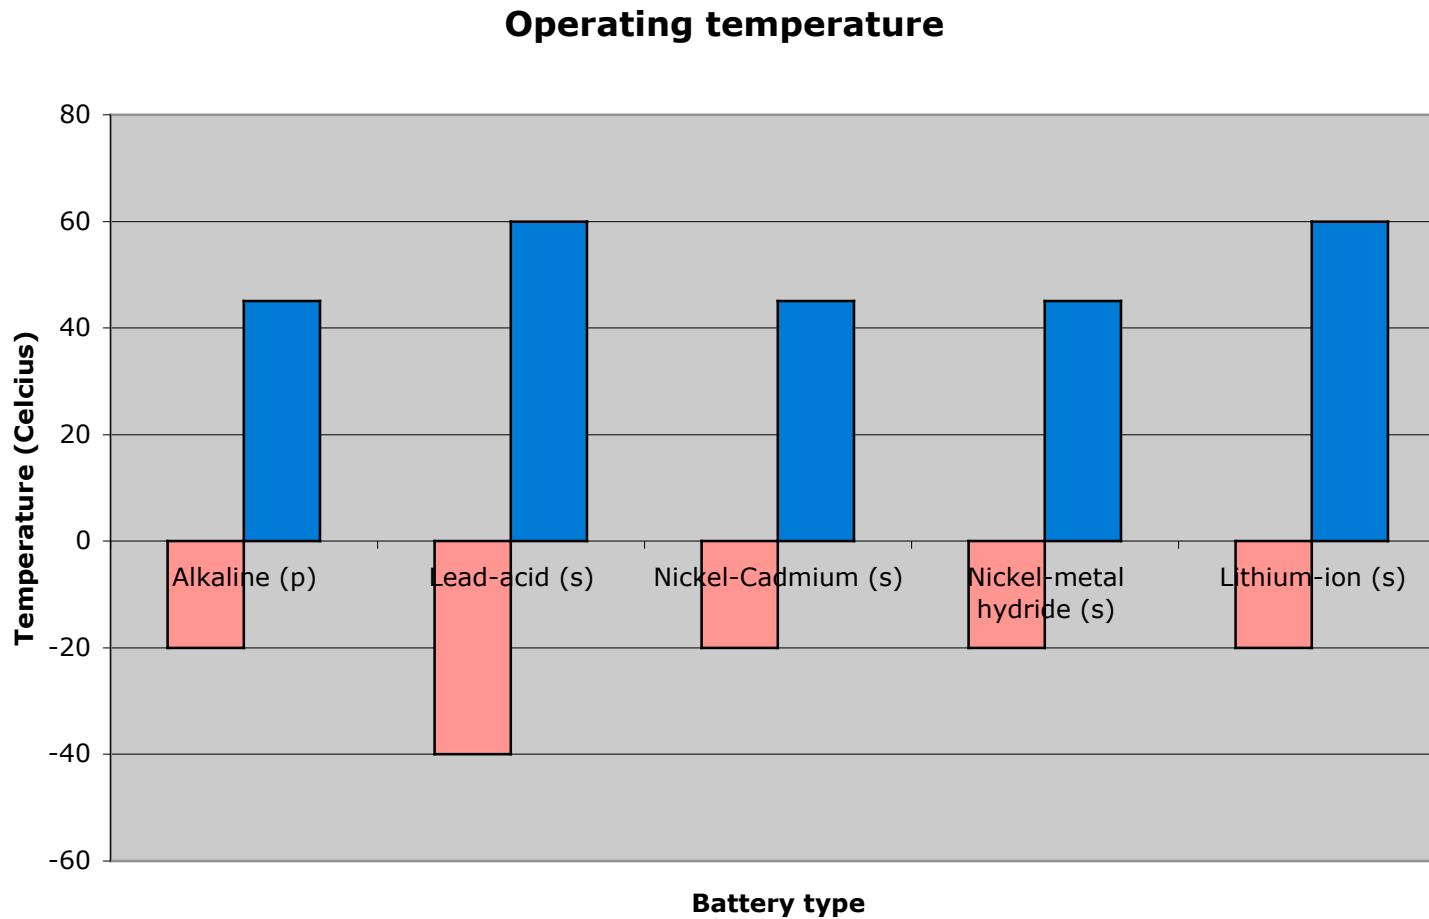


Short Primer on Batteries

Relative cost

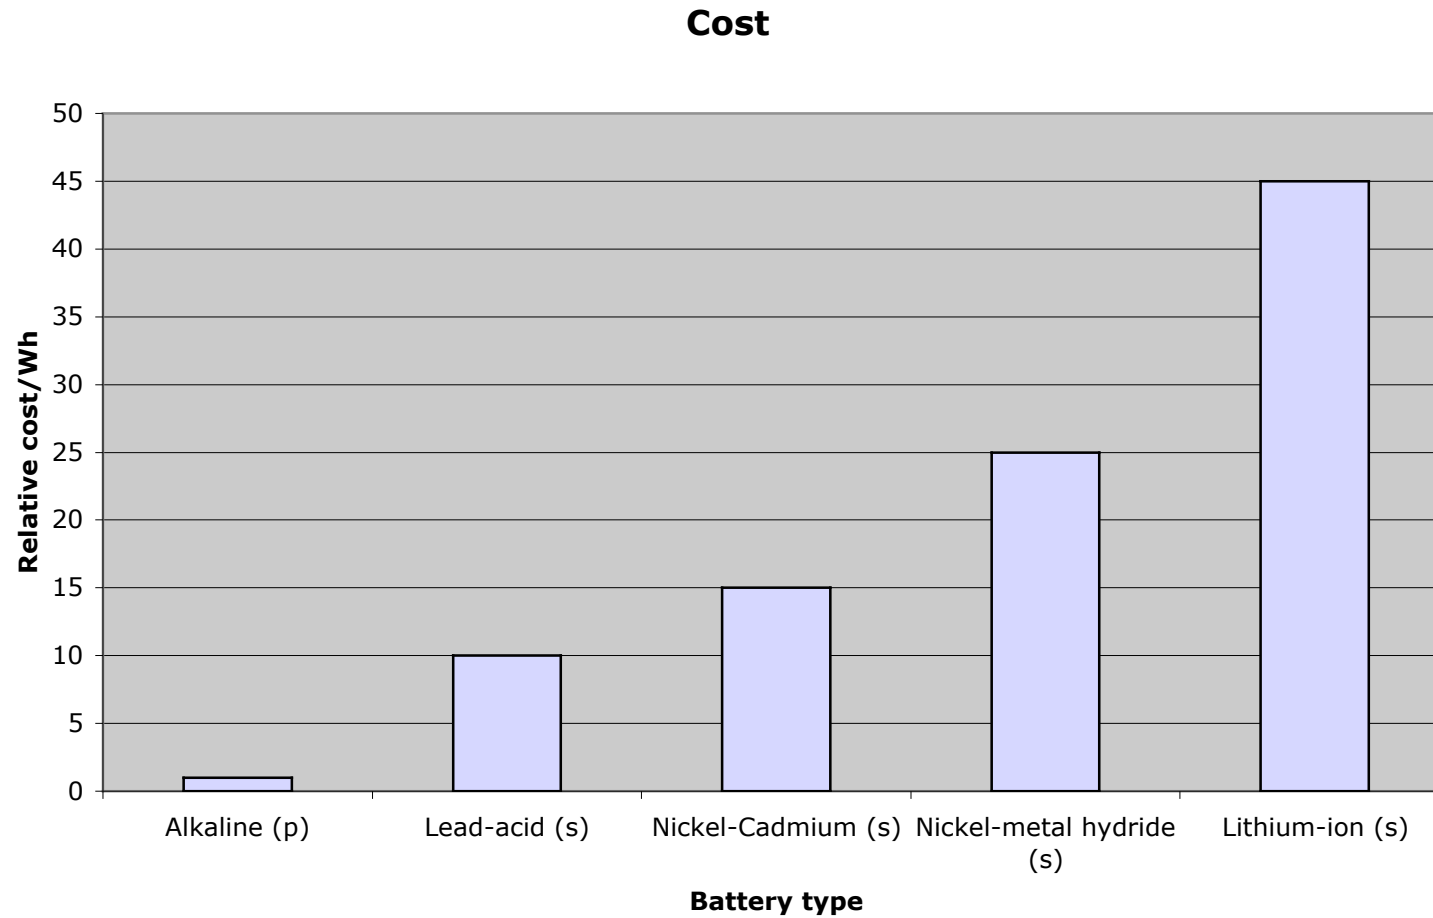


Short Primer on Batteries

Voltage and state-of-charge

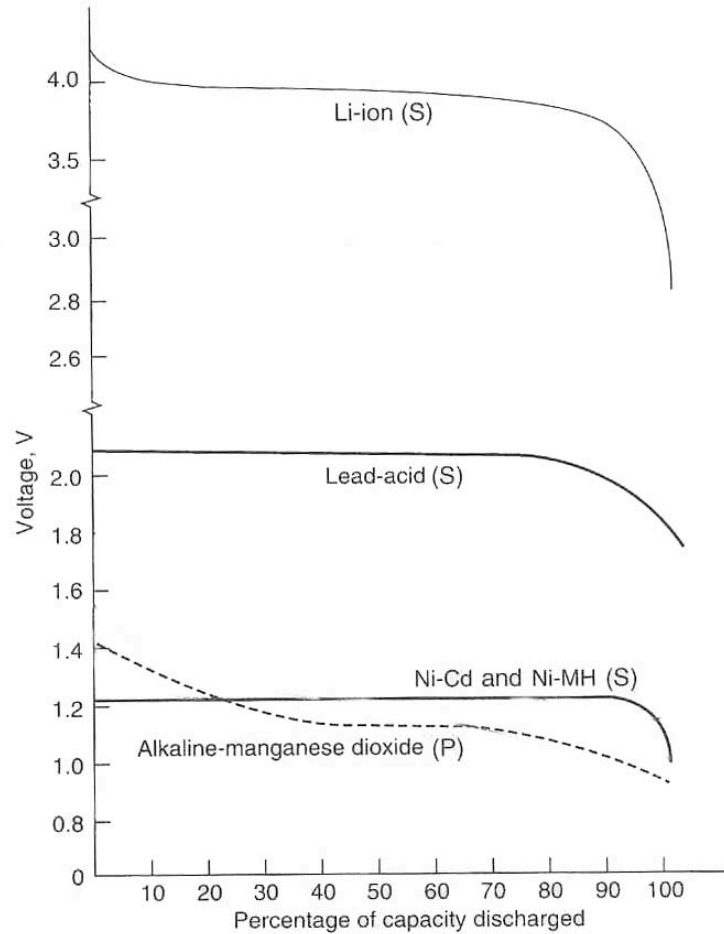


Short Primer on Batteries

Temperature and energy density

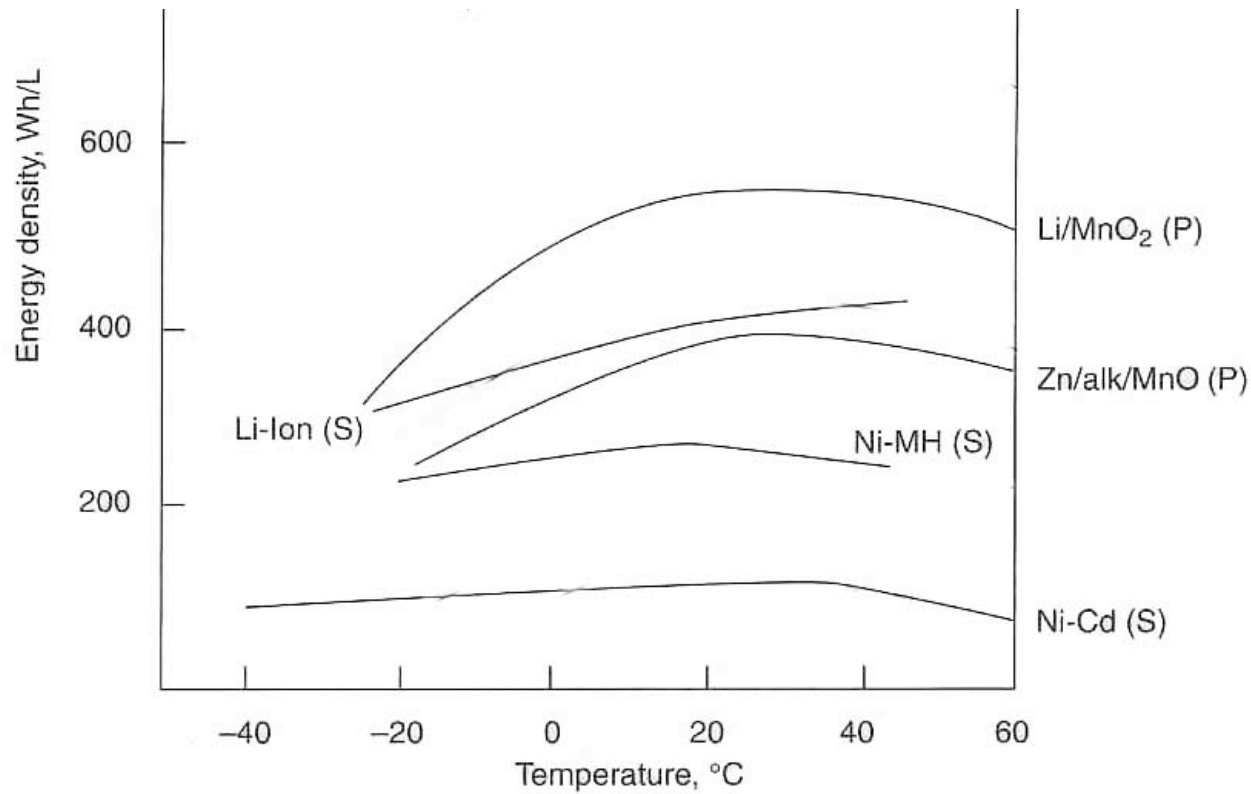


Short Primer on Batteries

Temperature and shelf life

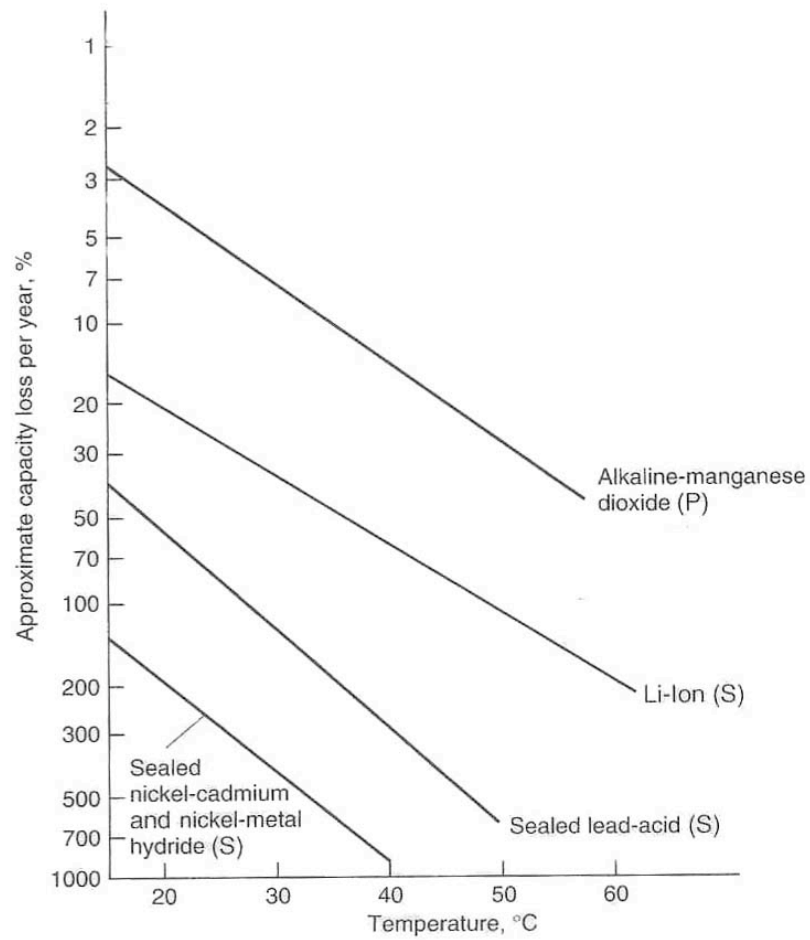

Short Primer on Batteries

Power and discharge rate

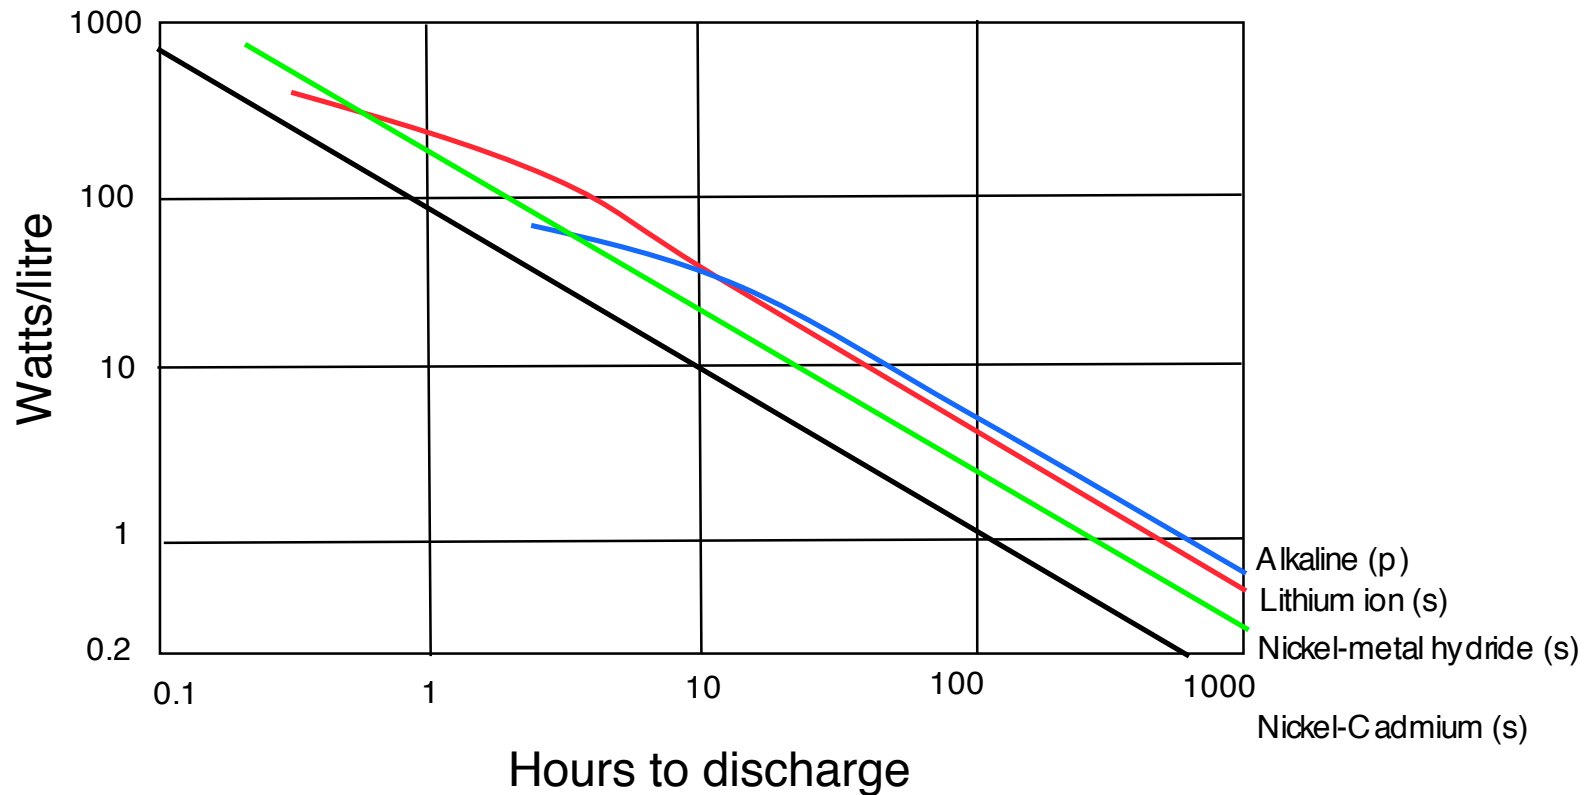


Short Primer on Batteries

Secondary battery comparison

	advantages	disadvantages	Cycle life	Life (years)
Lead-acid SLI (starting, lighting, ignition)	low cost, high availability, high current, low temperature, good float service, maintenance free	low cycle life, shallow discharge cycles, low energy density, poor charge retention, <u>hydrogen evolution</u>	200-700	4
Lead-acid traction	lowest cost of deep cycle systems	low energy density, less rugged, hydrogen <u>evolution</u>	1500	6
Lead-acid stationary	designed specifically for <u>float charging cycles</u>	hydrogen evolution		25
Lead-acid portable	maintenance free, long flat service life, low and high temperature, operates in <u>any position</u>	Cannot be stored discharged, lower cycle life, difficult for small <u>batteries</u>	250	8
Nickel-Cadmium (sealed)	rugged, excellent storage, high current, low temperature, operates in <u>any position</u>	high cost, memory effect, poor for float service	500	5
Nickel-metal hydride	rugged, high energy density, high current, operates in any position, <u>good cycle life</u>	high cost (between Nickel-Cadmium and Lithium ion)	600	5
Lithium ion	rugged, high energy density, high specific energy, operates in any position, good cycle life, low self discharge	lower current, very high cost	1000+	

Short Primer on Batteries

Cycle life and discharge depth (lead-acid)

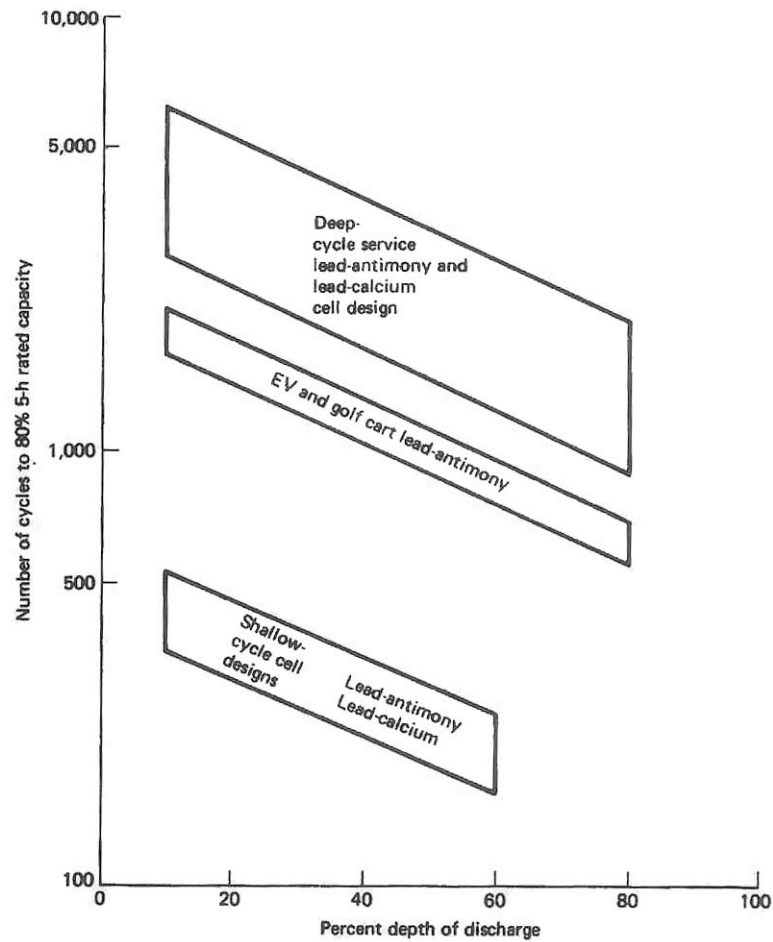



Short Primer on Batteries

Secondary battery charging

	charge method	current rate C(A)	charging energy efficiency
Lead-acid	constant current, constant voltage	0.1	75%
Nickel-Cadmium (sealed)	constant current	0.3	60%
Nickel-metal hydride	constant current, constant voltage	0.1	60%
Lithium ion	constant current, constant voltage	0.2	95%

Short Primer on Batteries

Constant voltage charging (lead-acid)

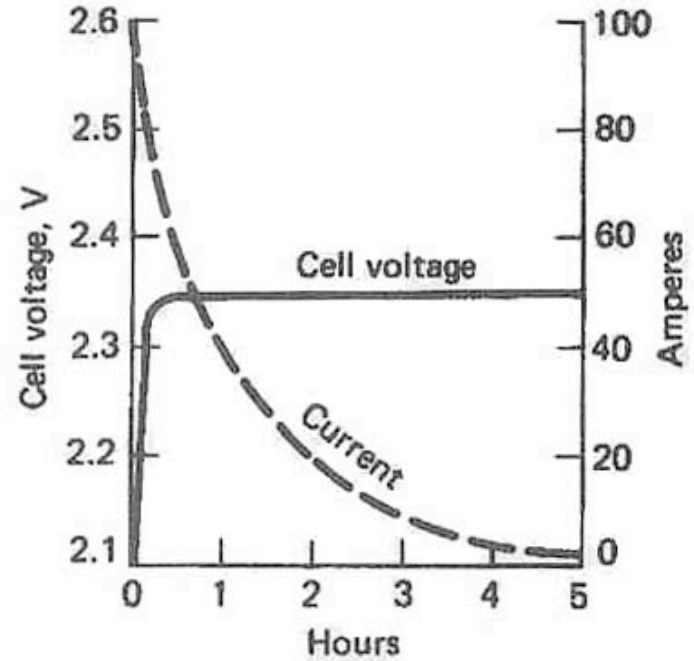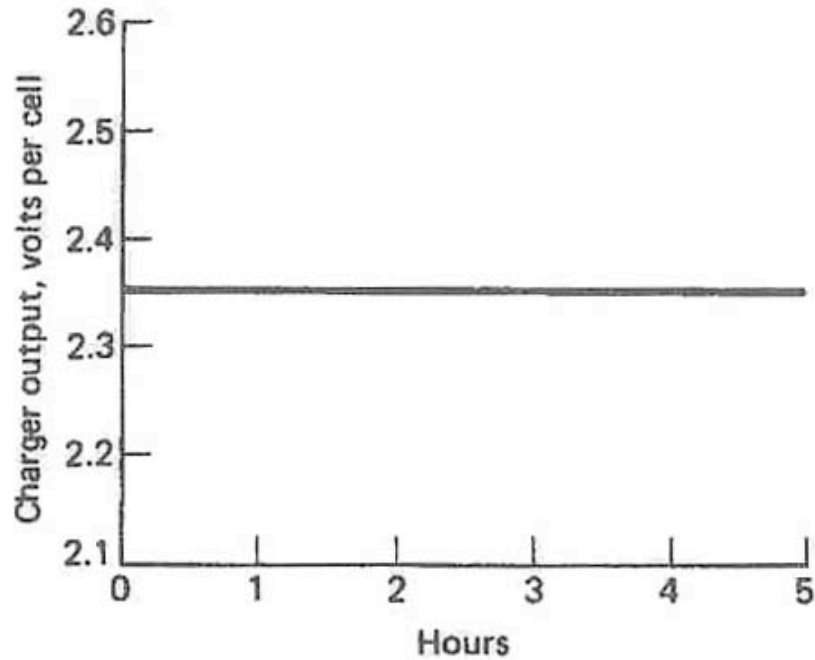

Short Primer on Batteries

Constant current charging (lead-acid)

