

Engine Cycles

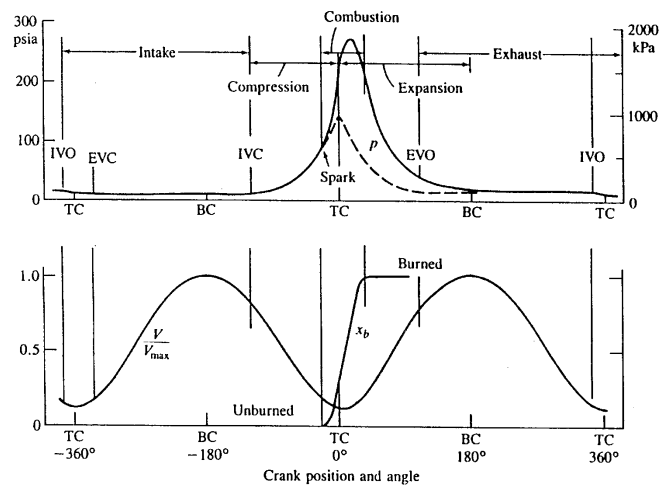


Figure 1-8

Sequence of events in four-stroke spark-ignition engine operating cycle. Cylinder pressure p (solid line, firing cycle; dashed line, motored cycle), cylinder volume V/V_{max} , and mass fraction burned x_b are plotted against crank angle.

Pressure-volume diagram

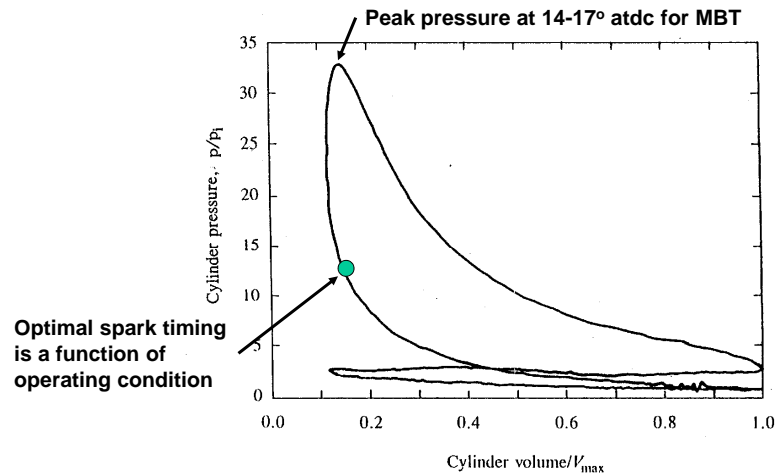


Fig. 5-1 Pressure-volume diagram of firing SI engine; compression ratio=8.4, 3500 rpm, intake pressure = 0.4 bar, Net IMEP = 2.9 bar

Ideal models of engine processes

Table 5.1

| Process | Assumptions |
|--|---|
| Compression (1-2) | 1. Adiabatic and reversible (hence isentropic) |
| Combustion (2-3) | 1. Adiabatic 2. Combustion occurs at (a) Constant volume (b) Constant pressure (c) Part at constant volume and part at constant pressure (called limited pressure) 3. Combustion is complete ($\eta_c = 1$) |
| Expansion (3-4) | 1. Adiabatic and reversible (hence isentropic) |
| Exhaust (4-5-6) and intake (6-7-1) | 1. Adiabatic 2. Valve events occur at top- and bottom-center 3. No change in cylinder volume as pressure differences across open valves drop to zero 4. Inlet and exhaust pressures constant 5. Velocity effects negligible |

Different ideal cycles


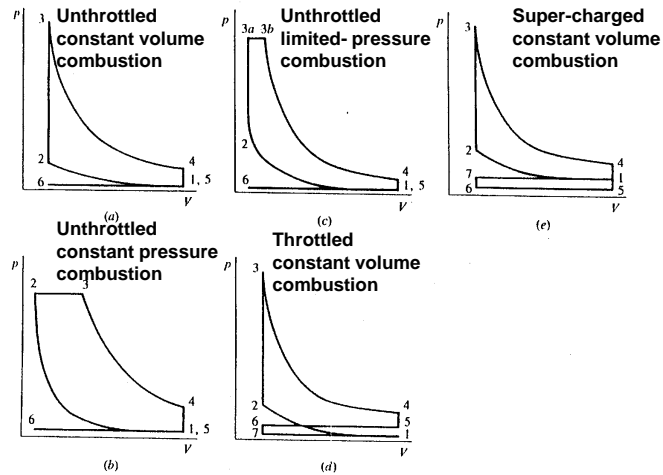


Fig 5.2 Pressure-volume diagrams of ideal cycles

Ideal constant volume combustion cycle fuel conversion efficiency

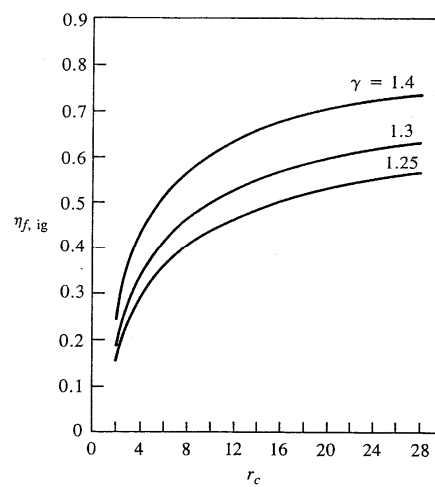


Ideal efficiency

$$\eta_{f,ig} = 1 - \frac{1}{r_c^{\gamma-1}}$$

γ = specific heat ratio

Fig. 5-5

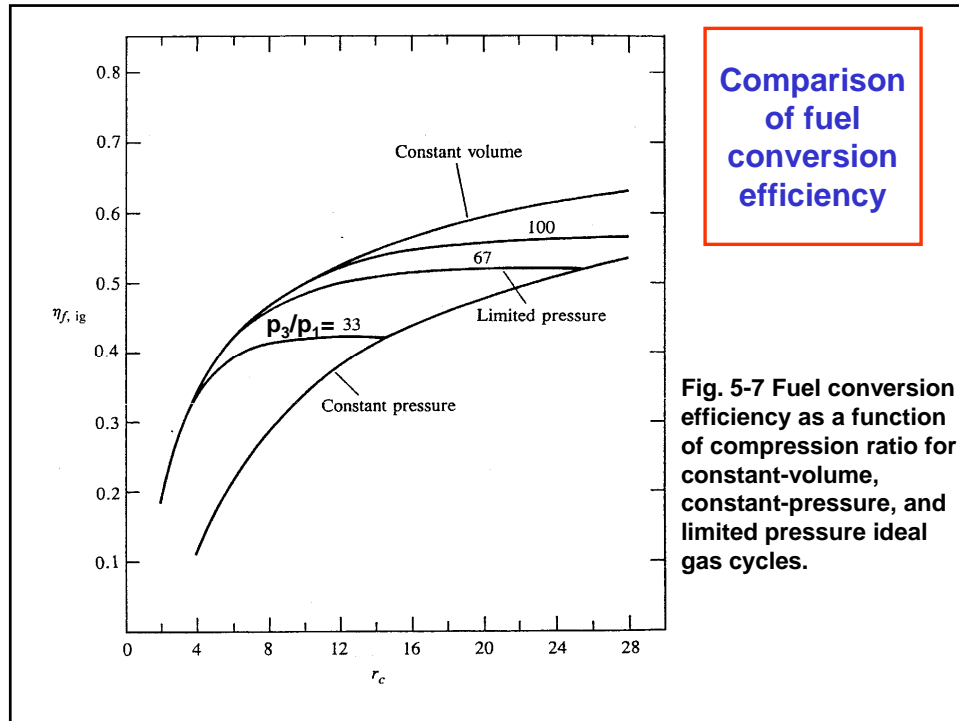


Factors affecting fuel conversion efficiency

These ideal engine cycle analysis results show that expansion ratio r_c and gas composition (through γ the ratio of specific heats) both affect the cycle's fuel conversion efficiency because:

1. The expansion ratio (which may or may not equal to the compression ratio) determines how much work is extracted over the expansion stroke.
2. The higher the value of γ the more the temperature falls during expansion, the larger the energy change and hence the larger the expansion stroke work.
3. The compression stroke work is of order one-sixth of the expansion stroke work so expansion stroke work effects dominate.

Miller cycle

- Late intake valve closing
 - Effective compression ratio is less than expansion ratio
- Advantages
 - Lower compression temperature
 - Better knock tolerance
 - Lower NOx emission
- Drawback
 - Reduced trapped charge mass: loss in max power
 - Compensated for by turbo-charging or hybrid operation

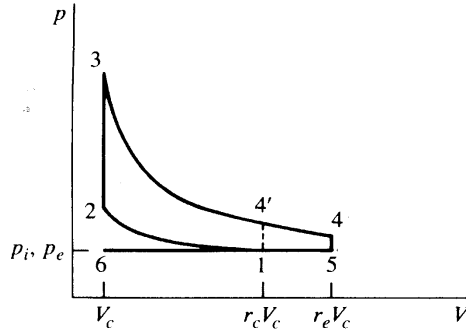

Effects of compression ratio

- Theoretical efficiency η_f increases with CR
- SI engine CR limited by knocking to 12 (13 with direct injection)
- Practical η_f values decreases at high CR
 - Heat transfer effect
 - Crevice effect
 - Dissociation effect
 - Friction
- Other considerations for diesel engines
 - Peak pressure
 - NOx emissions
 - Startability

Practical diesel engines have CR between 14 and 22

Effect of compression ratio on fuel conversion efficiency

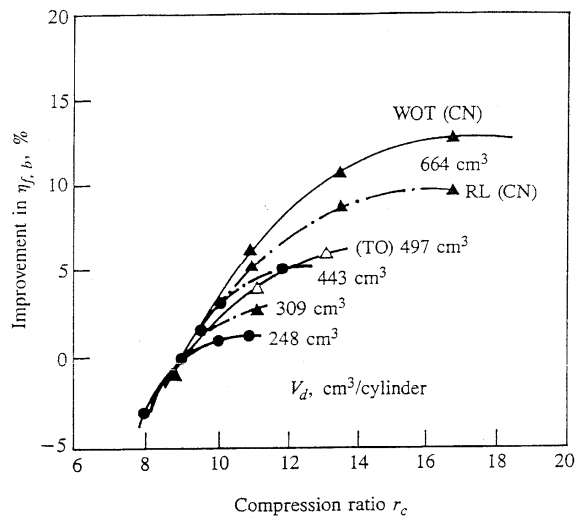


FIGURE 15-14
Relative brake fuel conversion efficiency improvement with increasing compression ratio of spark-ignition engines of different displaced volume per cylinder at part throttle (except top curve at WOT).¹⁹ RL road load. CN,¹⁷ TO.¹⁰