

Air Pollution and SI Engine Emissions

Atmospheric Pollution

- **SMOG**

O_3
– Ozone

NO_2
Nitrogen dioxide

$$\begin{array}{c} O \\ || \\ R-C-OONO_2 \end{array}$$

PAN(Peroxyacyl Nitrate)

- **TOXICS**

– CO, Benzene, 1-3 butadiene, POM (Polycyclic organic Matters), Aldehydes

Primary Pollutants: Direct emissions from vehicles


➤ CO, HC, NO_x, PM(Particulate matters), SO_x, aldehydes

Secondary Pollutants: From interaction of emissions with the atmosphere


➤ O₃, PAN, NO₂, Aldehydes

Atmospheric Pollution


Smog formation:

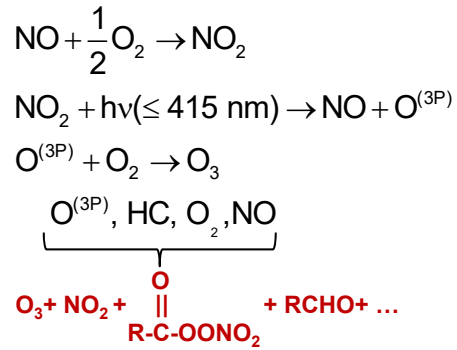

Acid rain:

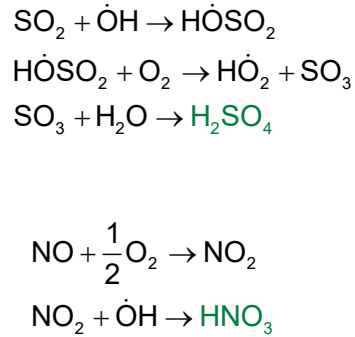

Emission requirements

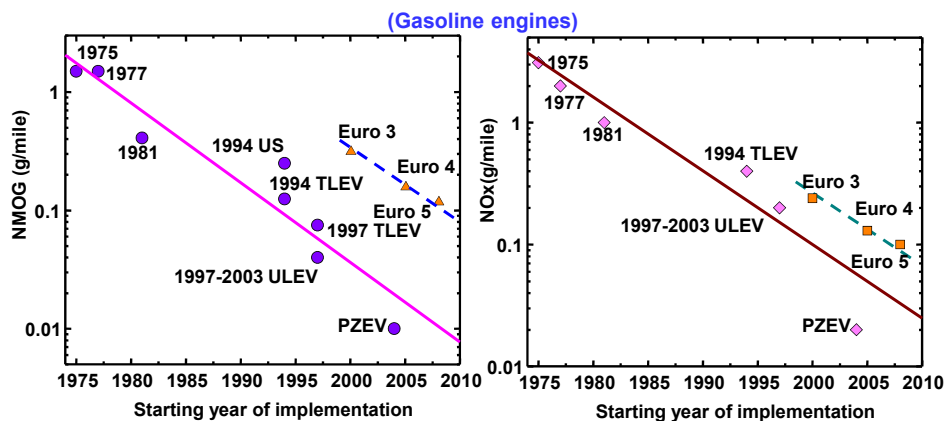


Historic trend: Factor of 10 reduction every 15 years


At 28.5 miles per gallon, 100 g of fuel is burned per mile.
Emission of 0.01 g/mile means 10^{-4} g/g-of-fuel

PZEV regulation (120,000 miles guarantee):
 NMOG 0.01 g/mile
 CO 1.0 g/mile
 NOx 0.02 g/mile

FTP 23 cycles – Each cycle consists of idle, accel., cruise, and decel. Three test phases:
 Transient phase (0-505s); stabilized phase (505 to 1376s); warm start (repeat of first 505 s test after 10 min. shut down)

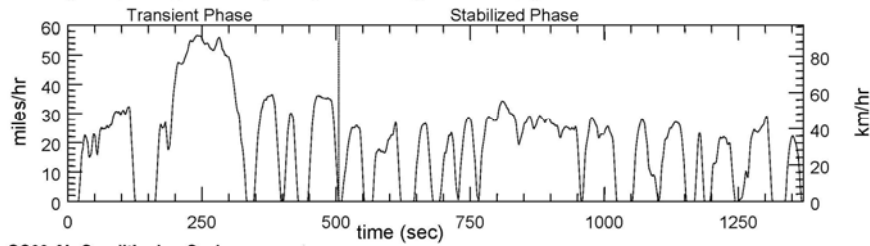


SC03 Air Conditioning Cycle

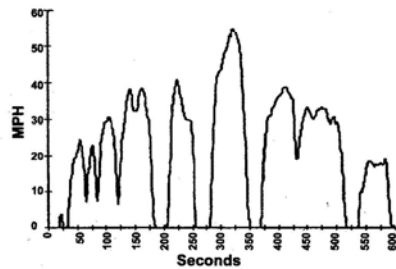

Total duration : 594 s Max. speed : 54.8 mph

US06 High speed/High load cycle

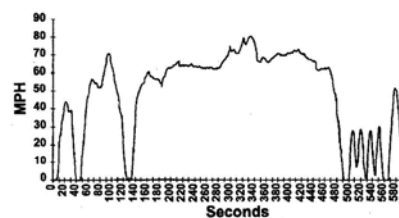

Total duration : 600 s Max. speed : 80.3 mph
 Max. acceleration: 8 mph/second

Air Conditioning Cycle:

10 min. soak, 95°F ambient temperature, 40% relative humidity,
 850W/m² solar load, AC max cooling

EMISSIONS MECHANISMS

- CO emission
 - Incomplete oxidation of fuel under fuel rich conditions
- NO_x emisison
 - Reaction of nitrogen and oxygen in the high temperature burned gas regions
- Particulate matter (PM) emission (most significant in diesel engines; there are significant PM emissions in SI engines in terms of number density, especially in direct injection engines)
 - Particulates formed by pyrolysis of fuel molecules in the locally fuel rich region and incomplete oxidation of these particles
 - Lubrication oil contribution
- Hydrocarbon emissions
 - Fuel hydrocarbons escape oxidation (or only partially oxidized) via various pathways

Typical steady state SI engine-out emissions


- NO_x is a few thousand parts per million
- CO is around 0.5-1% for stoichiometric operation
- HC is 500-2000 ppm for fully warm up engine
- PM very small by mass

CO Emissions Mechanism

- CO is the incomplete oxidation product of the fuel carbon
- Significant amount in fuel rich condition
- Immediately following combustion, CO is in chemical equilibrium with the burned gas
- During expansion, as the burned gas temperature decreases, CO is 'frozen'
 - Empirical correlation

$$\frac{[\text{CO}][\text{H}_2\text{O}]}{[\text{CO}_2][\text{H}_2]} \approx 3.7$$


CO is mostly an A/F equivalence ratio issue

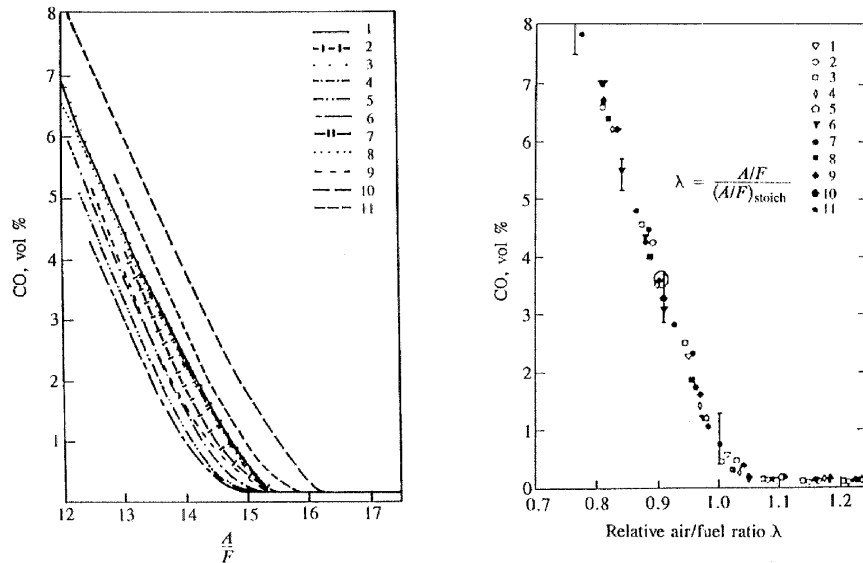

NO FORMATION CHEMISTRY

• Zeldovich Mechanism

See table 11.1 for rates






- NO formation is kinetically controlled
- Reactions involving N is fast; N is in steady states ($d[\text{N}]/dt \approx 0$)
- Very temperature sensitive

• At high temperature ($\geq 1000\text{K}$), equilibrium favors NO versus NO_2 formation

- Engine-out $[\text{NO}_2]/[\text{NO}_x] \leq 2\%$

*Extended Zeldovich mechanism is quantitatively important; see text: discussion immediately following Eq. (11.7), and Table 11.2.

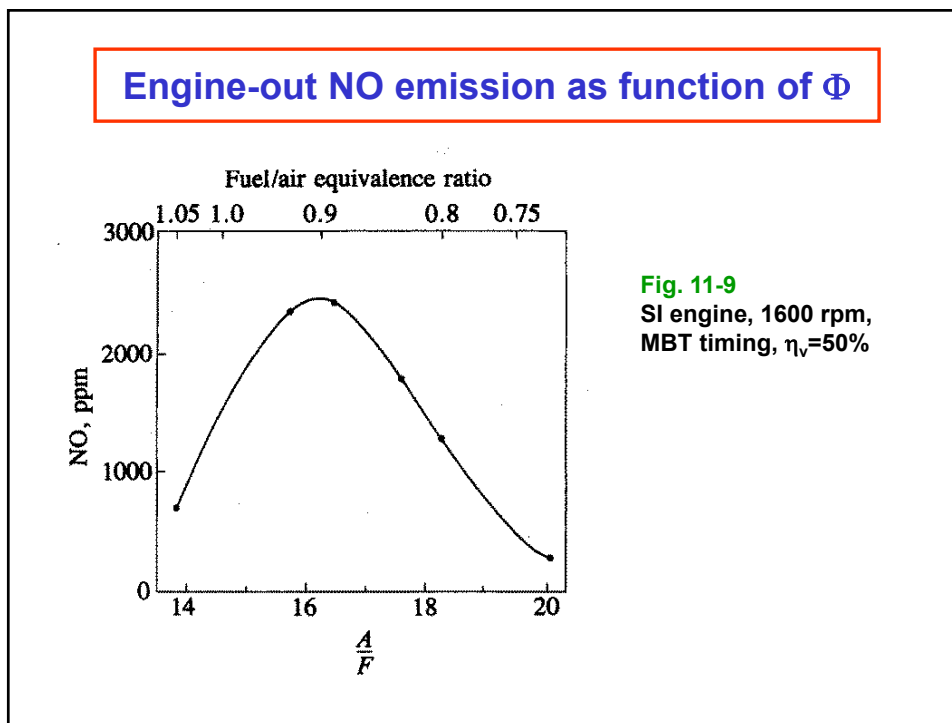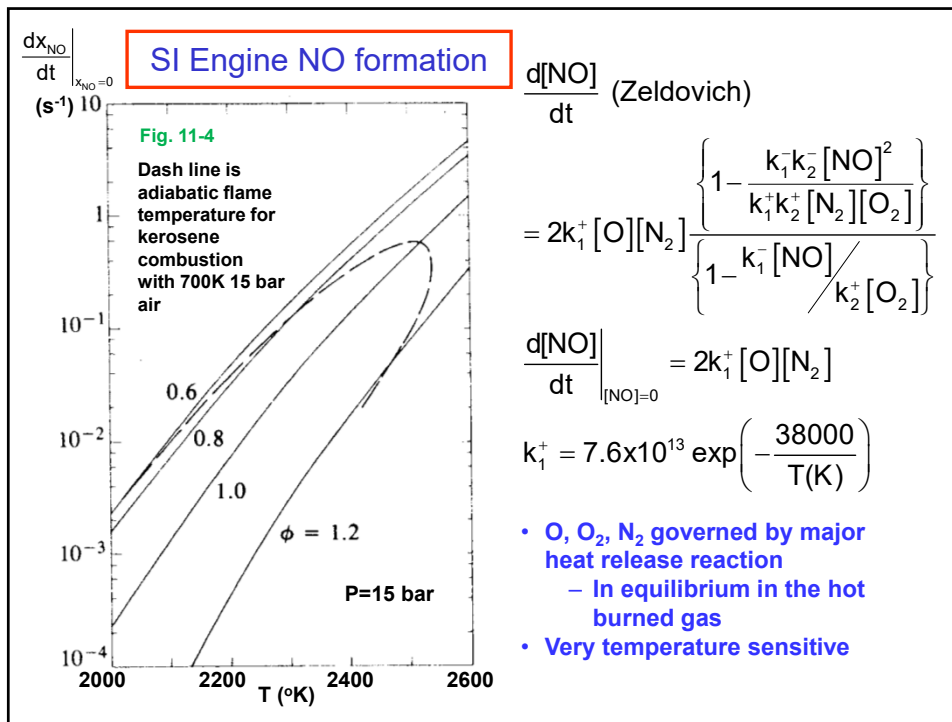

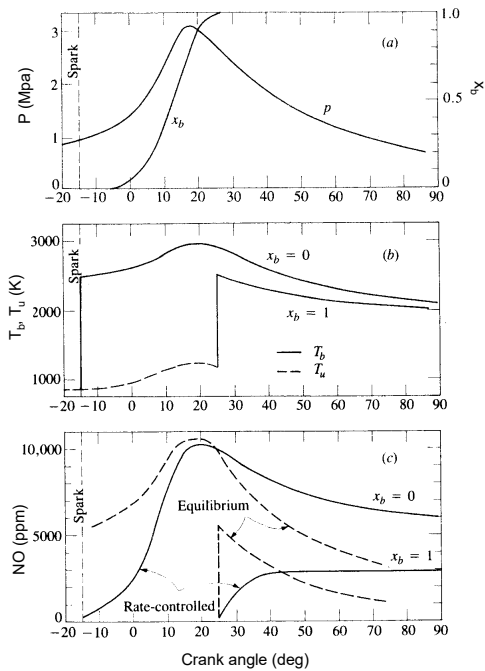

Thermodynamic state of charge

Fig. 9-5 Cylinder pressure, mass fraction burned, and gas temperatures as function of crank angle during combustion.

- NO formed in burned gas
- Different "layers" of burned gas have substantially different temperature, hence different amount of NO production
- In reality, there is mixing between the layers
- Rate is non-linear in temperature

13

In-cylinder NO control

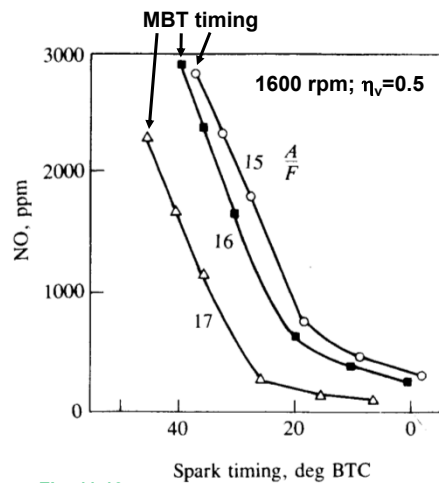


Fig. 11-13

- Temperature is the key
 - Spark retard
 - EGR (Exhaust Gas Recirculation)

NO control by EGR

- EGR is a dilution effect
 - Reduce burned gas temperature via increase in thermal inertia

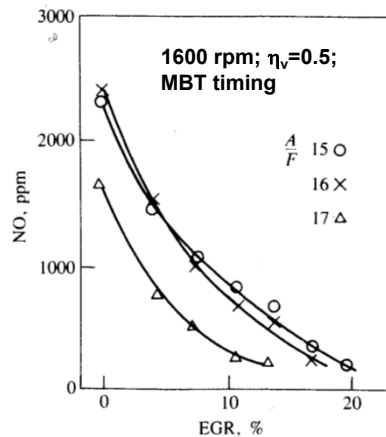


Fig. 11-10

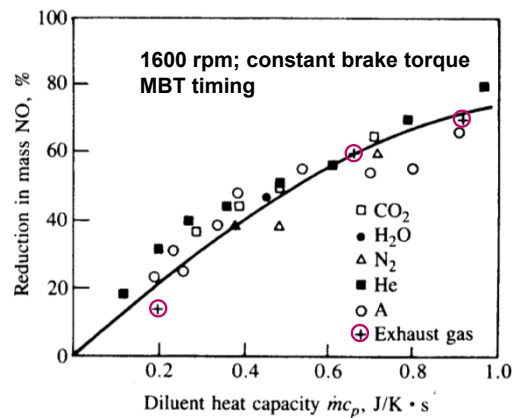


Fig. 11-11

HC emissions

- Importance
 - Photochemical smog (irritant; health effects)
 - Significant loss of fuel energy
- Measurement
 - Flame Ionization Detector (FID)
 - Chemi-ionization process
 - Signal proportional to C atom concentration
- Emissions regulation: NMOG as g/mile
 - EPA definition of HC
 - Normal gasoline CH_{1.85}
 - Reformulated gasoline CH_{1.92}
 - Compressed natural gas CH_{3.78}
 - Need speciation to detect CH₄

HC Impact on smog formation

- Species dependent
 - Assessed as MIR of individual VOC
- VOC = volatile organic compounds

$$\text{Kinetic reactivity} = \frac{\text{VOC reacted}}{\text{VOC input}}$$


$$\text{Mechanistic reactivity} = \frac{\text{Ozone formed}}{\text{VOC input}}$$

Maximum Incremental Reactivity (MIR)

$$\text{MIR} = \frac{m_{\text{ozone, test case; max}} - m_{\text{ozone, base case; max}}}{\text{VOC increment to base case}}$$

EKMA (Empirical Kinetic Modeling Approach) methodology: follow air column (Lagrangian) from 0800 using O₃ as indicator. Maximum O₃ formation occurs at about 1500-1700 hr.

Ozone production

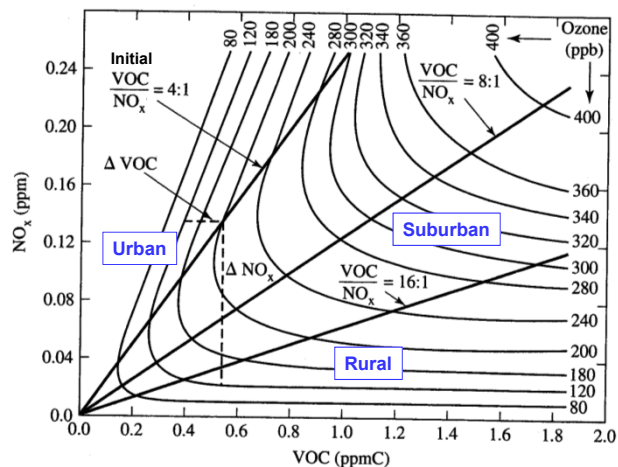

EKMA plot of the maximum ozone concentration as a function of the initial NO_x and VOC concentrations; from Fay & Golomb, *Energy and the Environment*, Oxford 2002.

APPENDIX Maximum Incremental Reactivity Values Used in This Paper					
	MIR (g O ₃ /g NMOC)		MIR (g O ₃ /g NMOC)		MIR (g O ₃ /g NMOC)
Ethane	0.250	Ethene	7.290	Benzene	0.420
Propane	0.480	Ethyne	0.500	Toluene	2.730
2-Methylpropane	1.210	Propene	9.400	Ethylbenzene	2.700
n-Butane	1.020	Propadiene	7.290	m-Xylene	8.160
2,2-Dimethylpropane	0.370	Propyne	4.100	p-Xylene	8.600
2-Methylbutane	1.380	2-Methylpropane	5.310	Styrene	2.220
n-Pentane	1.040	1-Butene	8.910	o-Xylene	8.460
2,2-Dimethylbutane	0.820	1,3-Butadiene	10.890	Isopropylbenzene	2.240
Cyclopentane	2.390	c-2-Butene	9.940	n-Propylbenzene	2.120
2,3-Dimethylbutane	1.070	1-Butyne	9.240	1,3-Dimethylbenzene	7.200
2-Methylpentane	1.530	c-2-Butene	9.940	1,3,5-Trimethylbenzene	10.120
3-Methylpentane	1.520	3-Methyl-1-Butene	6.220	1,2-Methylbenzene	7.200
n-Hexane	0.900	2-Butyne	9.240	1,2,4-Trimethylbenzene	8.850
2,2-Dimethylpentane	1.400	1-Pentene	6.220	Isobutylbenzene	1.890
Methylcyclopentane	2.820	2-Methyl-1-Butene	4.360	1,2,3-Trimethylbenzene	8.850
2,4-Dimethylpentane	1.780	2-Methyl-1,3-Butadiene	9.080	Indane	1.060
2,2,3-Trimethylbutane	1.320	c-2-Pentene	8.800	1,3-Dialkylbenzene	6.450
Cyclohexane	1.290	c-2-Pentene	8.800	1,4-Dialkylbenzene	6.450
3-Methylhexane	1.080	2-Methyl-2-Butene	6.410	1,2-Dialkylbenzene	6.450
2,3-Dimethylpentane	1.510	Cyclopentadiene	7.660	1-Methyl-2-Propylbenzene	9.070
Cyclohexane	1.400	4-Methyl-1-Pentene	4.420	1,4-Dimethylbenzene	9.070
c-1,3-Dimethylcyclopentane	1.850	3-Methyl-1-Pentene	4.420	1,2-Dimethyl-2-Ethylbenzene	9.070
1,3-Dimethylcyclopentane	1.850	c-3-Hexene	6.690	1,3-Dimethyl-2-Ethylbenzene	9.070
2,2,4-Trimethylpentane	0.930	c-3-Hexene	6.690	1,2,4,5-Tetramethylbenzene	9.070
n-Heptane	0.810	c-3-Hexene	6.690	1,2,3,5-Tetramethylbenzene	9.070
Methylcyclohexane	1.850	3-Methyl-2-Pentene	6.690	Methylindane	1.060
2,5-Dimethylhexane	1.630	2-Methyl-2-Pentene	6.690	1,2,3,4-tetramethylbenzene	9.070
Ethylcyclopentane	2.310	c-3-Hexene	6.690		
3,3-Dimethylhexane	1.200	c-2-Hexene	6.690		
2,3,4-Trimethylpentane	1.600	3-Methyl-c-2-Pentene	6.690	Methyl-1-Butyl Ether	0.820
2,3-Dimethylhexane	1.320	3-Methylcyclopentene	5.690	Ethyl-1-Butyl Ether	1.980
2-Methylheptane	0.960	3-Methyl-1-Hexene	3.480		
4-Methylheptane	1.200	c-2H-3-Heptene	5.530	Methanol	0.560
3-Methylheptane	0.960	2-Methyl-Hexene	5.530	Ethanol	1.340
3,3-Dimethylcyclohexane	1.940	c-2-Heptene	5.530		
2,2,5-Trimethylhexane	0.970	1-Methylcyclohexene	5.520	Formaldehyde	7.150
Octane	0.610	1,4-Octene	5.290	Acetaldehyde	5.520
1,3-Dimethylcyclohexane	1.850			Acrolein	6.770
2,4-Dimethylheptane	1.340			Propionaldehyde	6.530
c-1,2-Dimethylcyclohexane	1.940			Acetone	0.560
3,5-Dimethylheptane	1.140				
2-Methyloctane	1.140				
3-Methyloctane	1.140				
n-Nonane	0.540				
2,2-Dimethyloctane	1.010				
2,4-Dimethyloctane	1.010				
Branched C10's	1.010				
Branched C10's	1.010				
3-Methylnonane	1.010				
n-Decane	0.470				
n-Undecane	0.420				
n-Dodecane	0.380				

Carter Index for
Ozone Forming
Potential
(CARB July, 1992)

Table from SAE
Paper 932718
(Tauchida et al.)

Methodology explained in SAE Paper 900710
(Low and Carter)

HC sources

- Non-combustion sources
 - Fueling loss
 - Diurnal emissions
 - Running loss
 - Hot soak
 - Blow by
 - A few L/min; depends on load and RPM
 - At light load, 1500 rpm, blow by ~ 4L / min


HC sources (cont.)

- Combustion sources
 - 300 to 3000 ppmC1 typical
 - Stoichiometric mixture is ~120,000 ppmC1
 - Main combustion: very little HC except for very lean/ dilute or very late combustion (misfires/ partial burns)
 - Various mechanisms for HC to escape from main combustion
 - Cold start emissions (wall film) especially important


SOURCES OF UNBURNED HC IN SI ENGINE

- a) Crevices
- b) Absorption and desorption in oil layers
- c) Absorption and desorption in deposit
- d) Quenching (bulk and wall layer)
- e) Liquid fuel effects
- f) Exhaust valve leakage


Crevice HC mechanism

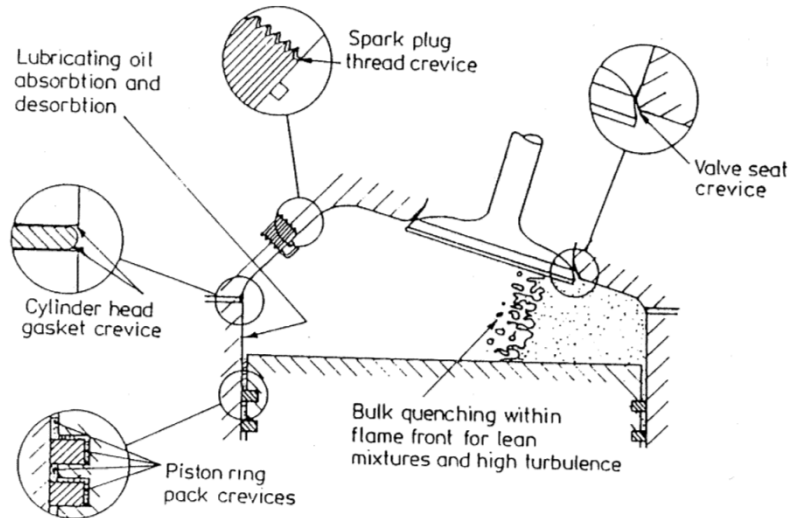

Absorption and desorption of fuel vapor

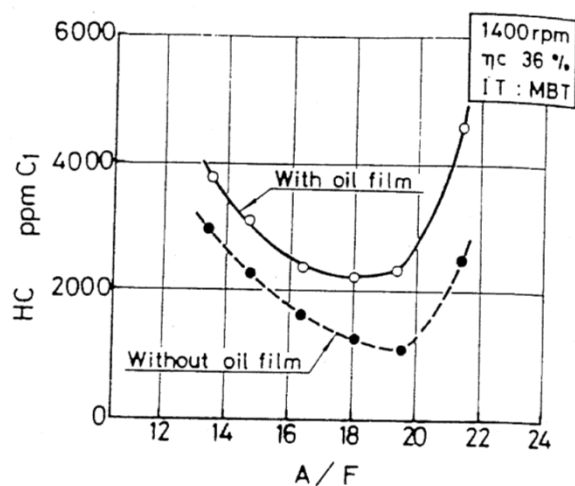

Ishizawa and Takagi (Nissan)
 JSME Int. Jnl. 1987 Vol. 30 No. 260 pp. 310-317

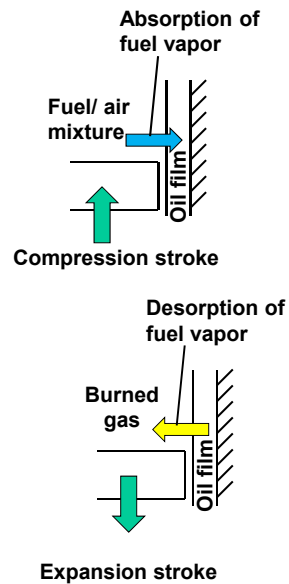

HC pathway


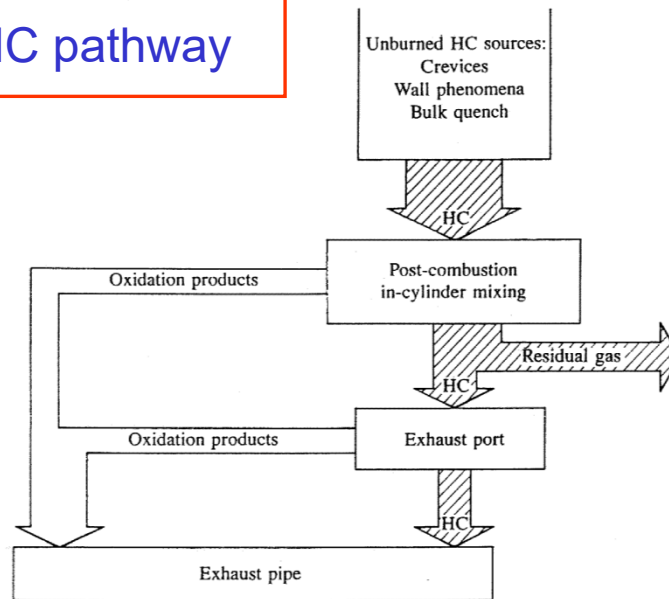


Fig. 11-31

Hydrocarbon Pathway - Steady State, cruise condition

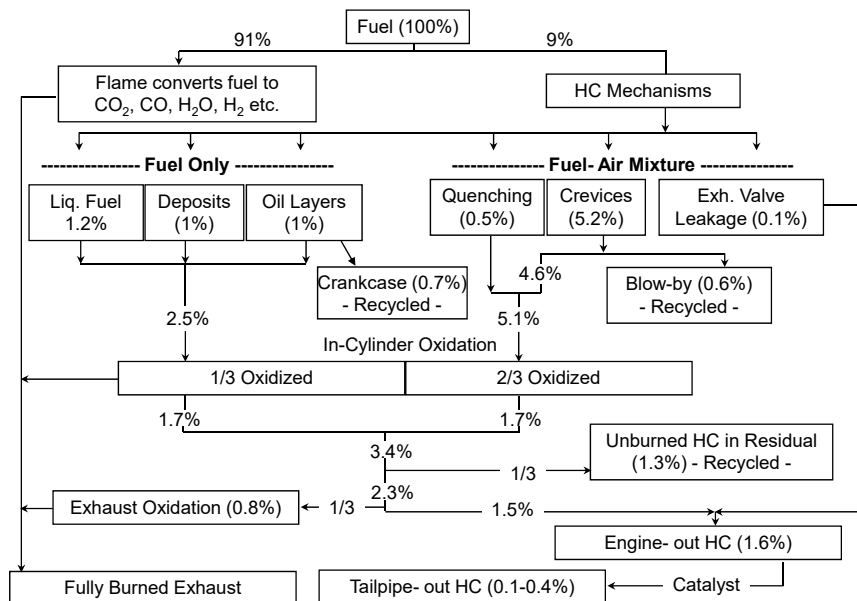

HC Sources: Magnitudes and Percent of Total Engine-out Emissions*

(SAE Paper 932708)

Source	% Fuel Escaping Normal Combustion	Fraction Emitted as EOHC	% Fuel as HC Emissions	% of Total EOHC Emissions
Crevices	5.2	0.15 [*]	0.682 [*]	42.6
Quench	0.5	0.15	0.074	4.6
Oil Layers	1.0	0.09 ^{**}	0.090 ^{**}	5.6
Deposits	1.0	0.30	0.300	18.7
Liquid Fuel	1.2	0.30	0.356	22.2
Valve Leakage	0.1	1.00	0.100	6.3
Total	9.0		1.60	100

* Blowby (0.6%) subtracted

** Amount to crank case (0.7%) subtracted

*steady state cruise condition (1500 rpm, 2.8 bar NIMEP)

HC control

- Reduce crevice volume
- Keep liner hot
- Spark retard
 - Higher burned gas temperature in the later part of expansion stroke and higher exhaust temperature
- Comprehensive cold start strategy
 - Retard timing, fuel rich followed by exhaust air injection