

M-SERIES product catalogue

AIR CONDITIONER & HEAT PUMP





Mr.SLIM[®]



M-SERIES product catalogue

The Attraction of Being Untraditional

Mr. Slim M-Series is the ideal solution for homes and light commercial areas with varying needs and applications. M-Series ductless systems are



stylish, compact, quiet, attractive and secure. Advanced technology also means your Mr. Slim ductless system will run more efficiently than a conventional unit, saving you from rising energy costs.

Designed for the Toughest Environment



No two buildings are alike. From condos to cottages to houses, each design, each floor plan, each room offers its own challenges for something as important as proper air conditioning and circulation. Mr. Slim systems are designed to adapt

to your needs. Reliable, easy to install, and extremely quiet, Mr. Slim systems are powerful enough for the toughest situations, no matter what part of the country you live in.



Mr.SLIM

ENERGY EFFICIENT

Variable Compressor Speed Inverter Technology



At the heart of Mr. Slim M-Series ductless air conditioners and heat pumps lies Variable Compressor Speed Inverter (VCSI) technology. Unlike conventional machines which only cycle between On and Off, VCSI systems detect changes in room temperature and readjust the compressor speed to provide high-speed cooling and heating as needed. This means the space maintains a consistent, accurate temperature for the ultimate in comfort, all while using only the power that's needed. By adjusting the air conditioning capacity to run more efficiently, your energy costs are reduced.


VCSI technology saves energy in two ways:

VCSI features soft-start control, which means the compressor starts up at a minimum speed, then increases its speed to match the required load. This prevents the compressor from drawing the extra amps needed with every start-up, as is the case with a conventional compressor that always runs at the same full speed.


2 Once the desired temperature of the room is reached, the compressor slows down to maintain a constant temperature. By slightly adjusting speed rather than shutting off and on again, electrical loads are kept constant rather than wastefully peaking.

VCSI systems Conventional systems VCSI compressor speeds up and slows down to Conventional compressor turns on and off to maintain the conditioned space temperature. maintain the temperature. A compressor draws more amps at start-up than any other time. Energy consumed by a VCSI compressor is directly Conventional compressor consumes maximum amount of energy to produce maximum amount of cooling or related to the required amount of cooling or heating. (Capacity changes as needed.) heating at all times. (Capacity does not change.) VCSI compressor helps system reach its set point Conventional compressor runs at same RPM for longer period of time, then switches on and off to guicker by running at a higher RPM for a shorter period of time, then ramps down to maintain temperature. maintain temperature.

Indoor temperature swing is minimized with the Conventional system kicks back on at full speed VCSI system because the indoor coil activates longer. to compensate for small changes in temperature. As temperature changes slightly, compressor speed

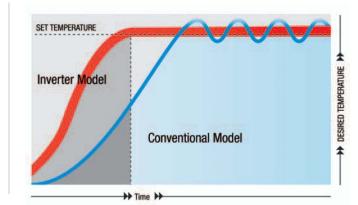

Conventional air conditioners take a longer time to reach their set-point temperature and can only offer you a range of temperatures between the On/Off cycles. VCSI systems closely control the variable compressor speed, so they reach the desired temperature faster and are able to keep the temperature constant by sensing the indoor cooling or heating needs. This allows our products to run more efficiently and reduce energy costs.

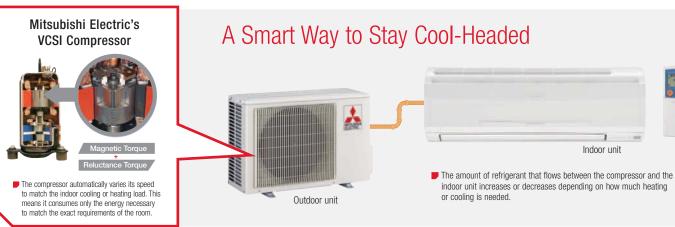

also adjusts slightly to compensate.

EASY TO INSTALL. EASY TO ENJOY

Mitsubishi Eliminates the Ductwork, and the Guesswork


▶ The main difference between a Mitsubishi Electric Mr. Slim system and a traditional central system is the absence of ducts to distribute the air. This is of significance, especially for locations that lack existing ductwork.

M-Series split ductless systems consist of two units, the indoor unit and the outdoor unit, which are connected by two refrigerant lines running through a small 10 cm opening in the wall or ceiling.

Installation is easy: simply mount the indoor and outdoor units, connect the refrigerant lines and make the needed electrical connections to power the system. Unlike conventional air conditioning units that cycle on and off, the M-series system is one of the quietest systems on the market. Improvements to the fan blade design and the new grille shape has made outdoor operation very quiet. This makes Mr. Slim the ideal solution for cooling any home or cottage.

Ductless systems are available in sizes from 9,000 to 24,000 BTU/h, offering one of the widest selections in the industry.

Refrigerant pipes are all you need to connect indoor and outdoor units. This eliminates the need for expensive and obtrusive ductwork to cool your home.



Home Comfort, Room by Room

The ease of installation and flexibility of Mr. Slim means you don't have to restrict your comfort to only one part of your home.



The outdoor unit is so sleek and quiet, your neighbours won't even know you're heating or cooling your home.



Bedroom: Steady temperatures throughout the night let you sleep soundly in any weather.



Den: Just knowing how efficiently Mr. Slim operates can help give your home a more relaxed atmosphere.



Living Room: Whether you're working or relaxing, you'll notice the difference that a constant temperature makes.



All Mr. Slim systems installed by an Authorized HVAC⁺ Installer under the Mitsubishi Electric Quality Dealer Training Program will receive an upgrade to an extended 6-year parts and 6-year compressor warranty instead of the standard 2-year parts and 6-year compressor warranty. See your Mitsubishi Electric Authorized Dealer for details.

*When installed by an Authorized HVAC Installer. †Heating, Ventilating, and Air Conditioning.

📩 MITSUBISHI ELECTRIC


Mr.SLIM FEATURES



Catechin Plus Air Purifying Systems consist of Catechin Pre-Filters and Anti-Allergy Blue Enzyme Filters which deodorize, deactivate allergens, eliminate bacteria and promote antiviral effects.

Catechin Plus Pre-Filter


Catechin is a bioflavonoid found in green tea and is known for its deodorizing, anti-bacterial and antiviral properties. With our innovative technology, Catechin has been infused deeply into every cell of the pre-filter to keep the air in your home healthy. Catechin Pre-Filters are washable and are manufactured to last up to 10 years or longer.



Molecules of the Hybrid Catechin Pre-Filter

Anti-allergy **Blue Enzyme Filter**

Traps dust, pollen, mites and other particles that can cause allergic reactions. The artificial enzyme catalyst helps break down S-S bonds in these allergens, transforming them into harmless proteins.



Secono Cool

Intelligent temperature control feature that adjusts airflow direction depending on air outlet temperature. Gain up to 20% in energy efficiency by raising temperature 2 degrees without any loss in comfort.


Conventional Cooling

CONVENTION	AL COOLING	"ECONO COOL" ON
Ambient Temperature	35° C/95° F	35°C/95°F
Set Temperature	25°C/77°F	27°C/80.6°F
Sensing Temperature	30°C/86°F	29.5° C/85.9° F



PAM Control

Pulse Amplitude Modulation controls the form of the current wave so that it conforms to the supply voltage wave. With PAM control, up to 98% of the input power supply is effectively used.



LCD Wireless **Remote Control**

Easier to use than most TV remotes, the wireless controller features a large and easy-toread display, and lets you adjust fan speed and output modes from anywhere in the room.



Cooling at -10°C/14°F

Conventional air conditioners don't cool when outdoor temperatures drop below 20°C/67°F. With Mr. Slim intelligent fan speed control, the system performs in cooling mode even when outdoor temperature is down to -10°C/14°F.

FEATURES

Fuzzy Logic "I Feel"

On auto mode selection, the fuzzy logic control system adjusts conditions to suit you. By tapping the Too Cold or Too Warm button on the remote, the optimum temperature is set and memorized, recalling it whenever you turn on the air conditioner.

Super Quiet Technology

So quiet, you may not even notice it's on. Advanced technology from Mitsubishi Electric has led to the creation of super-quiet air conditioners suitable for all rooms of your home.

▼22dB(A)	(MSZ-A09NA)		
25dB(<i>i</i> Sound recordin room	Empty	35dB(A) Whisper	40dB(A) Quiet photo studio

Powerful Cool

This automatic, one-touch system cools rooms faster by producing 10% more airflow than the 'high fan' speed. This operation automatically returns to its regular setting after 15 minutes for optimized energy efficiency.

😳 Auto Change Over

The system automatically switches between cooling and heating to compensate for changes in room temperature. This maintains comfort with efficient and totally hands-free operation.

New LEV Control

The Linear Expansion Valve (LEV) automatically adjusts the volume of refrigerant flow through the indoor coil according to air conditioning load. When the load is low, the volume is decreased to allow



for efficient and economical operation

GRANCE Wide & Long Airflow

With the wireless remote, you can adjust left and right airflow directions. Combine this with the 5-Step Vane and Long controls, you can adjust the airflow into 42 different patterns reaching as far as 39 ft from the unit.



Exclusive for MSY/MSZ-A24NA

🔁 Auto Mode

Set vane angles and fan speeds to automatically create the most efficient settings for your room.

5-Step Vane Control & Swing Mode


Use your remote to select from five airflow patterns and set the vane to swing automatically for maximum efficiency - all from the comfort of your chair.

Auto Restart

Automatically returns to previous settings after a power blackout. You can now sleep peacefully through the night without having to get up and turn your air conditioner back on.

Anti-rust

Outdoor unit cabinets are all specially treated with an anti-rust coating to resist the harshest conditions.



Self-Diagnostic Function


LED display on the indoor unit flashes to indicate areas to check in the event of malfunctions.

24-Hour ON/OFF Timer

Use the timer to set start and stop times. Set for single use or daily repeat.

Easy-Clean Design

Front panel detaches easily, allowing you to clean vents and filters so as to maintain operating efficiency and energy savings.







SINGLE DUCTLESS SPLIT SYSTEMS

COOLING ONLY

- Catechin Plus Air Purifying System
- Variable Compressor Speed Inverter Technology
- Ozone-Friendly R-410A Refrigerant
- Significant Energy Savings (up to 30%)
- Fuzzy Logic "I Feel" Mode for Comfort Cooling
- Super-Quiet Technology
- Wide & Long Airflow Up to 100° (MSY-A24NA)
- Long Pipe Runs Up to 100 ft. (MSY-A24NA)
- Refrigerant Pre-Charged
- Easy Installation No Ductwork Needed
- 2-Year Parts Warranty
- 6-Year Compressor Warranty





		MS-A09WA	MS-A12WA	MSY-A15NA	MSY-A17NA	/ MSY-A24NA	
Capacity (Min ~ Max)	Cooling Btu	/h 9,500	12,000	3,100 ~ 15,000	3,100 ~ 16,200	4,400 ~ 22,000	
Power Consumption (Min ~ Max)	Cooling	W 870	1,070	210 ~ 1,690	210 ~ 2,070	290 ~ 2,880	
SEER		13.0	13.0	16.0	16.0	16.0	
Capacity Control		Fixed Co	ompressor	, ,	Variable Compressor Speed	d	
Refrigerant				R-410A			
Power Supply	V, Phase, Ha	. 115	, 1, 60		208-230, 1, 60		
Airflow (Hi)	CFM Dry	335/3691	406/4471	381/4201	381/420 ¹	568/625 ¹	
Moisture Removal	Pints/h	2.7	3.2	4.7	5.1	7.3	
Sound Indoor (Low / Hi)	Cooling dB(A) 26/40	33/45	34/45	34/46	34/49	
Sound Outdoor	Cooling dB(A) 47	52	50	52	55	
Max. Fuse Size	Indoor A	15	15 15		15	15	
(Time Delay)	Outdoor A	15	20	15	15	20	
Min. Ampacity	Indoor A	1.2	1.2	1.0	1.0	1.0	
	Outdoor A	14	16	14	14	17	
Dimension	Indoor ir	i.	11 ¾ x 30) ¹ / ₁₆ x 8 ¹ / ₄		12 ¹ % x 43 % x 10 1	
(H x W x D)	Outdoor in	n. 21 % x 31 ½ x 11 ¼	23 ¹ % x 33 % x 11 %	21 ½ x 31	½ x 11 ¼	33 1/16 x 33 1/16 x 13	
Weight	Indoor It	os. 23	23	23	23	37	
	Outdoor Ik	os. 78	96	88	88	128	
Pipe Size	Liq. x Gas ir	1. 1⁄4 x ⅔		1/4 x 1/2		1⁄4 x 5⁄8	
Max. Height Difference	Ft.	35	35	40	40	50	
Max. Pipe Length	Ft.	65	65	65	65	100	

¹Powerful Mode

All test conditions are based on ARI 210/240. Rating conditions: Cooling — Indoor: 80°FDB, 67°FWB; Outdoor: 95°FDB, 75°FWB; Rated frequency Heating — Indoor: 70°FDB, 60°FWB; Outdoor: 47°FDB, 43°FWB; Rated frequency



SINGLE DUCTLESS SPLIT SYSTEMS

HEAT PUMP

- Catechin Plus Air Purifying System
- Variable Compressor Speed Inverter Technology
- Ozone-Friendly R-410A Refrigerant
- Significant Energy Savings (up to 30%)
- Auto Change Over between Cooling & Heating
- Super-Quiet Technology Only 22dB(A)
- High-Speed Cooling and Heating
- Wide & Long Airflow Up to 150° (MSZ-A24NA)
- Long Pipe Runs Up to 100 ft. (MSZ-A24NA)
- Refrigerant Pre-Charged
- Easy Installation No Ductwork Needed
- 2-Year Parts Warranty
- 6-Year Compressor Warranty





Model		MSZ-A09NA	MSZ-A12NA	MSZ-A15NA	MSZ-A17NA	MSZ-A24NA
Capacity (Min ~ Max)	Cooling Btu/h	5,500 ~ 9,000	5,700 ~ 12,000	3,100 ~ 15,000	3,100 ~ 16,200	4,400 ~ 22,000
Capacity (Min ~ Max)	Heating Btu/h	5,200 ~ 12,600	5,200 ~ 13,600	3,400 ~ 20,900	3,400 ~ 20,900	3,600 ~ 24,400
Power Consumption	Cooling W	390 ~ 690	395 ~ 1,170	210 ~ 1,690	210 ~ 2,070	290 ~ 2,880
(Min ~ Max)	Heating W	350 ~ 1,100	350 ~ 1,160	250 ~ 2,330	250 ~ 2,330	260 ~ 2,570
SEER	Cooling	17.0	17.0	16.0	16.0	16.0
HSPF	Heating	8.2	8.2	8.2	8.2	8.2
Capacity Control				Variable Compressor Speed	l	
Refrigerant				R-410A		
Power Supply	V, Phase, Hz			208-230, 1, 60		
Airflow (Hi)	CFM Dry	307/338 ¹	353/389 ¹	381/420 ¹	381/4201	568/6251
Moisture Removal	Pints/h	2.3	3.2	4.7	5.1	7.3
Sound Indoor (Low / Hi)	Heating dB(A)	22/38	22/42	34/45	34/46	34/49
Sound Outdoor	Heating dB(A)	48	48	51	53	55
Max. Fuse Size	Indoor A	15	15	15	15	15
(Time Delay)	Outdoor A	15	15 15		15	20
Min. Ampacity	Indoor A	1.0	1.0	1.0	1.0	1.0
	Outdoor A	12	12	14	14	17
Dimension	Indoor in.		11 ¾ x 30	¹ / ₁₆ x 8 ¹ / ₄		12 ¹ % x 43 % x 10 ½
(H x W x D)	Outdoor in.		21 ½ x 31	½ x 11 ¼		33 1/16 x 33 1/16 x 13
Weight	Indoor Ibs	. 23	23	23	23	37
	Outdoor Ibs	. 82	82	82 88 88		128
Pipe Size	Liq. x Gas in.	1/4	x ¾	1/4 :	× 1/2	1/4 X 5/8
Max. Height Difference	Ft.	40	40	40	40	50
Max. Pipe Length	Ft.	65	65	65	65	100
🖊 🛲 😿 \$) (MSZ-A24NA)	**	-55- (cooling 14 F

¹Powerful Mode









All test conditions are based on ARI 210/240. Rating conditions: Cooling — Indoor: 80°FDB, 67°FWB; Outdoor: 95°FDB, 75°FWB; Rated frequency Heating — Indoor: 70°FDB, 60°FWB; Outdoor: 47°FDB, 43°FWB; Rated frequency



MULTI-DUCTLESS SPLIT SYSTEMS

HEAT PUMP

- Catechin Plus Air Purifying System
- Variable Compressor Speed Inverter Technology
- Ozone-Friendly R-410A Refrigerant
- Significant Energy Savings (up to 30%)
- Up to 17 combinations of 2:1 or 3:1 systems
- Auto Change Over Between Cooling & Heating
- Super-Quiet Technology Only 22dB(A)
- High-Speed Cooling and Heating
- Long Pipe Runs Up to 230 ft. (MXZ-3A30NA)
- Refrigerant Pre-Charged
- Easy Installation No Ductwork Needed
- 2-Year Parts Warranty
- 6-Year Compressor Warranty





Ма	odel		MXZ-2A20NA	MXZ-3A30NA		
Capacity (Min ~ Max)	Cooling	Btu/h	7,800 ~ 20,000	12,600 ~ 28,400		
Capacity (Min ~ Max)	Heating	Btu/h	8,500 ~ 22,000	11,400 ~ 36,000		
Power Consumption	Cooling	W	630 ~ 2,150	1,000 ~ 3,250		
(Min ~ Max)	Heating	W	520 ~ 1,780	740 ~ 2,880		
SEER	Cooli	ng	15.0	16.0		
HSPF	Heati	ng	9.0	10.0		
Capacity Control			Variable Com	pressor Speed		
Refrigerant			R-410A			
Power Supply	V, Phase	e, Hz	208-230, 1, 60			
Connectable Indoor Units			2	3		
Sound Outdoor (Cooling / Heating)	dB(A)		49/51	49/49		
Max. Fuse Size (Time Delay)	A		20	20		
Min. Ampacity	A		15	15		
Dimension (H x W x D)	in.		27 ¹⁵ / ₁₆ x 33 ¹ / ₁₆ x 13	35 7/6 x 35 7/6 x 12 5/		
Weight	Outdoor Ibs.		130	158		
Pipe Size	Liq. x Gas	in.	1/4 x 3/8	1/4 x 1/2		
Max. Height Diff.	Ft.		33	33		
Max. Pipe Length	Ft.		164	230		


		Indoor Unit Combinations						
Indoor Units	MXZ-2A20NA	/	MXZ-3A30NA					
MSZ-A09NA (09)	09 + 09	09 + 09	12 +12	09 + 09 + 09				
MSZ-A12NA (12)	09 + 12	09 + 12	12 +15	09 + 09 + 12				
MSZ-A15NA (15)	09 + 15	09 + 15	12 +17	09 + 09 + 15				
MSZ-A17NA (17)	12 + 12	09 + 17	15 +15	09 + 09 + 17				
MSZ-A24NA (24)		09 + 24	15 +17	09 + 12 + 12				
			17 +17	12 + 12 + 12				

⊳∕ →	Cool	\$ %	VCSI	PAM		Çi,≑O Aco		I	m		5 5	 <u>≻83</u> ∠	14°F
									(MSZ-A24NA)			

MULTI-SPLIT SYSTEM

The Convenient Way to Enhance any Interior

▶ Your Mitsubishi Electric multi-split system could be the best solution for balancing the use of available space with available money. The innovative design of the system lets you mix and match several indoor units to fit the layout of the home. Plus, if you ever need to add additional units, they're easy to install and add to your existing system.

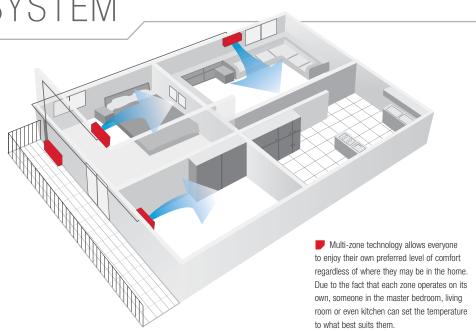

Mitsubishi Electric Quality

Mitsubishi Electric Quality marks over 70 years of excellence in technology, design and manufacturing, representing the highest standards of comfort, durability and efficiency.



Our quality assurance program is guided by our stringent Quality Policy, which ensures that all phases of the development process – from design and manufacture to the finished product – must meet our standards.

What it means to you is that Mitsubishi Electric simply makes the best air conditioners that you can buy today.

COMFORT	DURABILITY	EFFICIENCY		
Quiet operation	Strict performance tests	Energy saving		
Optimal temperature distribution	Easy-to-clean design	Money saving		
Clean, filtered air	Replacement parts available	Space saving		

The Mitsubishi Electric Difference

Our commitment to innovation and technology is exceeded only by our commitment to service – we stand behind every product that bears the Mitsubishi name. And we demonstrate this by offering you our 2-year parts and 6-year compressor warranty that's among the best in the industry.

Through our competent distributor network, strong service support and unmatched parts availability, it is our assurance to you that you will enjoy the comfort and true quality that only Mitsubishi Electric can offer.

Because of our high quality standards, Mitsubishi Electric will upgrade your standard (2-year parts and 6-year compressor) warranty to an extended 6-year parts and 6-year compressor warranty when your Mr. Slim M-Series system is installed by an Authorized HVAC Installer. An additional limited labour warranty may be available in some provinces from the Authorized Dealer. For more information, please contact your local Distributor or MEQ Dealer.



2000 н

Endurance test

Line test







Performance test








MITSUBISHI ELECTRIC Changes for the Better





Certificate Number 79222 Certificate Number 78649

Mitsubishi Electric Consumer Products has acquired ISO 9001 certification under Series 9000 of the International Standard Organization (ISO). The plant has also acquired environmental management system standard ISO 14001 certification.







Mitsubishi Electric Sales Canada Inc.

www.MitsubishiElectric.ca

