


ADVANCED DAYLIGHT SIMULATIONS USING ECOTECH // RADIANCE // DAYSIM


‘GETTING STARTED’



ECOTECH

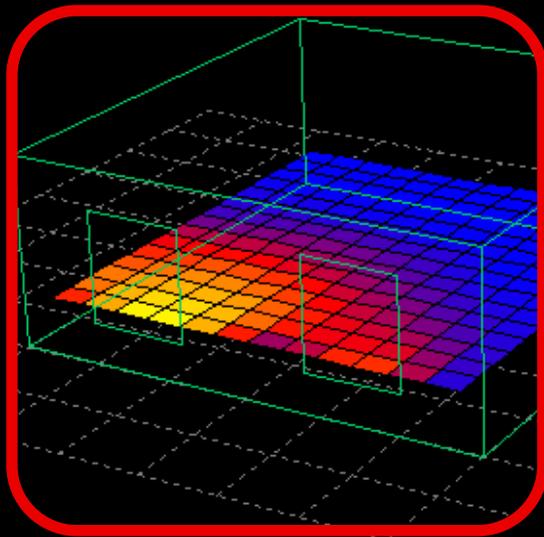

RADIANCE

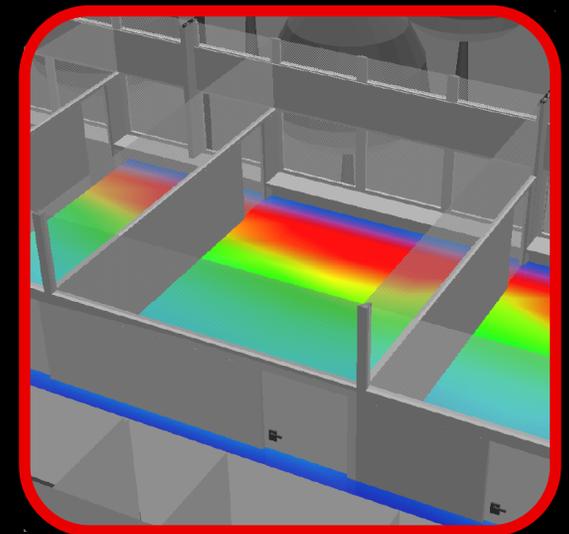

DAYSIM



McGill

GUIDO PETINELLI



National Research
Council Canada

CHRISTOPH REINHART

OVERVIEW

This document is a guide for daylight simulation beginners. At this time the daylight simulation software is not fully integrated. Therefore, we recommend using three packages, ECOTECH, RADIANCE, and DAYSIM. This document will teach you how to:

- Set up your WINDOWS™ PC;
- Build and maintain a simple model in ECOTECH;
- Visualize the same model through a physically based rendering in RADIANCE;
- Calculate annual climate-based metrics with DAYSIM.

The example to follow explores the distribution and quantity of daylight in a room sidelit with clear versus translucent glazing.

INDEX



SET-UP



ECOTECH



RADIANCE



DAYSIM

INFO

It is recommended that you work through the four sections in the order provided. Further information can be accessed through **// links //** distributed throughout the text.

SET - UP

Follow the instructions outlined bellow to set-up your computer. Make sure to pay close attention to all the steps and execute them carefully.

// ECOTECT //

You may download a FREE evaluation version of ECOTECT from the 'Square One' website <http://squ1.com/download/ecotect>

Square One requires you to provide some general information about yourself before you can download the evaluation version. Before the actual download begins you will be prompted to save the file to disk.

The file you have downloaded is a zipped archive containing the ECOTECT installation files. Save the zip file to a temporary folder on your hard disk. Unzip it and double click on the file called 'SETUP.EXE'. Follow the on-screen instructions.

SET - UP

The next step is to download and properly save the RADIANCE program on your computer. RADIANCE is a backward raytracer developed by the Lawrence Berkeley National Laboratory.

// RADIANCE //

We recommend that you download the RADIANCE FOR WINDOWS files by visiting

<http://www.arch.mcgill.ca/prof/reinhart/software/Radiance3P7forWindows.zip>

Before the download begins you will see a prompt asking you to save the file to disk.

continued //

SET - UP

// RADIANCE // continued

The file you have downloaded is a zipped archive containing the RADIANCE binaries. Save the archive to a temporary folder on your hard disk.

Unzip the archive and extract all files onto your C:\ drive. The files will be stored on your local hard drive under 'C:\RADIANCE'. You may use another local hard drive than 'C:' but in order to run properly, the path name leading to Radiance must not contains any blanks ' ' (see below).

INFO

It is very important that you save the RADIANCE files as specified above, otherwise the program will not function properly. For RADIANCE to run properly, project directories and RADIANCE header file names must not include any blanks, e.g. call your RADIANCE project "version_1" instead of "version 1".

- **Note 1:** The Desktop is **NOT** a suitable directory as it corresponds to a directory on your C: drive which has a blank.

SET - UP

// DAYSIM //

To download DAYSIM visit the website [/// www.daysim.com ///](http://www.daysim.com)

Fill out the necessary information and proceed with the download by selecting the latest DAYSIM release for Windows (e.g.)

<Download DAYSIM 2.1 (Patch2) for Windows >

To be able to import the DAYSIM results into ECOTECH, you need to work with Version 2.1P2 or higher. Before the download begins you will see a prompt asking you to save the file to disk. Save the file under your C:/ drive, in a new folder called 'DAYSIM'.

Double click on the downloaded file and follow the installation instructions. Please note that you have to install DAYSIM under C:\DAYSIM, and that the directory paths under which you store your DAYSIM projects must not include any "blank spaces".

SET - UP

The final step in setting up your computer is to download and install a material library that is suitable for lighting calculations using ECOTECT, RADIANCE, and DAYSIM. Two libraries are currently available for download. It is up to you to decide which of the two to use. Both libraries contain typical optical properties for an assortment of generic common materials such as clear and translucent glazing, floors, walls, etc. The Kalwall library also includes a set of validated RADIANCE material files for actual Kalwall products. The product specific files are based on integrated sphere measurements. Please refer to the Kalwall web site for further details.

// Materials Libraries //

You can download the library from the following URLs:

NRC: http://irc.nrc-cnrc.gc.ca/ie/lighting/daylight/daysim/docs/NRC_LightingLibrarySetup.exe

Kalwall: *(to be determined)*

Open the URL in your browser and choose 'SAVE' when prompted, then launch the file and follow the directions of the 'INSTALLATION SET-UP' wizard.


ECOTEECT

Now that you have downloaded and installed ECOTEECT and the 'Lighting Material Library', follow the steps outlined below to learn how to build a simple model and carry out daylight simulations.

At the end of this simulation you should be able to:

- Build a simple model;
- Calculate the daylight factor and typical illuminance levels.


To launch ECOTEECT, from the WINDOWS™ 'START' menu, choose 'PROGRAMS' > 'SQUARE ONE' > 'ECOTEECT'

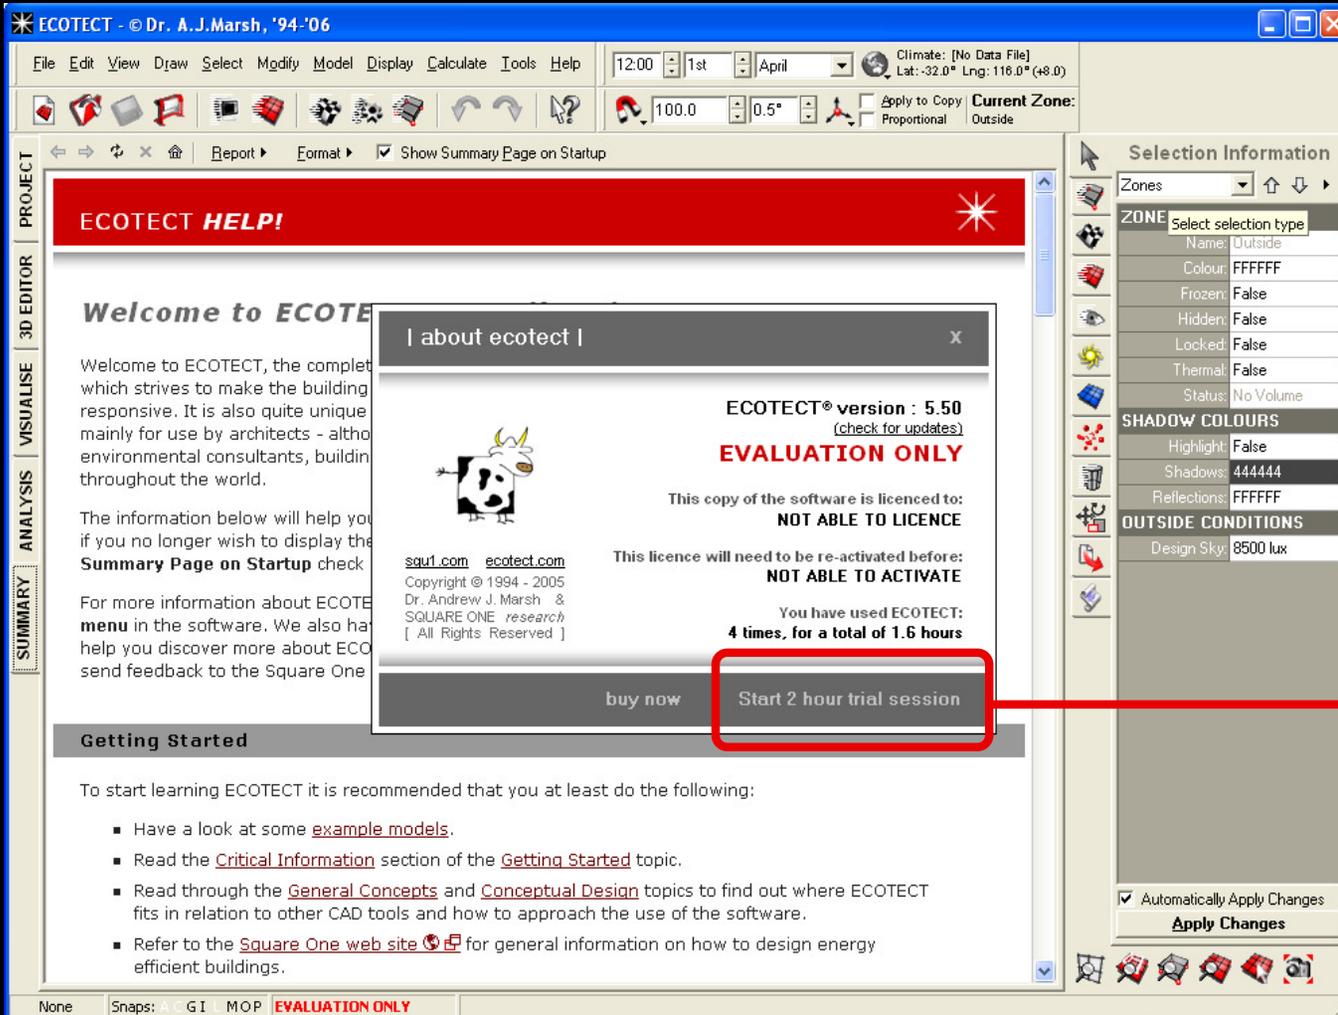

1.

If you are not using a licensed version of ECOTECT you will not be allowed to save your work.

The evaluation version will only allow you to explore all of the features of the program and visualize your results.

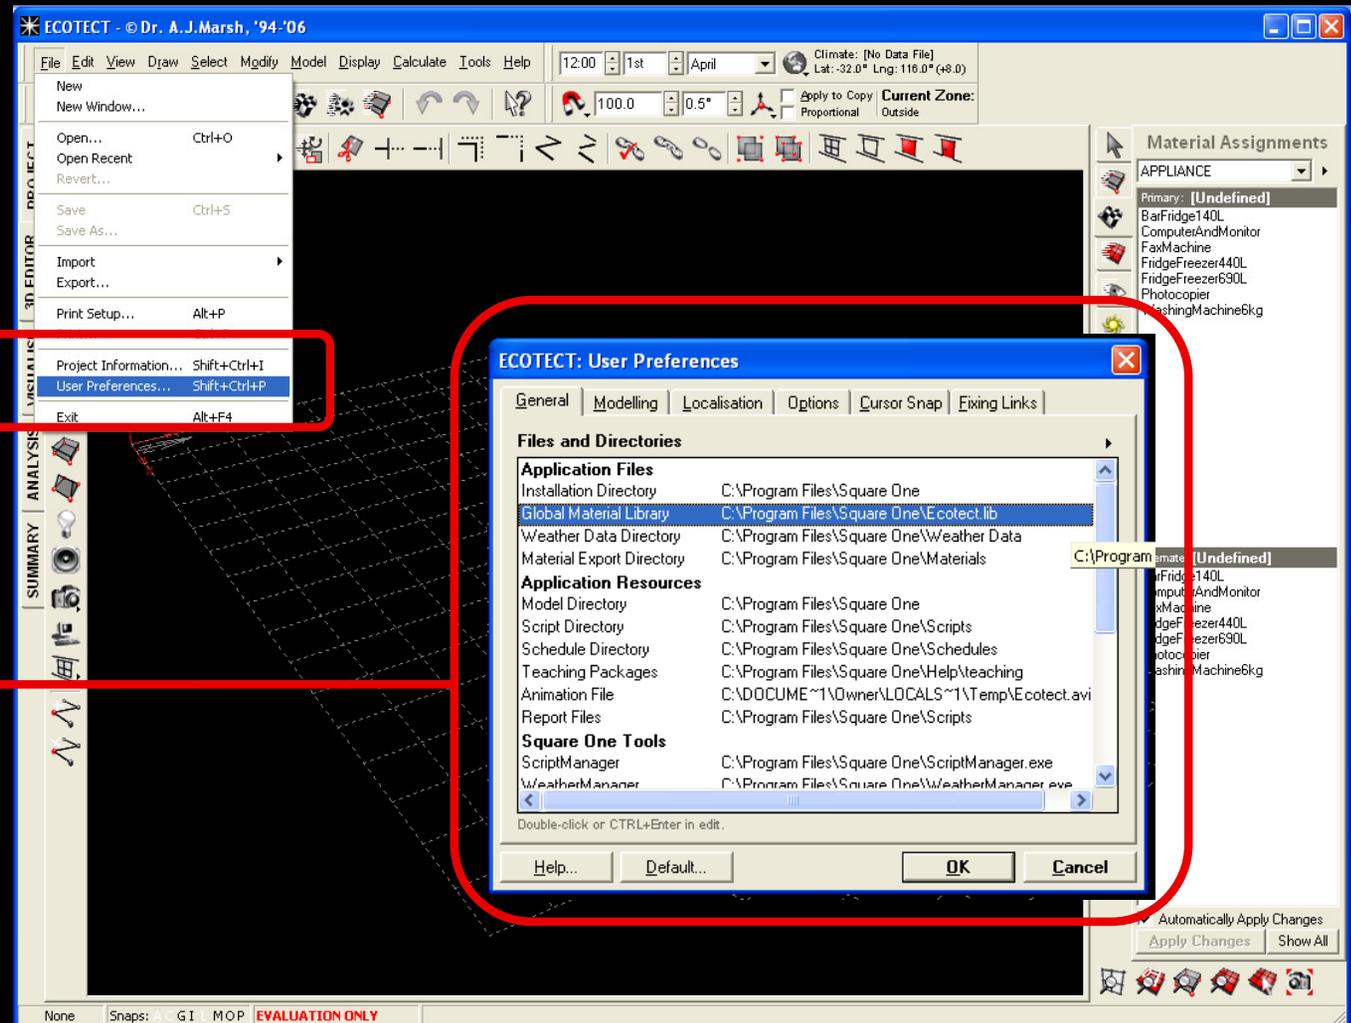

2.

Under the 'FILE' menu, choose 'User Preferences'.

3.


Double click the 'Global Material Library'.

INFO

Before you begin building your first model we recommend that you set the 'Lighting Material Library' that you have just downloaded as your default library in ECOTECT as it contains more realistic properties than the ECOTECT default library. The NRC or Kalwall libraries should reside in C:\Program Files\Square One\. The files are called either 'NRC_Lighting_Materials.lib' or 'Kalwall_Lighting_Materials.lib'. In case you do not want to use any of the two libraries, you can skip steps 4 and 5.


4.

Choose the file NRC(or Kalwall)_Lighting_Materials.lib

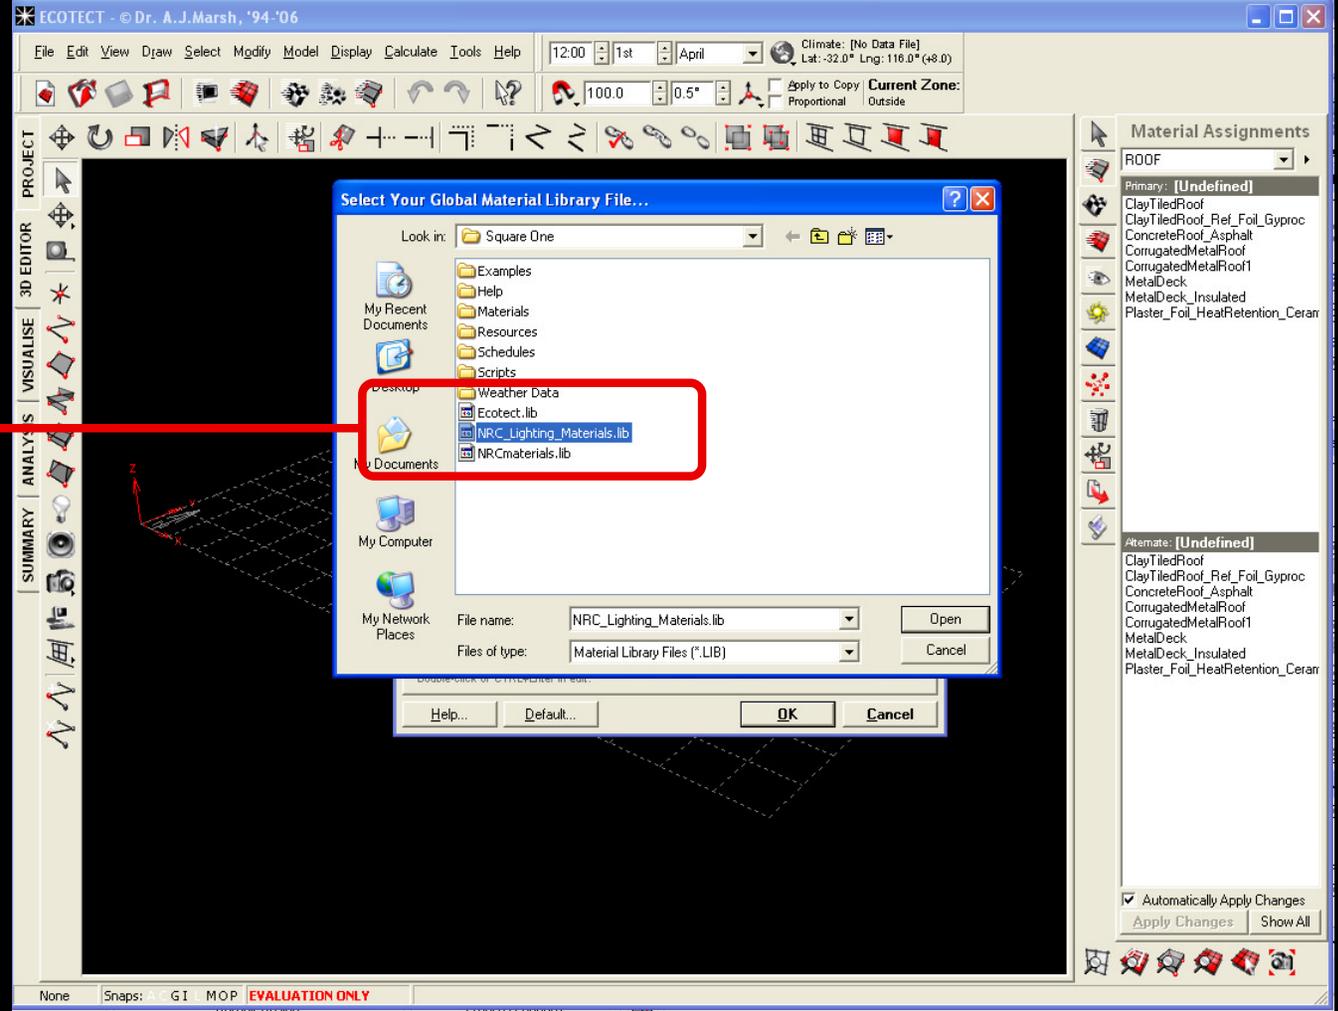

5.


With the 'Global Materials Library' set to: 'NRC(or Kalwall)_Lighting_Materials.lib' choose 'Default' and confirm that you want to set the new file as your default library.

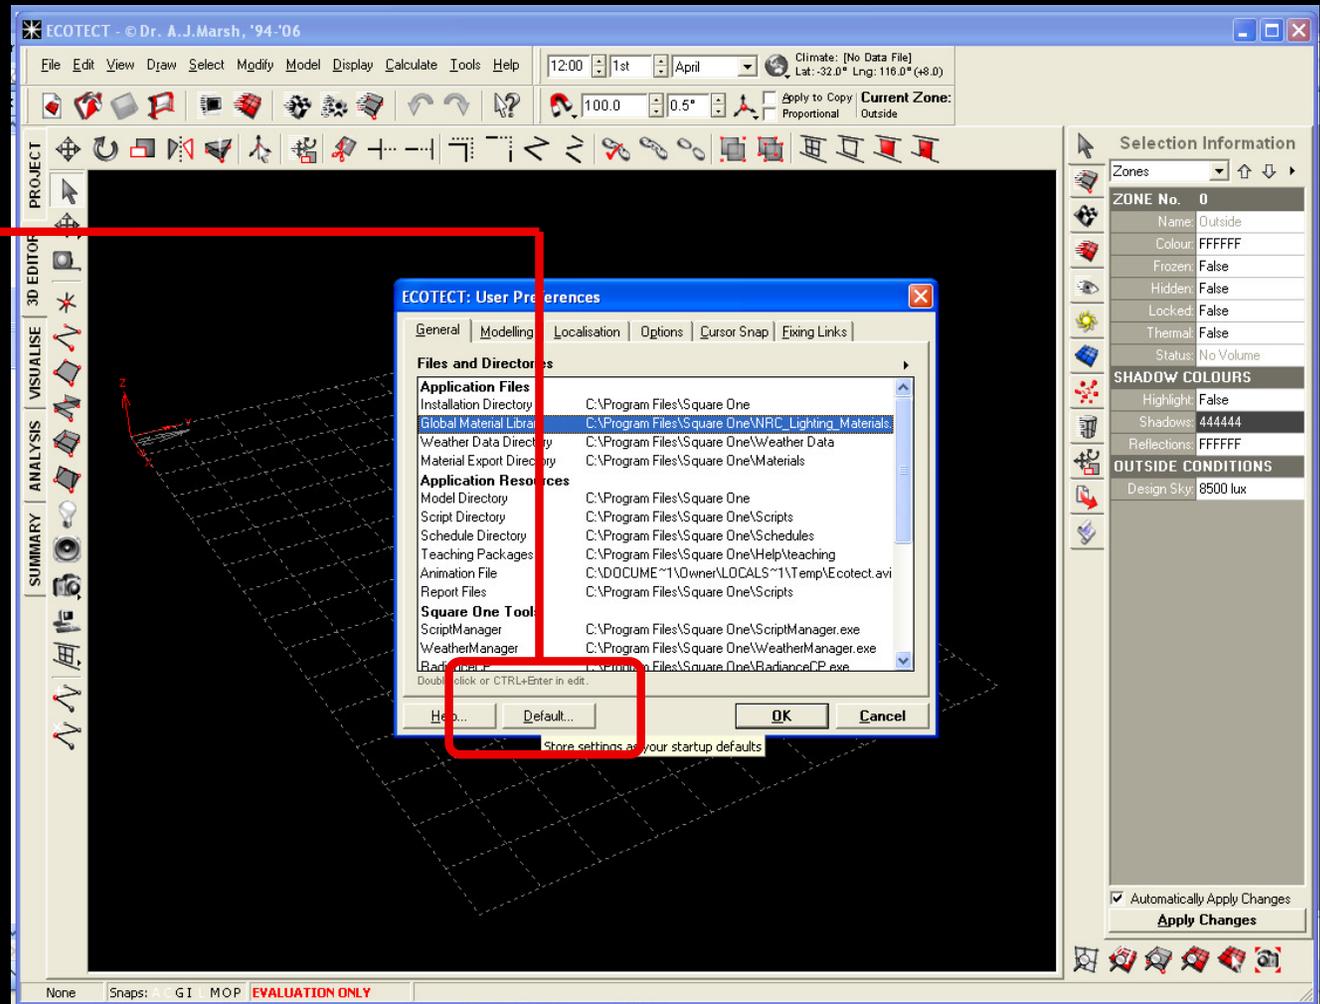

6.

To change from SI to imperial metrics, under 'User Preferences', select the 'Localization' tab, click on 'US Standard' and choose the type of dimensions you would like to use when building your model.


Confirm that you want to change your metrics by selecting 'Default'.

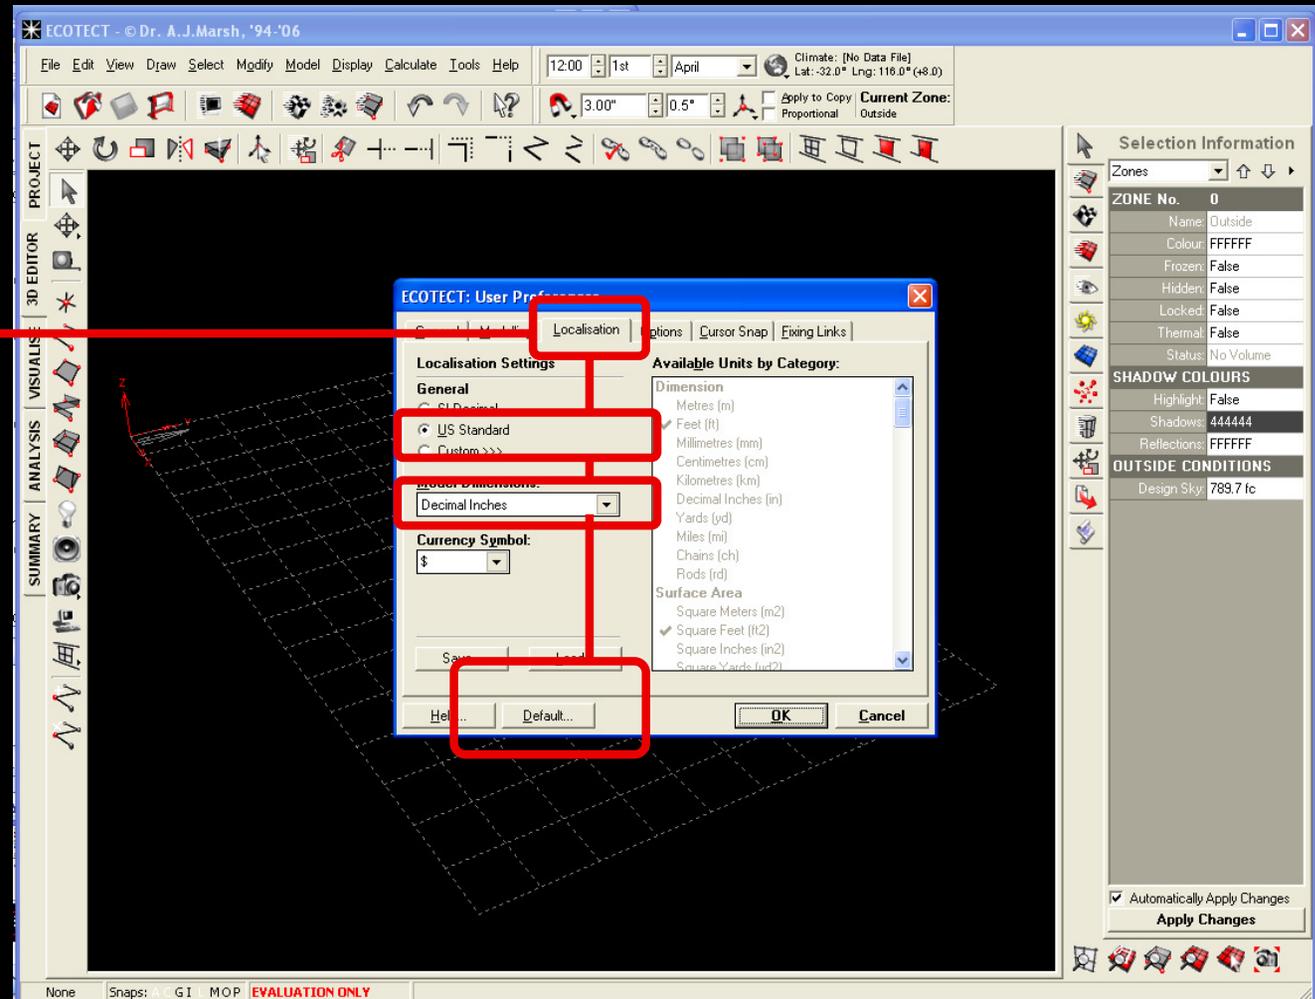

CLOSE and **RESTART** ECOTECT in order to start a new project with your new default settings.

7.

To start building your model, switch to the 3D Editor tab

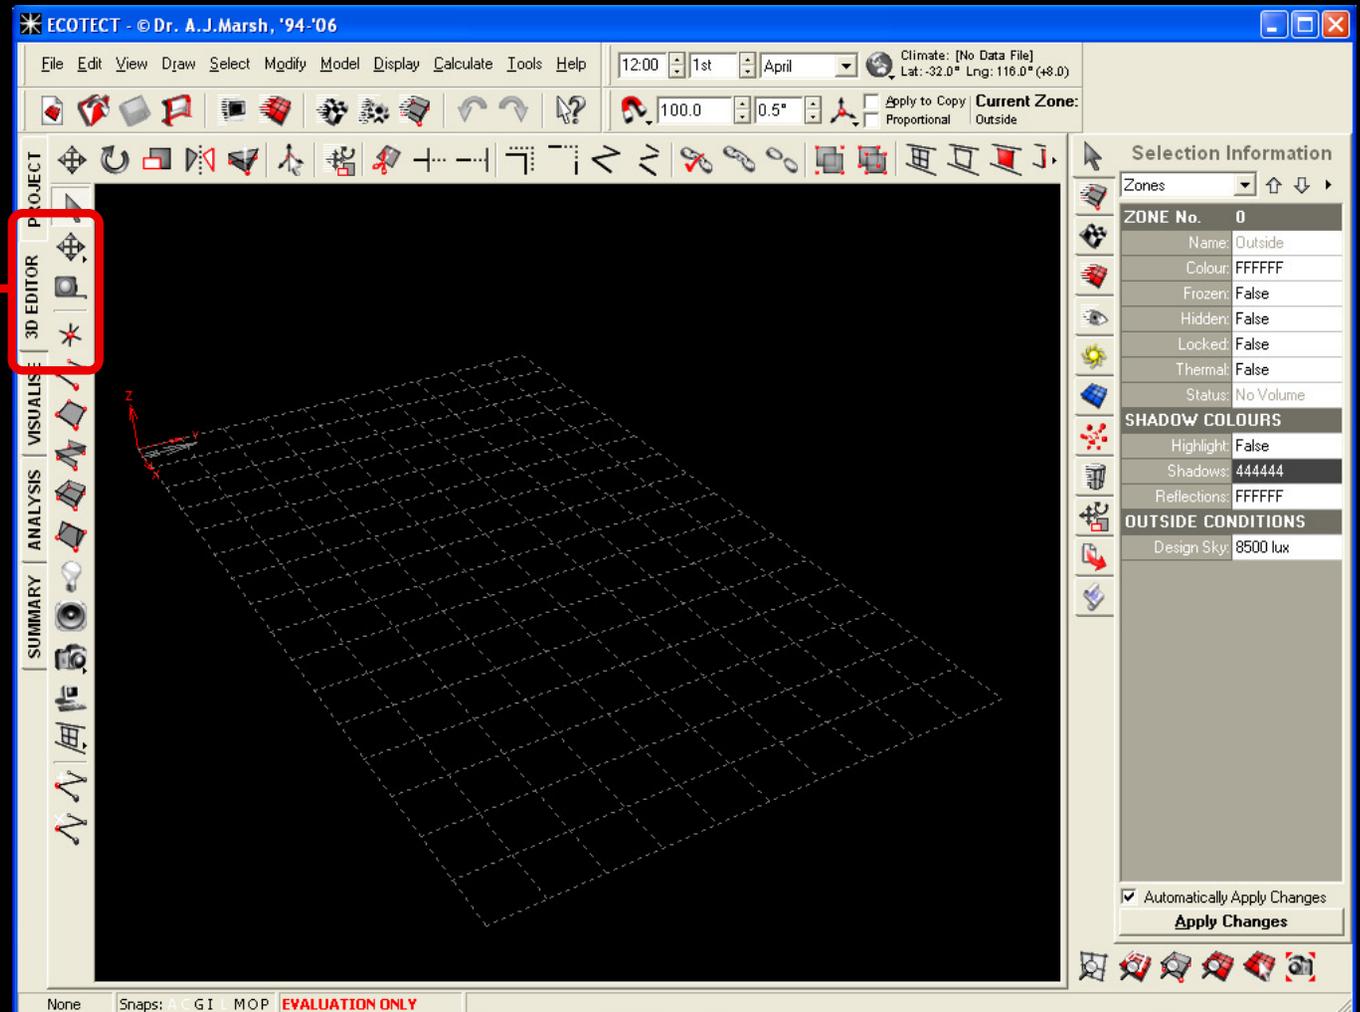


INFO

From this tab you will be able to build your model and visualize your results. Simplifying the geometry of your design as much as possible will make it easier and faster to model your building. It will also greatly decrease the computation time while still maintaining a sufficient level of accuracy.

8.

It is now time to build your first simple model in ECOTECT. Go to the 3d Editor tab and select the 'ZONE' icon.

Start by defining the first corner of the volume you wish to analyze. Continue to outline the perimeter, and press 'ESCAPE' to close the volume and establish your ZONE.

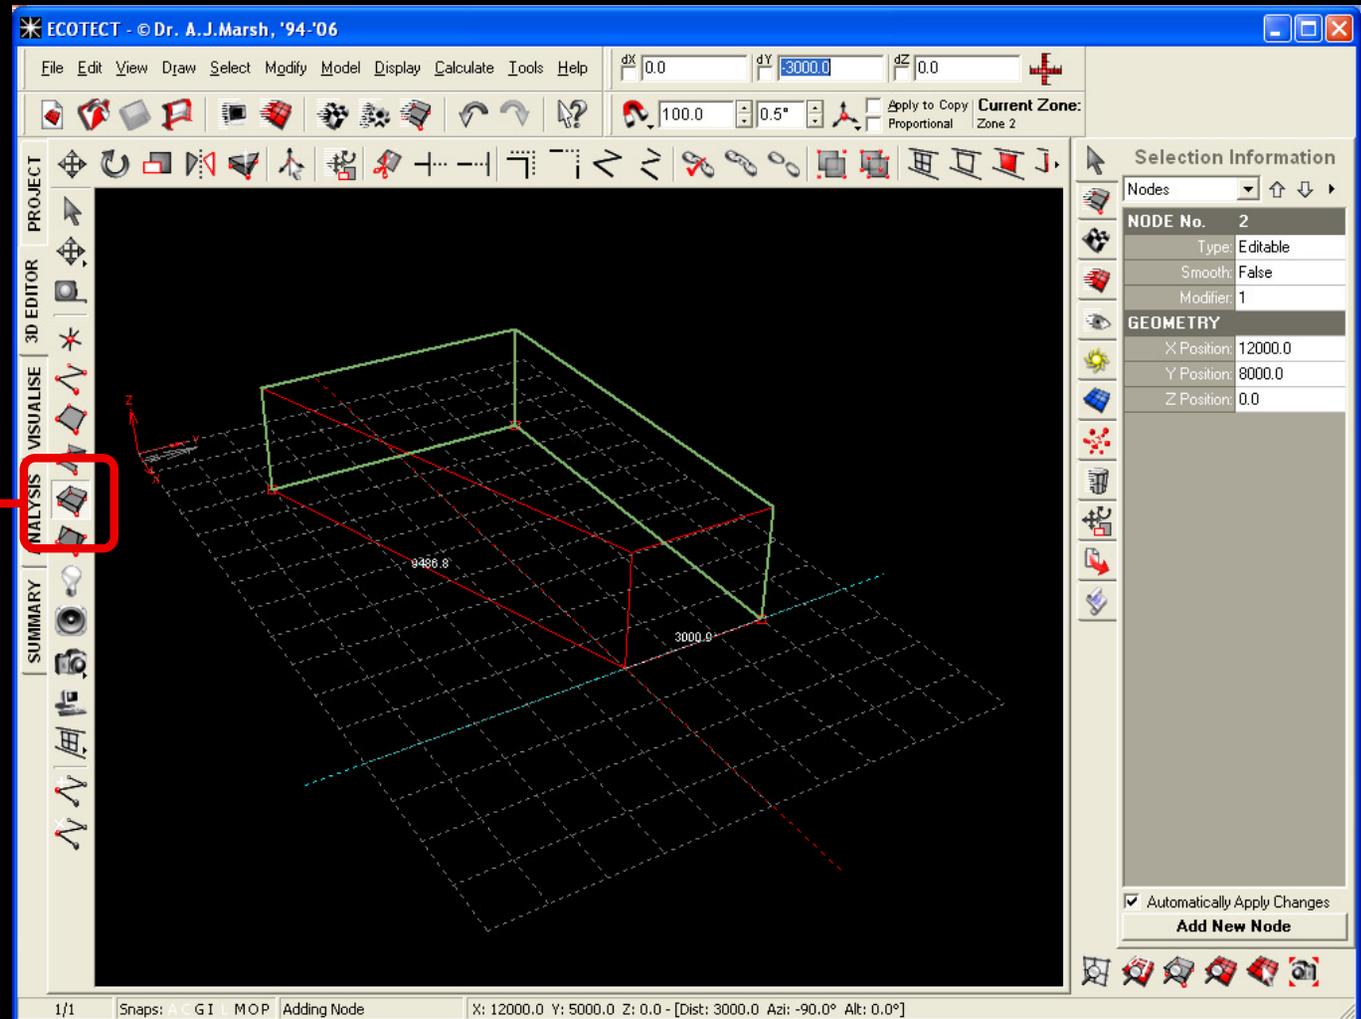


INFO


It is fairly easy to model simple volumes in ECOTECT. The program will automatically provide you with guidelines. Distances are displayed as you move your cursor. You can also input a specific distance from your keyboard.

9.

Press 'OK' to create your ZONE (you may rename it at this time).

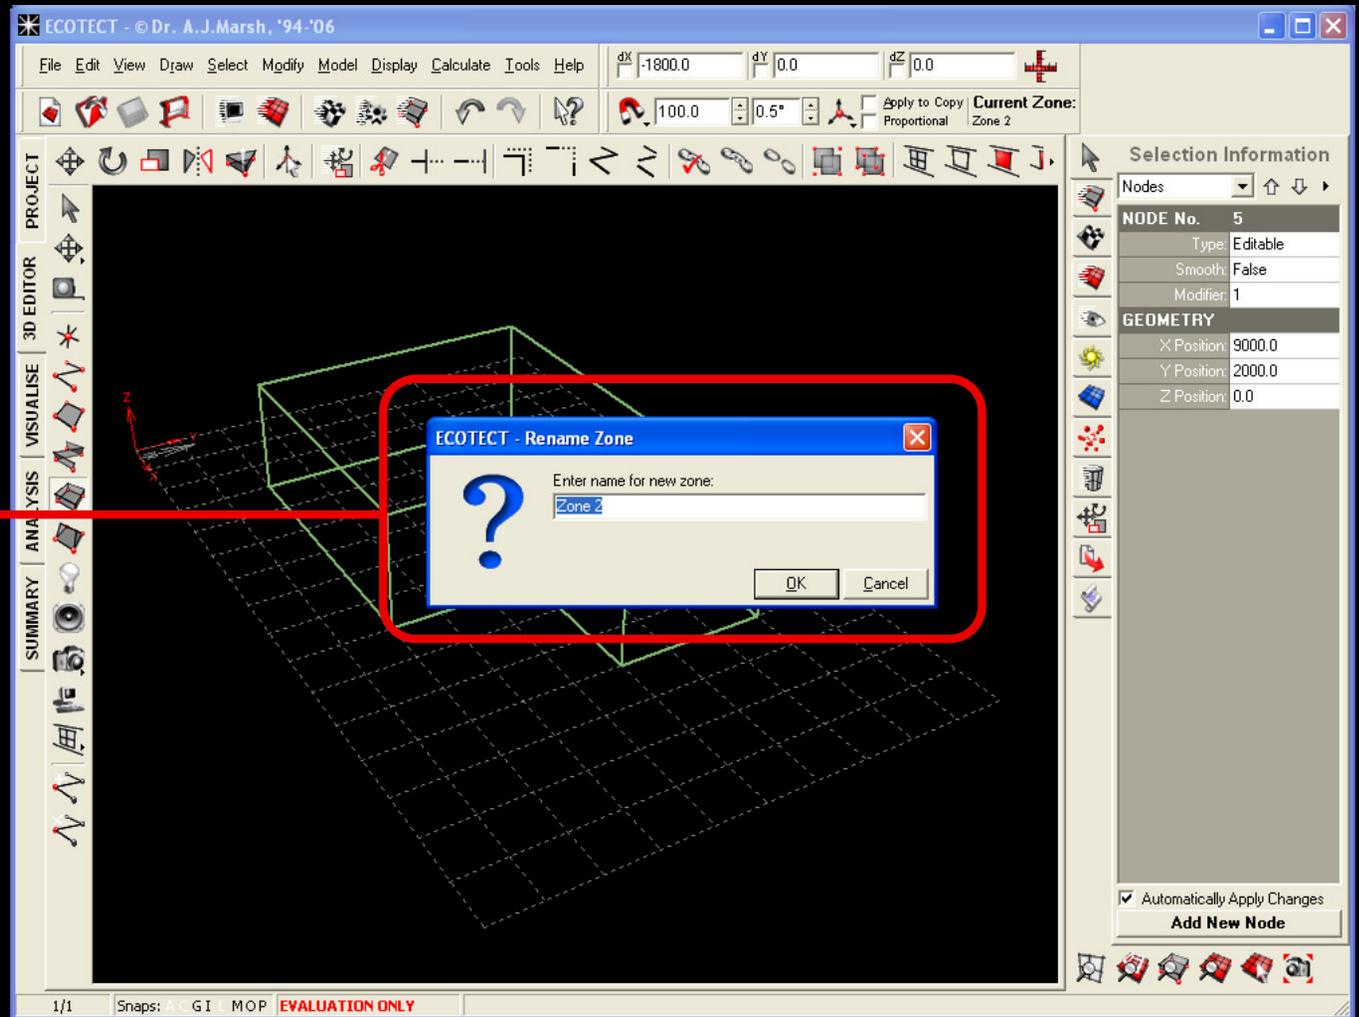

10. You might want to change the height of the ZONE (default height: 3 m). To do so, select the bottom plane of the ZONE (by clicking on one of the surface's edges) you wish to transform.

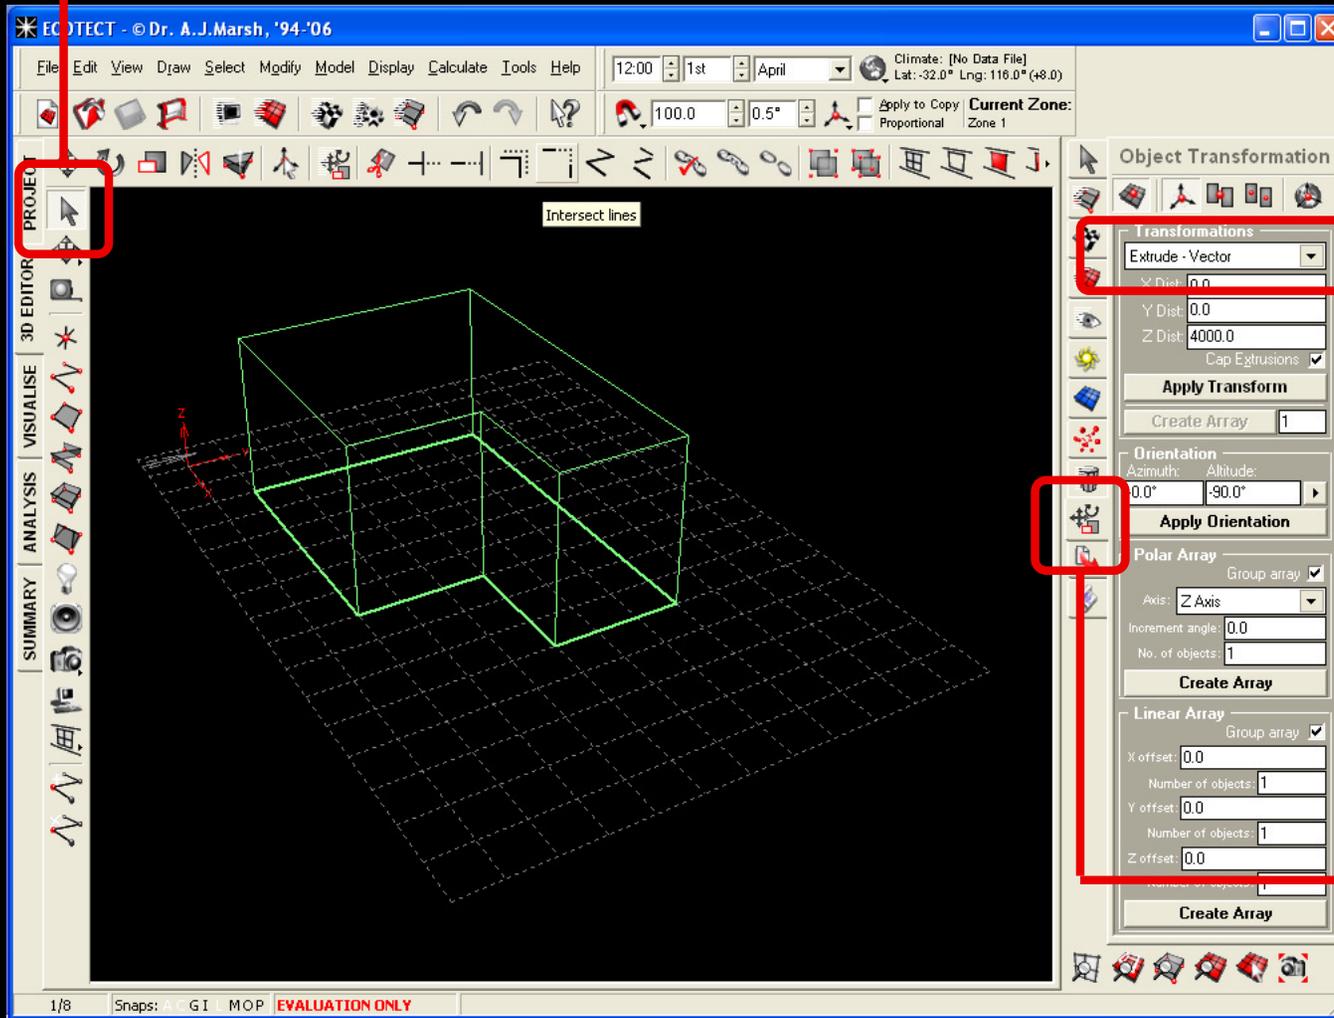

12. Choose the action you would like to perform.

To change the height of your ZONE select 'Extrude-Vector' and input the desired measurement in the 'Z dist' box (unless you choose to work with imperial units, by default units are in mm).

11. Select the 'Object Transformation Icon'.


INFO

This is a particularly useful tool, and an effective way to 'Transform' your model. Under 'Extrude - Vector' you may change the height (Z-axis), length (X-axis) and width (Y-axis). You may also choose this feature to 'Move', 'Rotate' and 'Scale' your model.


13.

It is now time to add windows or skylights to your ZONE. Click the surface you wish to add a window to.

14.

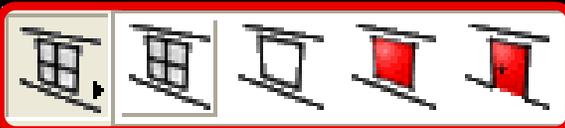


Select the WINDOW icon and draw the opening you desire.

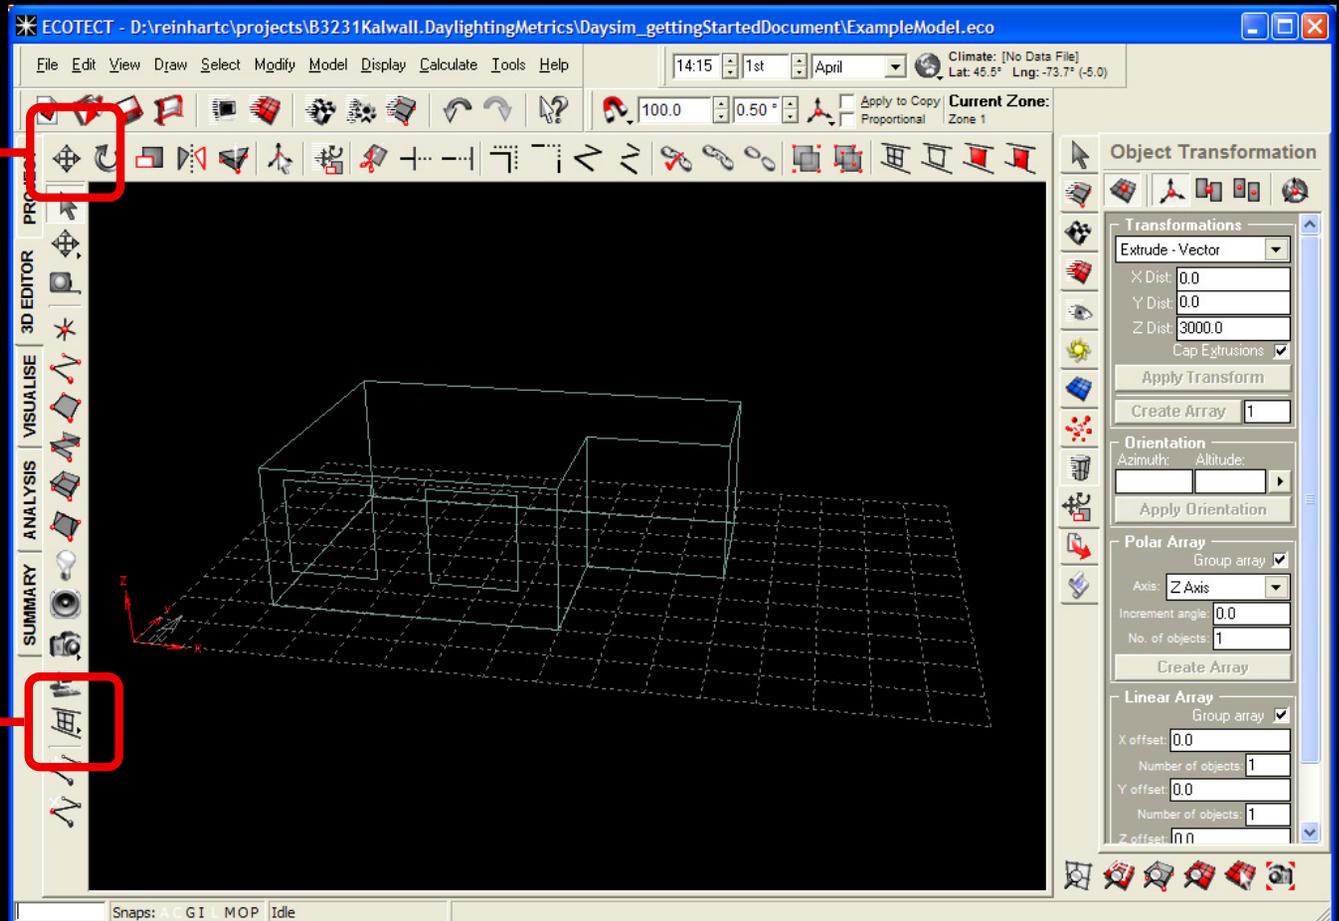

INFO

Draw two windows side by side as shown above. This will allow you to visualize the difference that the two separate types of glazing have on daylight penetration. You can move your windows by using the side menu or 'Object Transform' button.

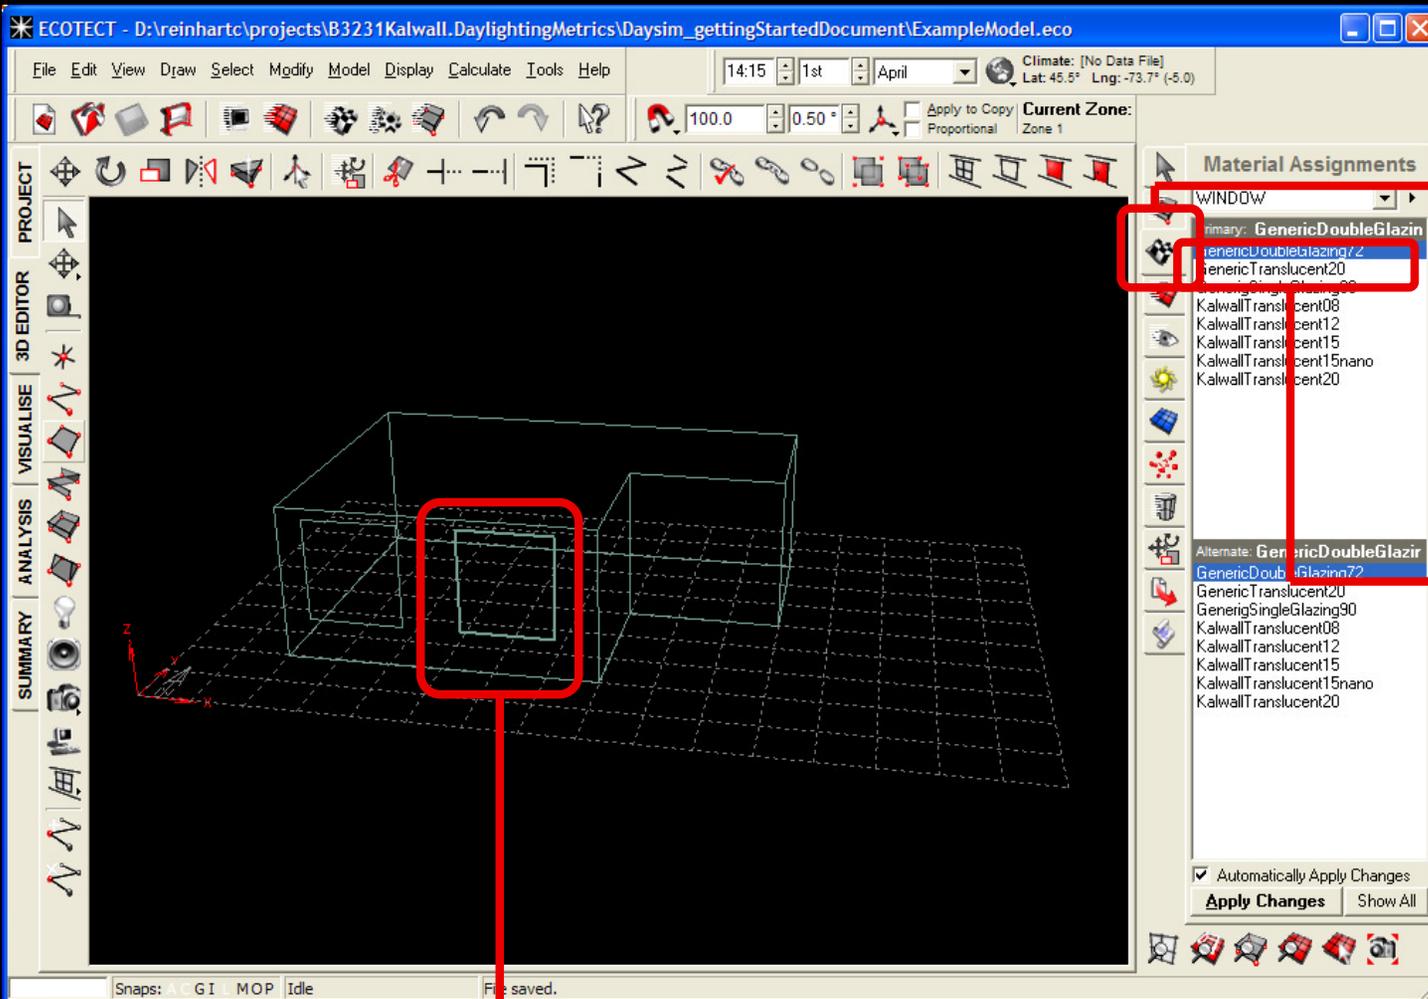

16.

Select the 'Materials Assignments' menu.

17.

Specify what materials the windows are made of by left-clicking on the desired material in the Material Assignments window.

For this exercise change one of the windows to 'GenericTranslucent20'.


15.

Select one of the windows you have just drawn by clicking on one of its edges.

INFO

With the above material selections for the two windows you will compare the daylight distribution of a clear double glazing (default glazing type, visual transmittance of 72%) with that of a translucent window with a visual transmittance of 20%. Using this material selection will prompt ECOTECT to use the RADIANCE material files that you installed earlier on your computer when exporting to RADIANCE and/or DAYSIM (Steps 33 and 43).

18. You now need to specify a grid of sensor points for your daylight simulations. Select the floor plane of your Zone by clicking on it.

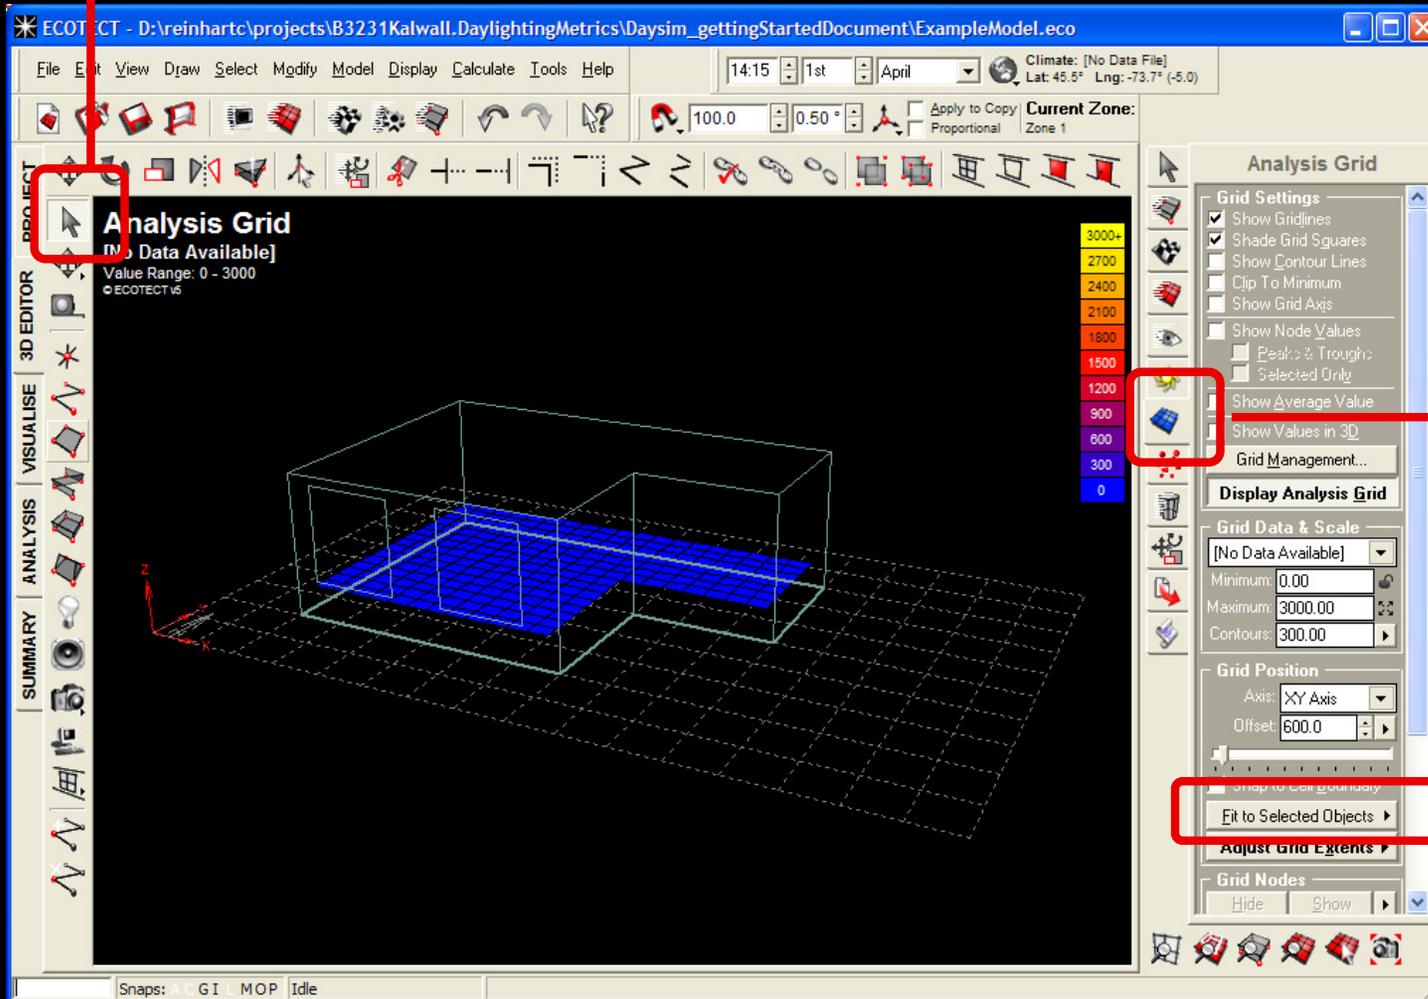

19.


Select the 'Analysis Grid' menu to start visualizing your grid.

20.

Click on 'Fit to Selected Objects', then on 'Fit grid on current axis (2D)' and the analysis grid shown in blue will appear.

INFO

The analysis grid defines the position and orientation of all 'virtual sensors' within the space for which ECOTECT and DAYSIM will calculate daylighting metrics. It is customary to define a grid of sensor points located between 600 mm and 850 mm above the floor.

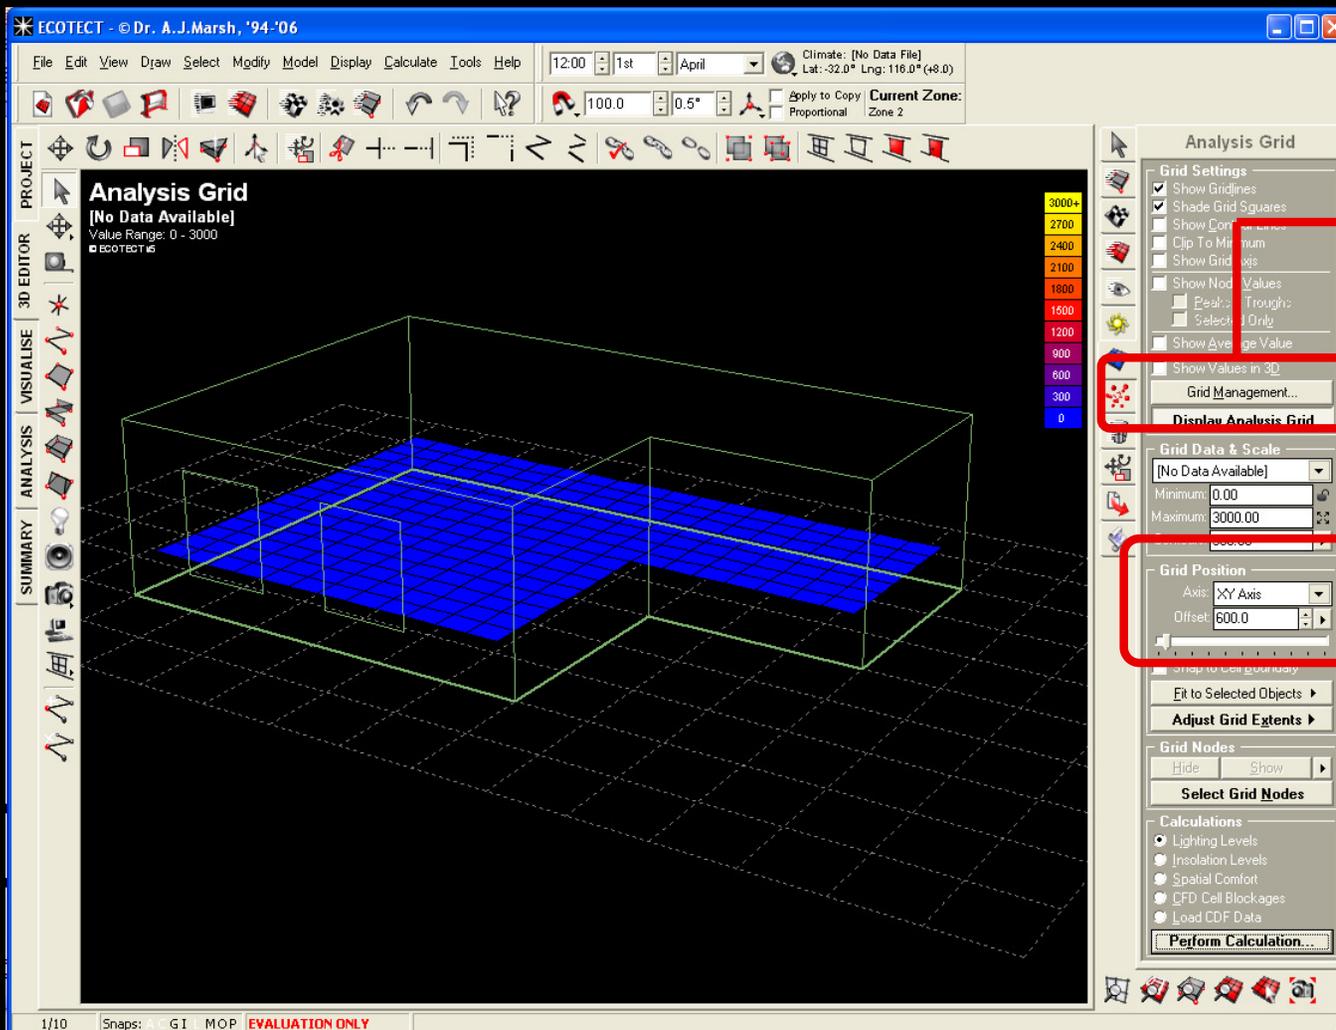

21.


The 'Grid Management' button will allow you to change the number of cells in the analysis grid.

22.

The 'Grid Position' establishes the height of the analysis grid above the bottom plane.

INFO

The larger the number of cells in the analysis grid, the more accurate your results will be. However, the computation time will increase as well. It is important to strike an appropriate balance.

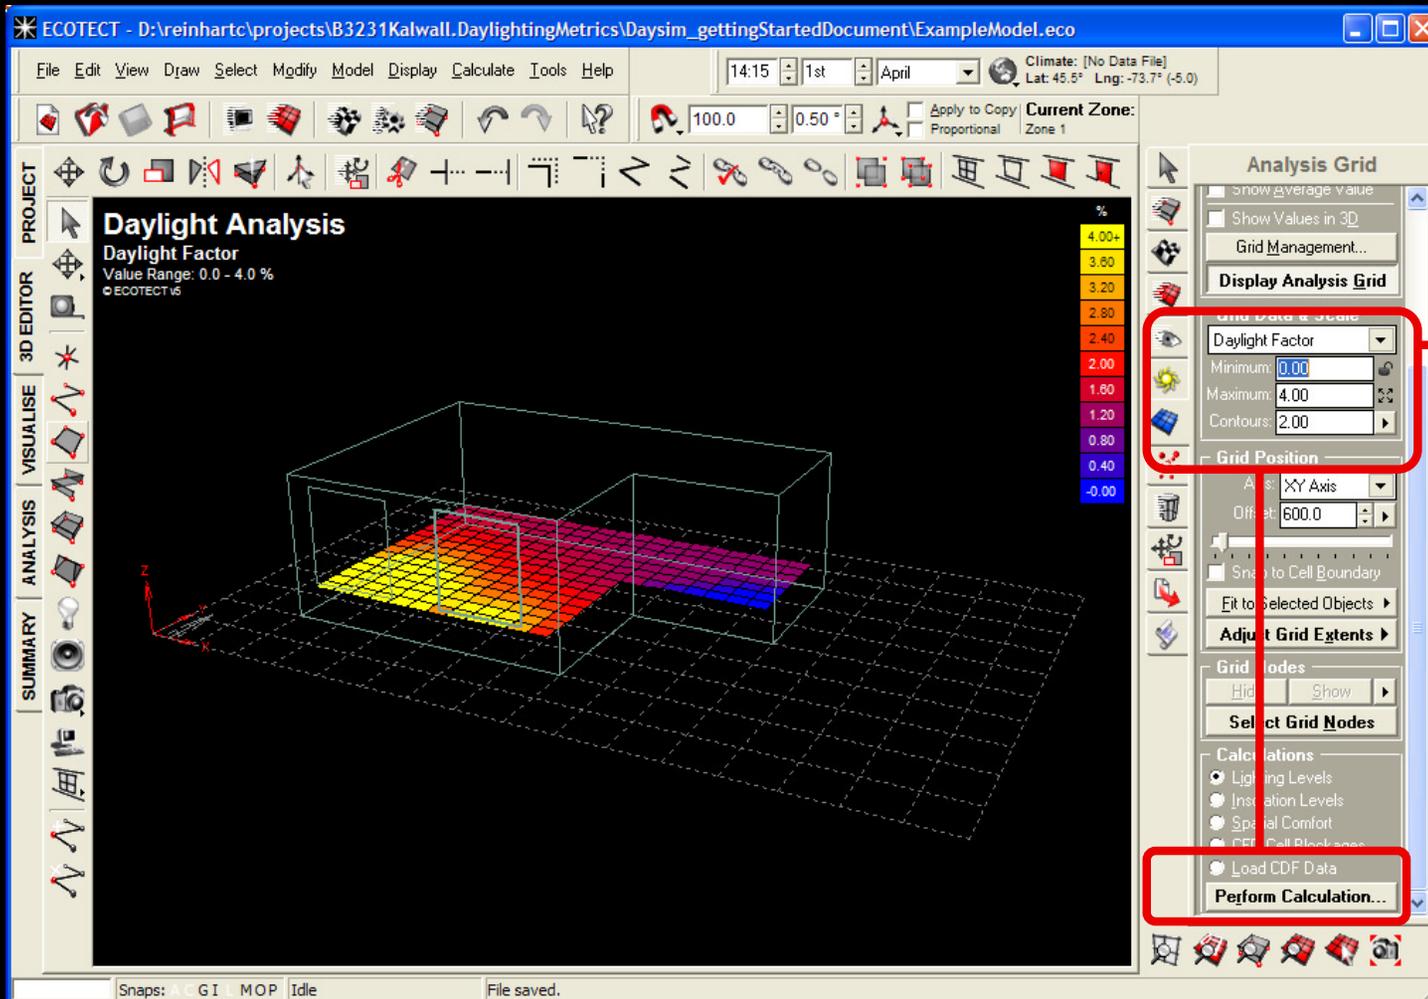






23.

Choose the data you wish to visualize (i.e. Daylight Factor or Daylight Levels).

Click on 'Perform Calculations' to obtain results.

INFO

The *Daylight Factor* is the ratio of the illuminance within a building divided by the illuminance at an unshaded point outside the building under an overcast 'CIE' sky. It is a popular performance metric to quantify the daylighting within a space. In order to provide typical illuminances reached within the building, *Daylighting Levels* within ECOTECT correspond to the Daylight Factor multiplied with the 'Design Sky' illuminance (see ECOTECT help pages...).

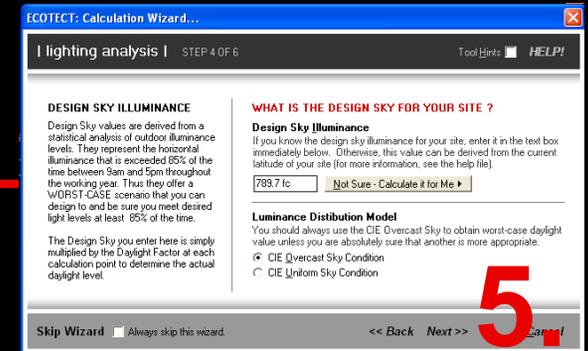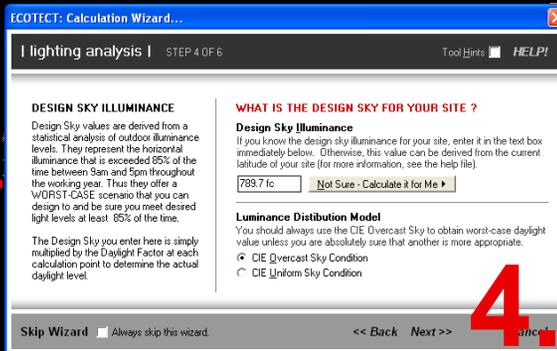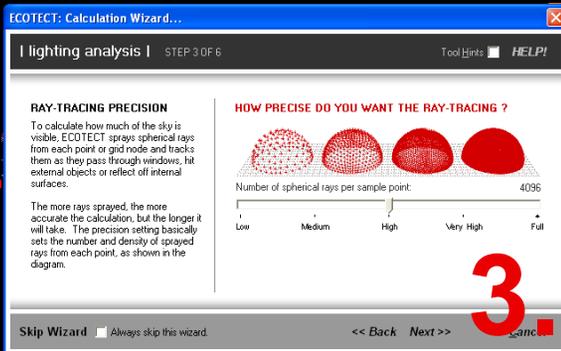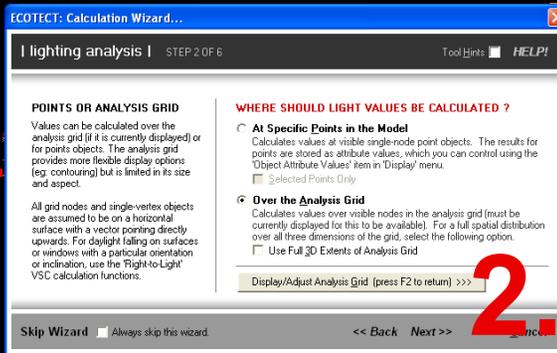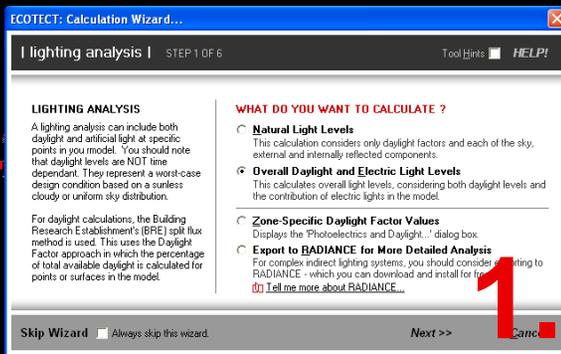


24.

When you first run ECOTECT the simulation wizard for the lighting calculations and RADIANCE are enabled.



You should always pick the 'Default Settings'.

Select 'Always skip this wizard' to turn off the wizard in the future.

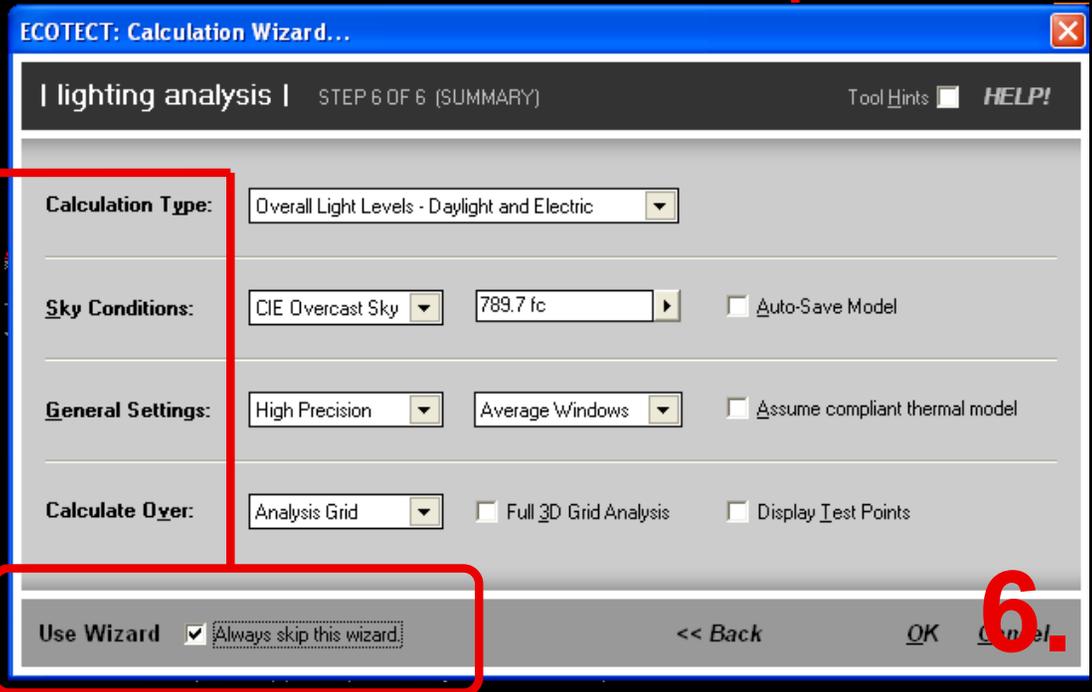

25.a

Your results should be similar to this. Note that the window on the right (translucent panel) has a lower visual transmission than the clear double glazing (20% compared to 72% see material properties).

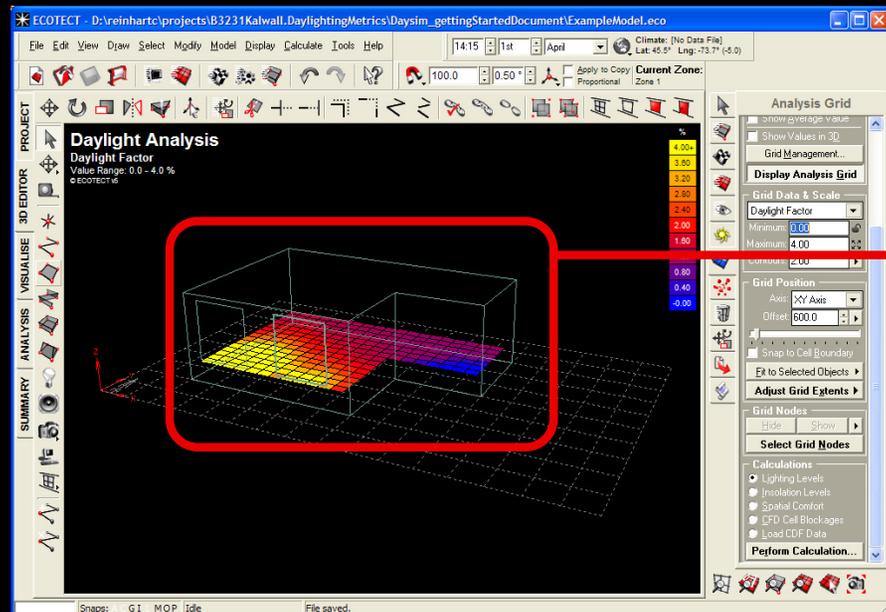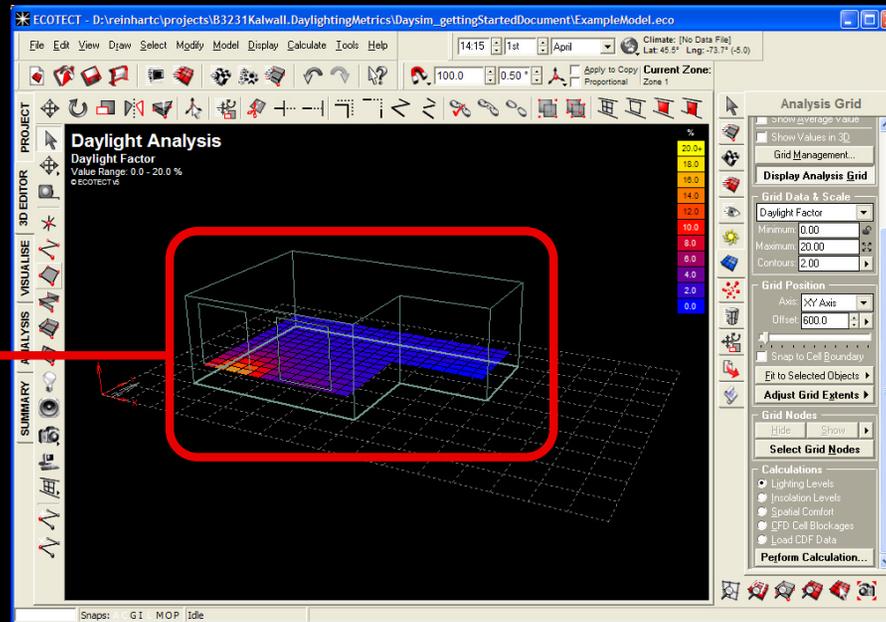

25.b

In order to find out what the daylight factor results might 'mean', it is advisable to set the falsecolor minimum and maximum levels to 0% and 4% respectively.

INFO

Assuming a target daylight factor level of 2% (red area in 25.b), the calculations show that the size of the 'daylit' areas adjacent to the clear and the translucent glazing are comparable.

RADIANCE

In the preceding section you have used ECOTECH to calculate Daylight Factors and Illuminances. Now you will use RADIANCE to visualize what your design will look like. At the end of this simulation you will be able to:

- Generate a photorealistic rendering of your model;
- Display your results in falsecolor mode for further analysis.

You will run RADIANCE through the 'Radiance Control Panel' that comes with ECOTECH.


INFO

`///RADIANCE///` RADIANCE is a validated, 'physically-based' backward raytracer that provides more reliable results than the split-flux method used by ECOTECH for daylight factor calculations.

26.

Set the time and location of your project. Click on the icon to load a weather file.

version: 11/22/2006

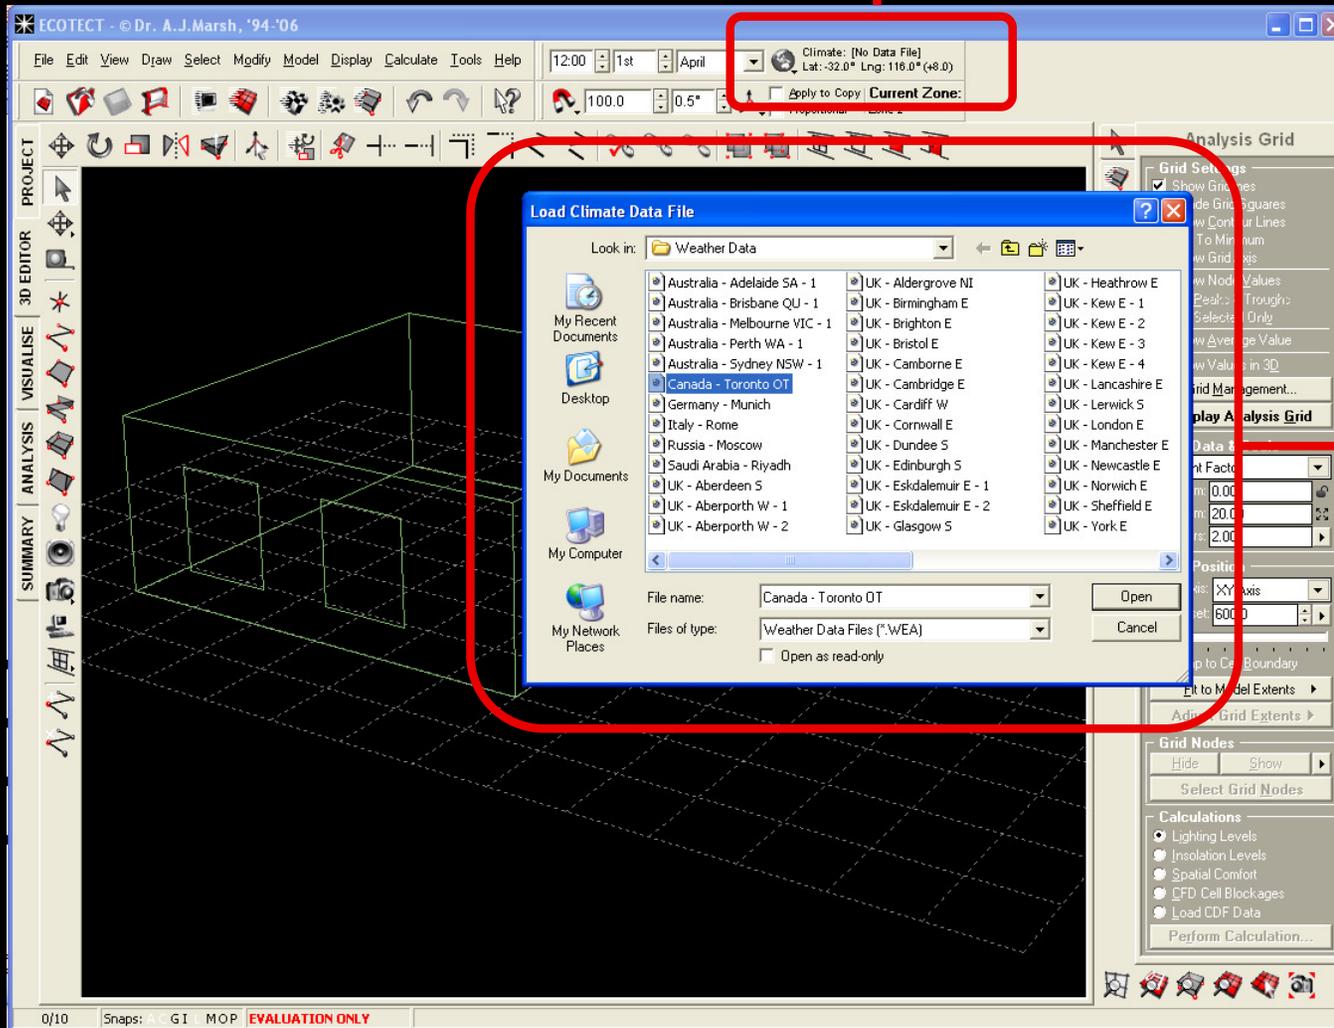

27.



Choose the most appropriate location for your project. For this example choose Toronto, Canada.

INFO

So far you have used ECOTECT to calculate the Daylight Factor for your space. The Daylight Factor is a 'static' daylight performance metric that is independent of the building location. When using RADIANCE and DAYSIM you will calculate performance metrics that take the local climate into account. E.g. RADIANCE considers the building site when calculating actual sun positions at key times during the year. DAYSIM further uses annual climate data for the building site to calculate dynamic, climate-based daylight performance metrics.

28.

Select the 'Camera' icon > 'INTERACTIVELY' and set it up in the direction of the view you want to capture. You will most likely have to raise the camera (move along the Z-axis). Just use the 'Object Transformation' menu > 'MOVE' > and input an appropriate value. For this exercise enter 1700 mm along the Z-axis. You also have to make sure that your view origin is located inside the building and does not lie on a surface. Pick a view origin and direction similar to the one on the right.

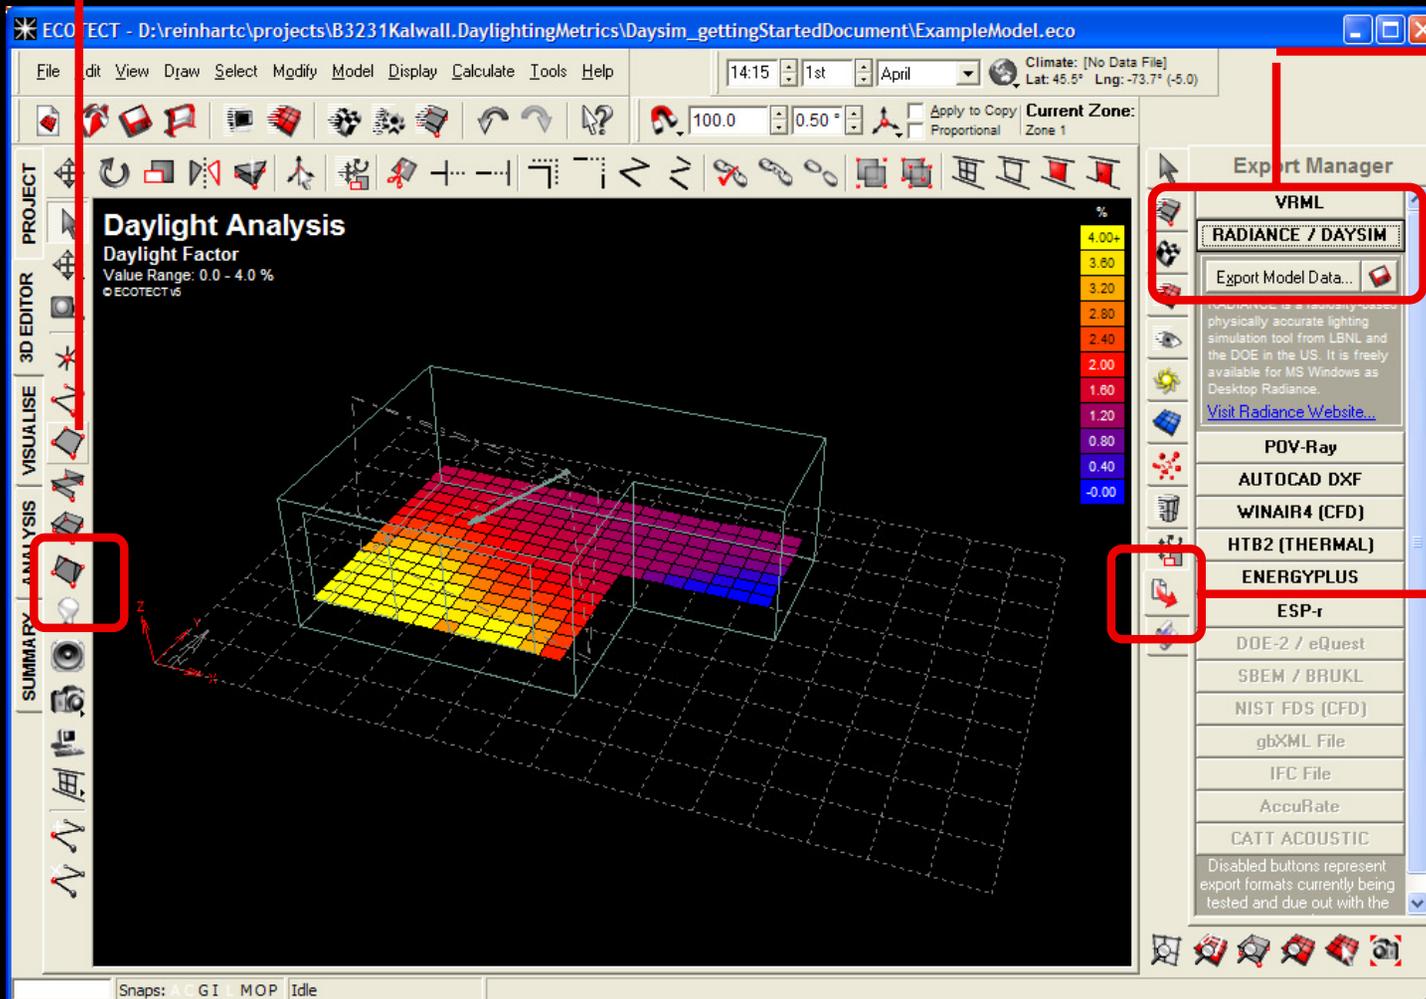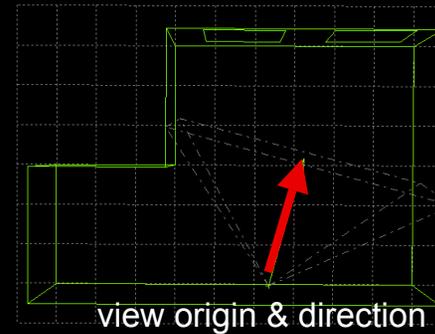

30.

Click on the 'RADIANCE/DAYSIM' button and export your model data.

29.

Select the 'Export Manager' menu.

radiance analysis | STEP 1 OF 9

RADIANCE / DAYSIM IMAGES

RADIANCE is a freely-available lighting simulation tool that can produce physically accurate images of both daylight and artificially lit scenes.

DAYSIM is for daylight availability analysis and calculating energy savings from the use of automated lighting controls and occupancy sensors.

To use either tool, you will need to have already downloaded and installed it on your machine.

[Visit Desktop Radiance Website...](#)
[Visit DAYSIM Website...](#)

WHAT KIND OF IMAGE TO GENERATE ?

- Luminance Image (cd/m2)**
Image is based on the amount of light REFLECTED OFF each surface in the scene, exactly the same as a camera sees.
- Illuminance Image (Lux)**
Image shows the amount of light FALLING ON each surface. This is a purely analytical image showing Lux levels.
- Daylight Factors (%DF)**
Sets the horizontal sky illuminance to exactly 100 Lux, generating an illuminance image at noon in mid-winter. The result is the worst-case percentage of available daylight on each surface in the scene.
- Sky Components (%SC)**
Same as daylight factor, except that ALL materials are output as matte black to ensure only direct light from the sky is counted. For a vertical surface, this corresponds to the BRE Vertical Sky Component.

Skip Wizard Always skip this wizard. **Next >>**

1

radiance analysis | STEP 2 OF 9

PRESENTATION OF RESULTS

Most of the time you will want to use Radiance to generate final images. However, if you are checking your model, it is sometimes useful to generate a much quicker interactive render to see how it looks. The interactive render is much lower quality than a final render.

Alternatively, you may want Radiance to calculate values for objects or grid cells and then read them back into ECOTECT. For more advanced users, the Radiance Control Panel offers the ultimate flexibility.

HOW TO PRESENT THE LIGHTING ANALYSIS ?

- Equal Render**
Generates fully rendered high quality images.
 Use old IRRADIANCE viewer
- Interactive Render**
Displays a lower quality rendered image in real time as it progresses.
- Open Radiance Control Panel**
Displays the specified scene files in an external viewer that allows you to view or change the scene code.
- Surface and/or Point Analysis**
Calculates and stores levels at specific points in the scene, which are then read back in as object attributes or grid points.

Skip Wizard Always skip this wizard. **<< Back** **Next >>** **Cancel**

2

radiance analysis | STEP 3 OF 9

MODEL OBJECTS OR GRID

Values can be calculated over the analysis grid if it is currently displayed on the object in the model. The analysis grid provides more flexible display options (eg contouring) but is limited in size and speed.

To see analysis over the surface of a large object, you might consider breaking it up into smaller sections using the Surface Subdivision menu in the Modify menu.

WHAT SHOULD VALUES BE CALCULATED FOR ?

- Objects in Model**
Stores results as object attributes. You can control these using the Object Attributes Values menu in the Modify menu. Use the following to limit the objects for which the calculation is performed.
 Use Only Objects Displayed
 Use Only Selected Objects
- Analysis Grid**
Calculates values over visible points in the analysis grid (must be currently displayed for this to be available). For a full spatial distribution over all three dimensions of the grid, select:
 Use Full 3D Extents of Analysis Grid

Display/Modify Analysis Grid (press F2 to return)

Skip Wizard Always skip this wizard. **<< Back** **Next >>** **Cancel**

3

radiance analysis | STEP 4 OF 9

LUMINANCE DISTRIBUTION

The distribution of light over the sky dome can change quite dramatically even within the space of a few minutes, mainly due to the formation of clouds. Thus, rather than try to accurately simulate any specific sky condition, representative sky models are used.

Each type of sky is intended to be typical of a particular design condition. For example, on a typical summer day the sky is likely to be clear and bright so a Sunny Sky should be used. On a winter day, the sky is more likely to be overcast so a cloudy sky should be used.

WHAT SKY CONDITION SHOULD BE USED ?

- No Sky**
This sky is required. Used for nighttime and artificially lit spaces.
- Sunny Sky (Summer)**
Uses the CE Clear Sky model to generate a localized Sun and clear blue sky to represent a clear case summer design condition.
- Intermediate Sky (Mid-Season)**
Uses a sky that may represent sunny and overcast states, intended as representative of a mid-season design condition.
- Cloudy Sky (Winter)**
Uses the CE Overcast Sky model to generate a fully clouded over sky as a worst-case winter design condition.
- Uniform Sky**
Assumes that light is distributed evenly over the entire sky dome.

Skip Wizard Always skip this wizard. **<< Back** **Next >>** **Cancel**

4

radiance analysis | STEP 5 OF 9

DATE AND TIME

Radiance uses the latitude, longitude and timezone of the site as well as the current date and time to calculate basic properties of the sky. (Optional for a sunny day) to determine the position of the Sun. However, even for a cloudy day the date and time will affect the overall sky brightness.

The 'Current Date and Time' option refers to the date/time currently displayed in the toolbar at the top of the main application window.

GENERATE LEVELS AT WHICH DATE/TIME ?

- Use Current Date and Time**
Calculate levels at the current model date and time, as set in the Date/Time toolbar in the main application window.
- At Specified Date and Time**
Uses the date and time specified below for the calculation. NOTE: This will also change the current date/time in ECOTECT.
- Use ECOTECT's Sun Angles and Design Conditions**
Sets the exact solar azimuth and altitude based on the current Sun position. The sky luminance is set to the currently assigned to the Outside zone.

Skip Wizard Always skip this wizard. **<< Back** **Next >>** **Cancel**

5

radiance analysis | STEP 6 OF 9

AMBIENT LIGHT LEVELS

To accommodate ambient light levels, Radiance requires some level of background illuminance in most scenes. To calculate the level automatically, adding much more if it knows that the scene is outside under sky conditions.

Thus, you will need to select how whether the scenes you are about to render are interior or exterior.

NOTE: The setting applies to all of the views to be rendered.

WHAT TYPE AND NUMBER OF VIEWS ?

Type of View:
Select an ambient view if the camera is outside the model looking at external surfaces. Otherwise choose interior.
 Exterior Side
 Interior Side

Location of View:
Views can be generated for every camera object in the current scene. If you have no cameras, the current 3D Editor view can be used.
 Include Current Model View
 Include All Camera Views

Image Size:
Select the width and height of the image(s) to be generated.
[540 x 630 pixels]

Skip Wizard Always skip this wizard. **<< Back** **Next >>** **Cancel**

6

radiance analysis | STEP 7 OF 9

CALCULATION ACCURACY

As with most calculations, the more accurate you want the Radiance analysis, the longer it will take. If you set the accuracy too low, you will end up with very spotty images and questionable results. Test high and you will be waiting around for a result. Unfortunately, even low image values, you will simply have to experiment.

NOTE: The values here are all inter-related. Setting any one of the parameters to low will have an overall effect on image quality.

HOW ACCURATE DO YOU WANT TO BE ?

Model Detail
A very detailed model needs a high setting so that test points are spaced to accommodate even the smallest of objects.
 LOW MEDIUM HIGH

Lighting Variability
How much the lighting distribution is likely to change over each surface. In an artificially lit space probably not much. In a dark space, probably a lot.
 LOW MEDIUM HIGH

Image Quality
Radiance increases the quality of an image subject, 2x2 to medium and 3,2 to high.
 LOW MEDIUM HIGH

Skip Wizard Always skip this wizard. **<< Back** **Next >>** **Cancel**

7

radiance analysis | STEP 8 OF 9

SAVING TO RADIANCE

When exporting to Radiance, a number of different files will be created - each with the same name and in the same directory as the file displayed in the edit box to the right.

Radiance is a separate program written at Lawrence Berkeley Laboratories in the U.S. To link with it, ECOTECT needs to know exactly where Radiance is installed on your system. You should check for errors in the list and attempt to fix them before continuing.

SELECT OUTPUT FILE AND CHECK INSTALLATION...

C:\temp\test4\test4

Fix

Checking Radiance directory...

- ✓ C:\Radiance\bin\rad.exe
- ✓ C:\Radiance\bin\Accom.exe
- ✓ C:\Radiance\bin\rvview.exe
- ✓ C:\Radiance\lib\rayinit.cal

Checking System Registry...

Searching 'SOFTWARE\Lawrence Berkeley National Laboratory\Radian...

- ✓ HKEY_LOCAL_MACHINE: RAYPATH = ..C:\Radiance\lib
- ✓ HKEY_LOCAL_MACHINE: BINPATH = C:\Radiance\bin
- ✓ HKEY_LOCAL_MACHINE: DRADPATH = C:\Program Files\Desktop

Your Radiance installation looks fine.

is wizard to turn on

Skip Wizard Always skip this wizard. **<< Back** **Next >>** **Cancel**

8

When you first run RADIANCE you will be prompted with this wizard.

In all windows you should always pick the 'Default Settings', if in the last window (called 'STEP 8 of 9') ECOTECT cannot find the RADIANCE binaries, select 'Fix' and select any RADIANCE binary under C:\Radiance\bin\

Select 'Always skip this wizard' to turn off the wizard in the future.

30.a

31.

Choose 'Run in RadianceCP' to start your RADIANCE simulation.

Select where you would like your project to be saved***.


32.

The rest of this menu allows you to modify the parameters of your simulation.

The higher you set your parameters (i.e. the number of indirect reflections) the longer your calculations will take.

33.

Select 'Check for Material rad files'.

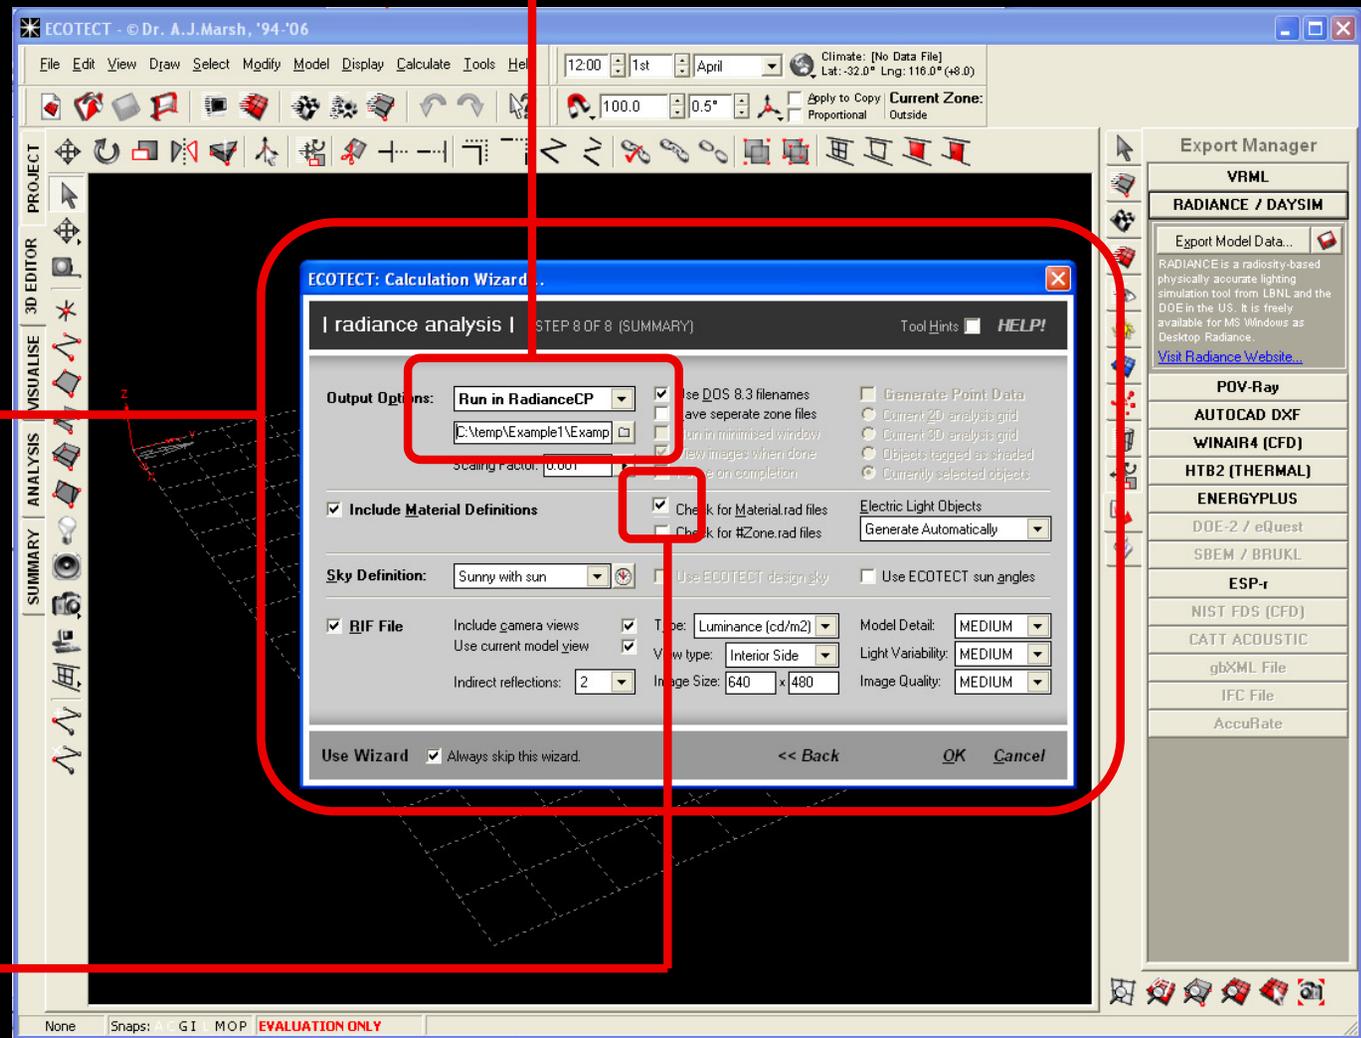**INFO**


***When saving files don't forget that no 'blanks' may be present in the file name (ex. version_1 and NOT version 1). For this example choose 'Sunny with sun', '2' indirect reflections and set Model Detail, Light Variability, and Image Quality to 'medium'. Save your project as C:\temp\Example1\Example1.rad.

34.

This is the RADIANCE interface window.

Click on 'RENDER' to start.

Your rendering could take anywhere from a few minutes to hours, depending on your settings and computer. With indirect reflections set to 2 and all other parameters set to medium, your simulation should only take a couple of minutes.

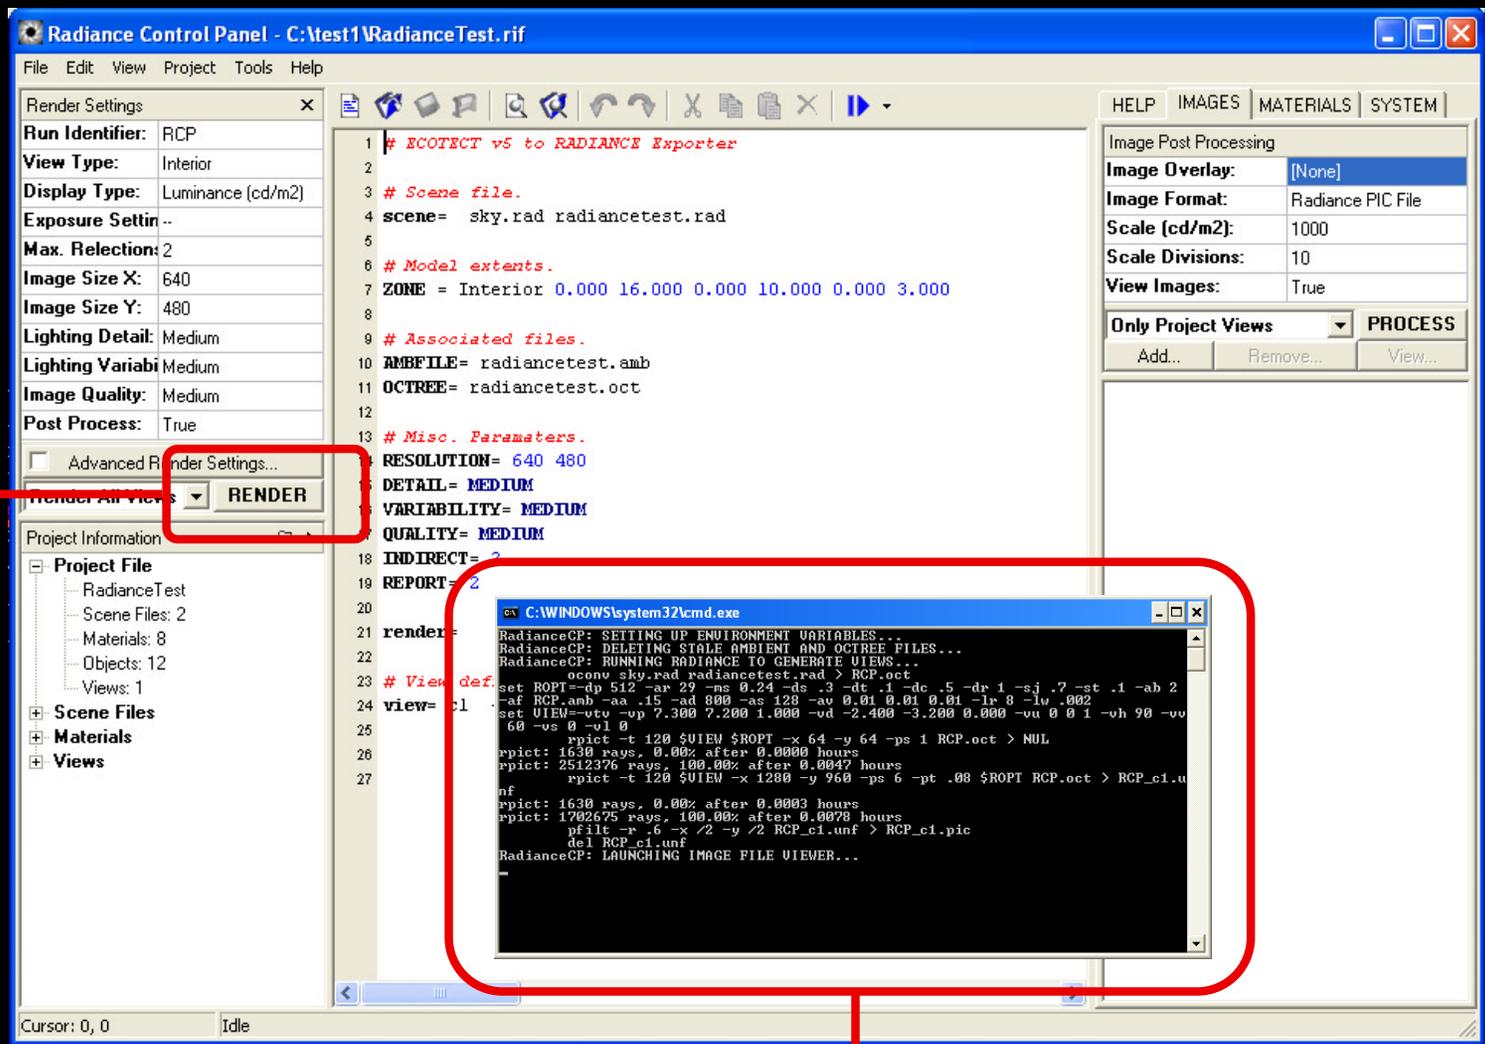

35.

A DOS window similar to this will appear.



Indirect reflection: 2
Model Detail: medium
Light Variability: medium
Image Quality: medium
Simulation time: several minutes



Indirect reflection: 4
Model Detail: high
Light Variability: high
Image Quality: high
Simulation time: 1.5 hours


INFO

If you maintained the default setting for this simulation, you should get a image similar to the one shown above to the left. Note that for this particular rendering the date and time in the ECOTECT main GUI was set to April 1st, 14:30. For a more accurate and realistic rendering you should increase the simulation parameters (see e.g. the image on the right). Increasing the simulation parameters also increases the simulation time. For more information of the RADIANCE simulation parameters, please refer to the references under <http://www.arch.mcgill.ca/prof/reinhart/software/Radiance.htm>.

36.


The RADIANCE 'image viewer' allows several ways to analyze a RADIANCE visualization. To obtain a 'False Colour' rendering just click on INFORMATION OVERLAY and select what you would like to see.

For this exercise select 'False Colour', Scale =3000 and click on the arrow to the right.

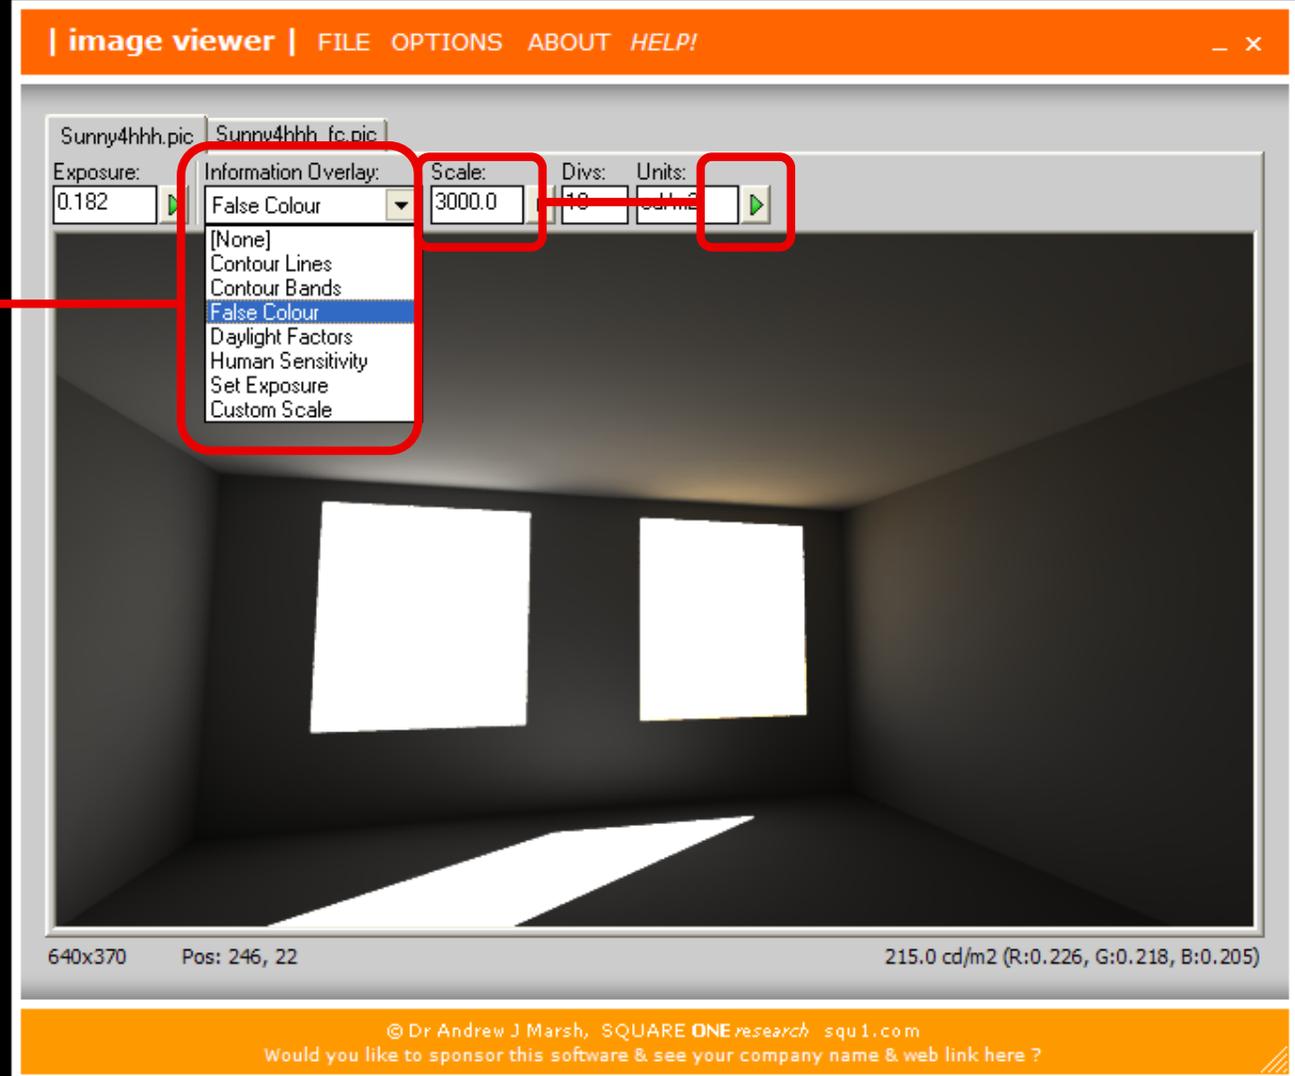

37.

As different images are generated, they are stored and can be accessed by clicking on these tabs.

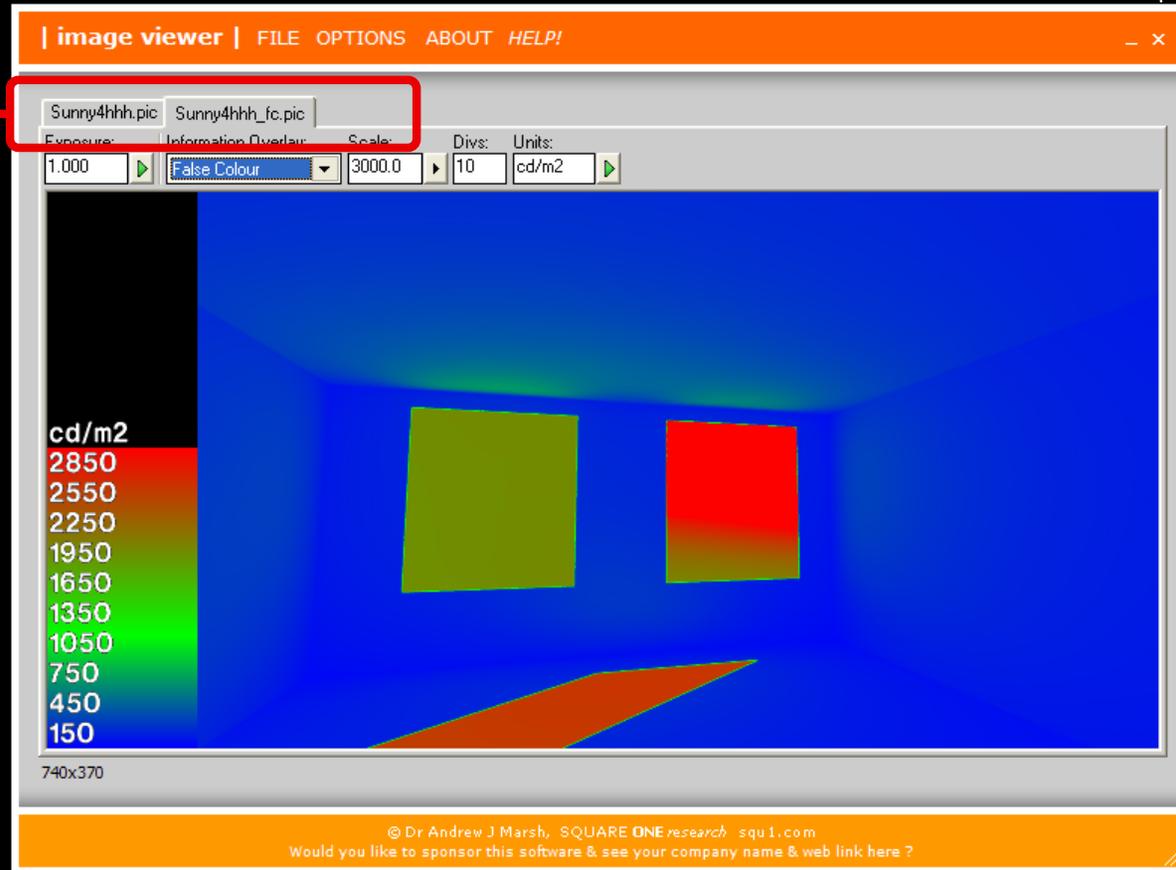

INFO

This is a 'Falsecolor' rendering of the model taken under a sunny sky on April 1st at 14:30. The image illustrates the luminances reaching the viewer from the different directions within the field of view. Human subject studies suggest that luminances above 2500 to 3000 candela/m² in the field of view of an office worker may start causing discomfort glare. Applying this criterion to this RADIANCE rendering suggests that the daylighting entering the space through the clear double glazing might cause glare whereas luminances coming from the translucent glazing are still within an acceptable range. Note that this analysis only applies to this particular sky condition and view point.

Please note: The first time you are trying to generate a falsecolor image you might get an error message stating "RGBE read error". If this is the case, you have to reset your Radiance directory within the 'image viewer' program above under OPTIONS >> SETTINGS (see also Step 30.a).

DAYSIM

So far, you have used ECOTECH to calculate the daylight factor distribution within your model (overcast sky) and RADIANCE to generate a physically accurate rendering of the model under a sunny sky. In this section you will use DAYSIM to calculate daylight levels under all possible sky conditions that may occur at your building site in a year. Based on this information DAYSIM derives several *dynamic, climate-based* daylighting metrics, e.g. daylight autonomy.


It is not necessary to launch DAYSIM. The program's interface is automatically launched when you export your ECOTECH model.

INFO

///DYNAMIC METRICS/// Daylight factor and illuminance distributions are *static* daylighting metrics, i.e. they are based on a single sky condition. *Dynamic* or climate-based metrics are based on all sky conditions that occur in a year at a given building site. For more information please refer to <http://irc.nrc-cnrc.gc.ca/pubs/fulltext/nrcc48669/nrcc48669.pdf>. An example rating system that already uses a dynamic metric is the classroom rating system by the California Collaborative for High Performance Schools (<http://www.chps.net/>).

38. Define a grid in ECOTECT.

For this exercise a grid was already defined. You may continue your simulation without making any changes.

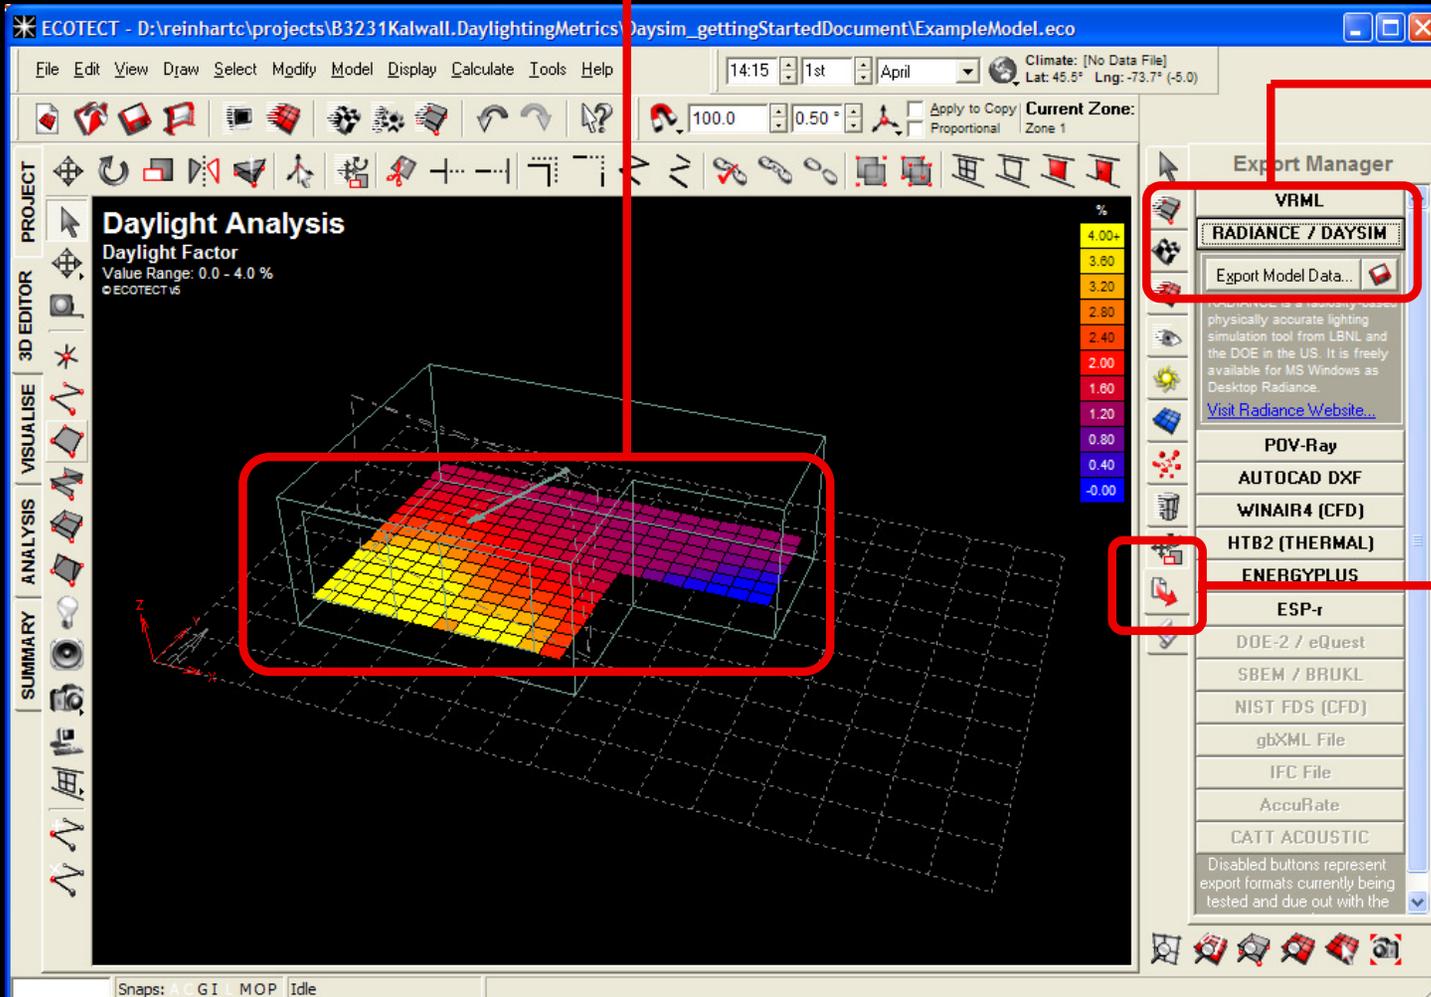

40.

Click on the 'RADIANCE/DAYSIM' button and export your model data.

39.

Select the 'Export Manager' menu.

41.


Select the options shown here.

42.

Choose 'DAYSIM Header' in order to start your DAYSIM simulation. Again, select where you would like your project to be saved***.

43.

Make sure to select 'Check for Material.rad files'. Click the 'OK' button.

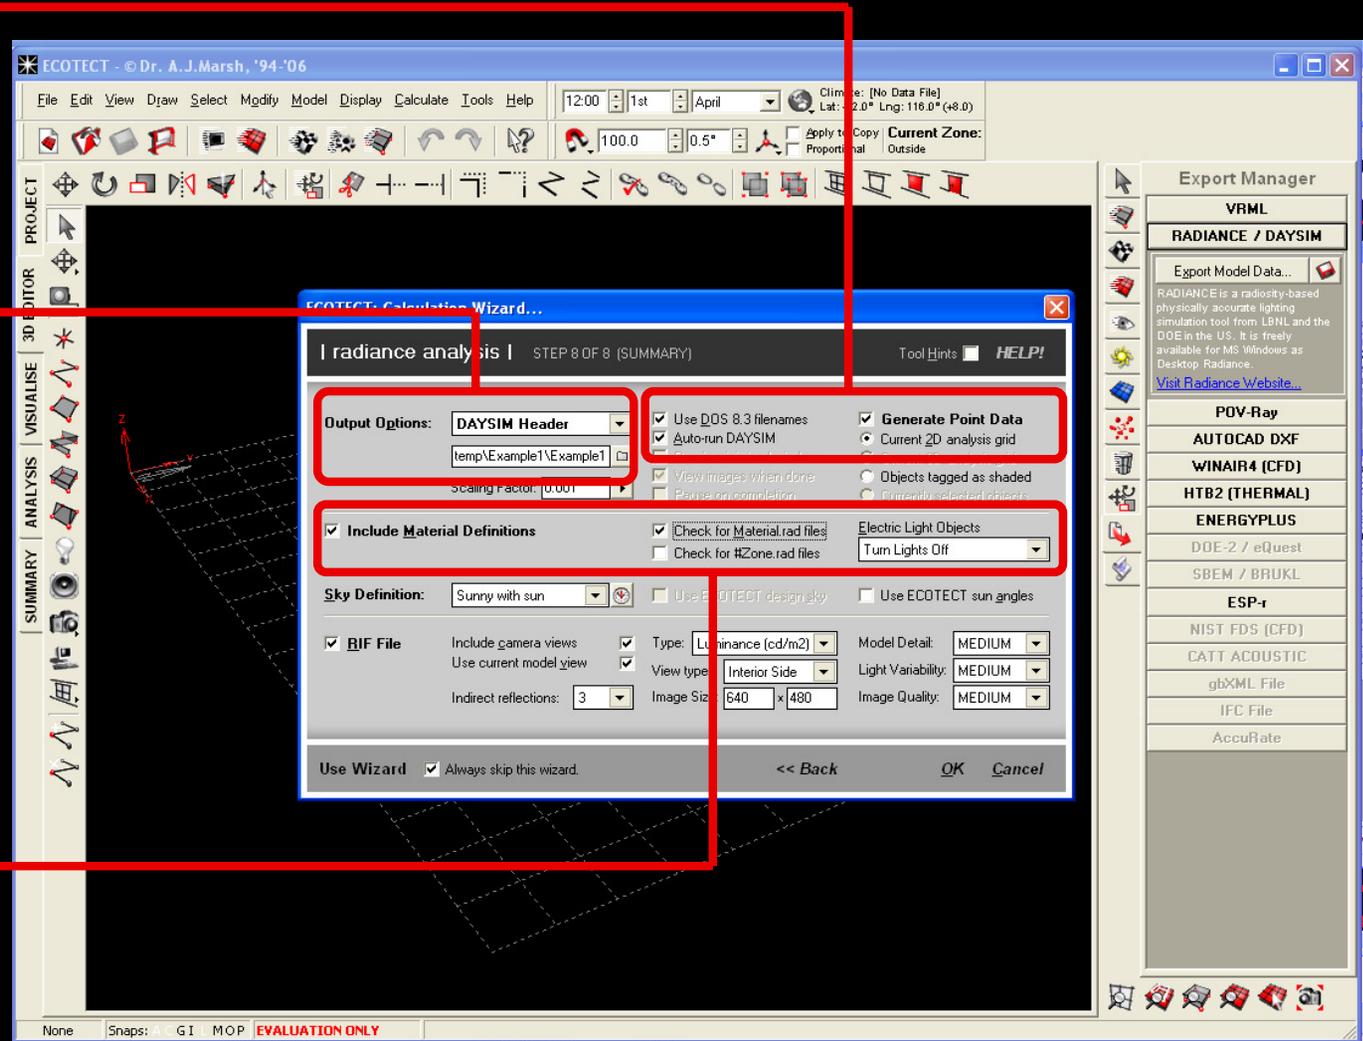

INFO

***When saving files don't forget that no 'blanks' may be present in the file name (ex. version_1 and NOT version 1). For the purposes of this example you can save your project under C:\temp\Example1\Example1.hea.


44.

Leave the 'Shading Device' setting to 'Static – Included in Building Geometry'.

45.

Using the 'Edit Material File' button you can modify the material descriptions in DAYSIM.


For this exercise this step is not necessary since you already included the 'Material Definitions' from ECOTECT (step 43).

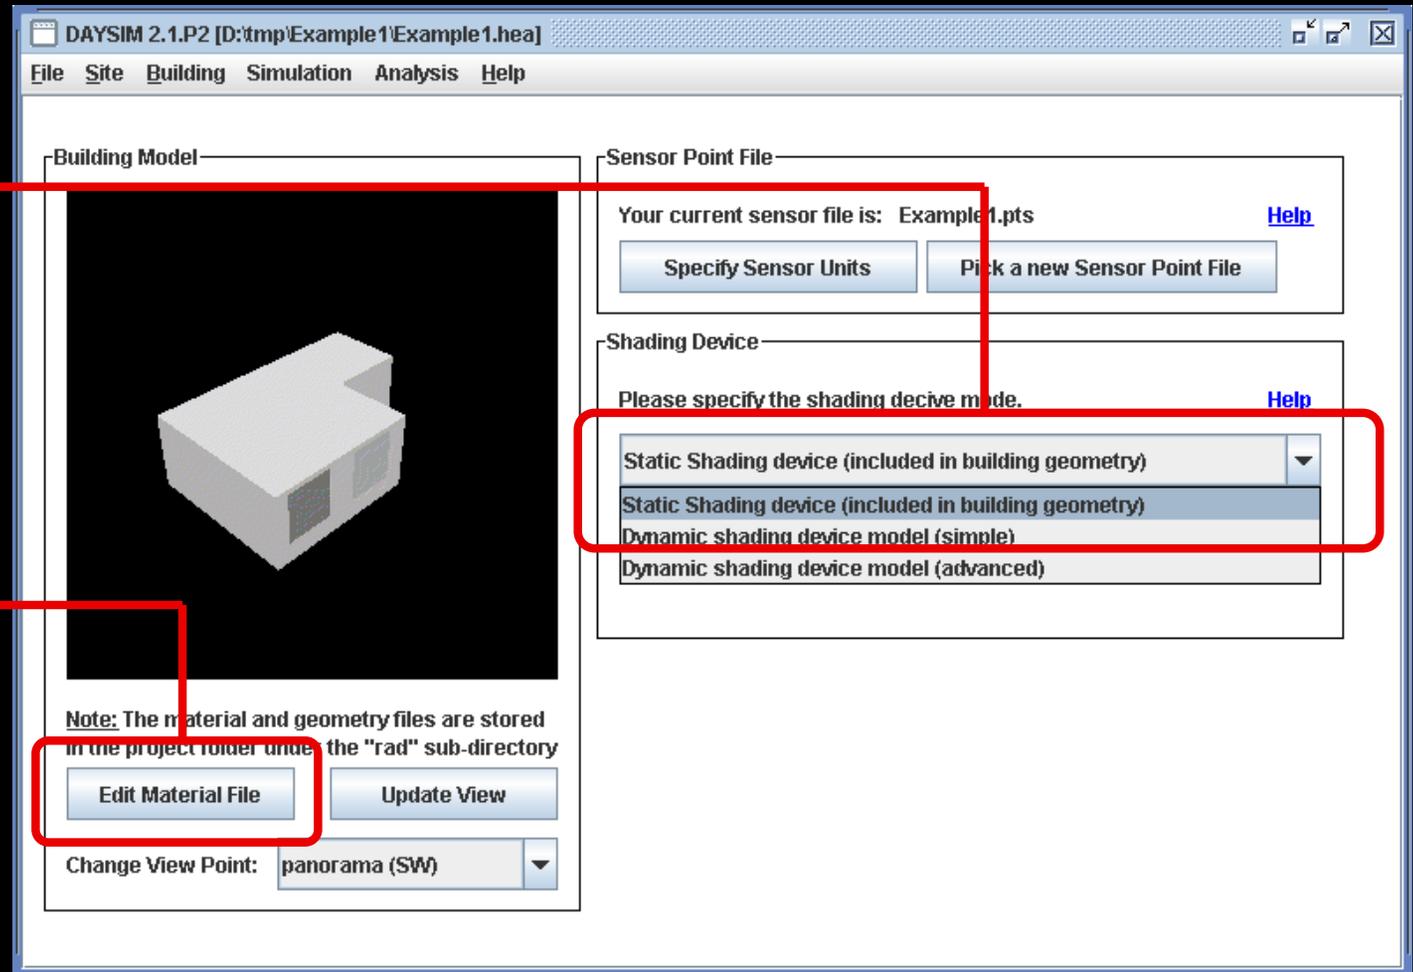**INFO**

When ECOTECT is prompted to "check for material.rad files" during the model output (step 43) it checks whether for any of the material layers a file called '*layer name.rad*' is located in the Global Material Directory that you specified in step 5.

46.


Under SIMULATION, you can set the simulation parameters for the DAYSIM simulation. DAYSIM uses the same raytracer that was used to generate the RADIANCE rendering. For DAYSIM, the simulation parameters only need to be slightly modified since you are now calculating illuminances at discrete sensors. Higher parameter settings result in longer processing time. Therefore, the art is to use parameters that are 'sufficiently high but not too high'.

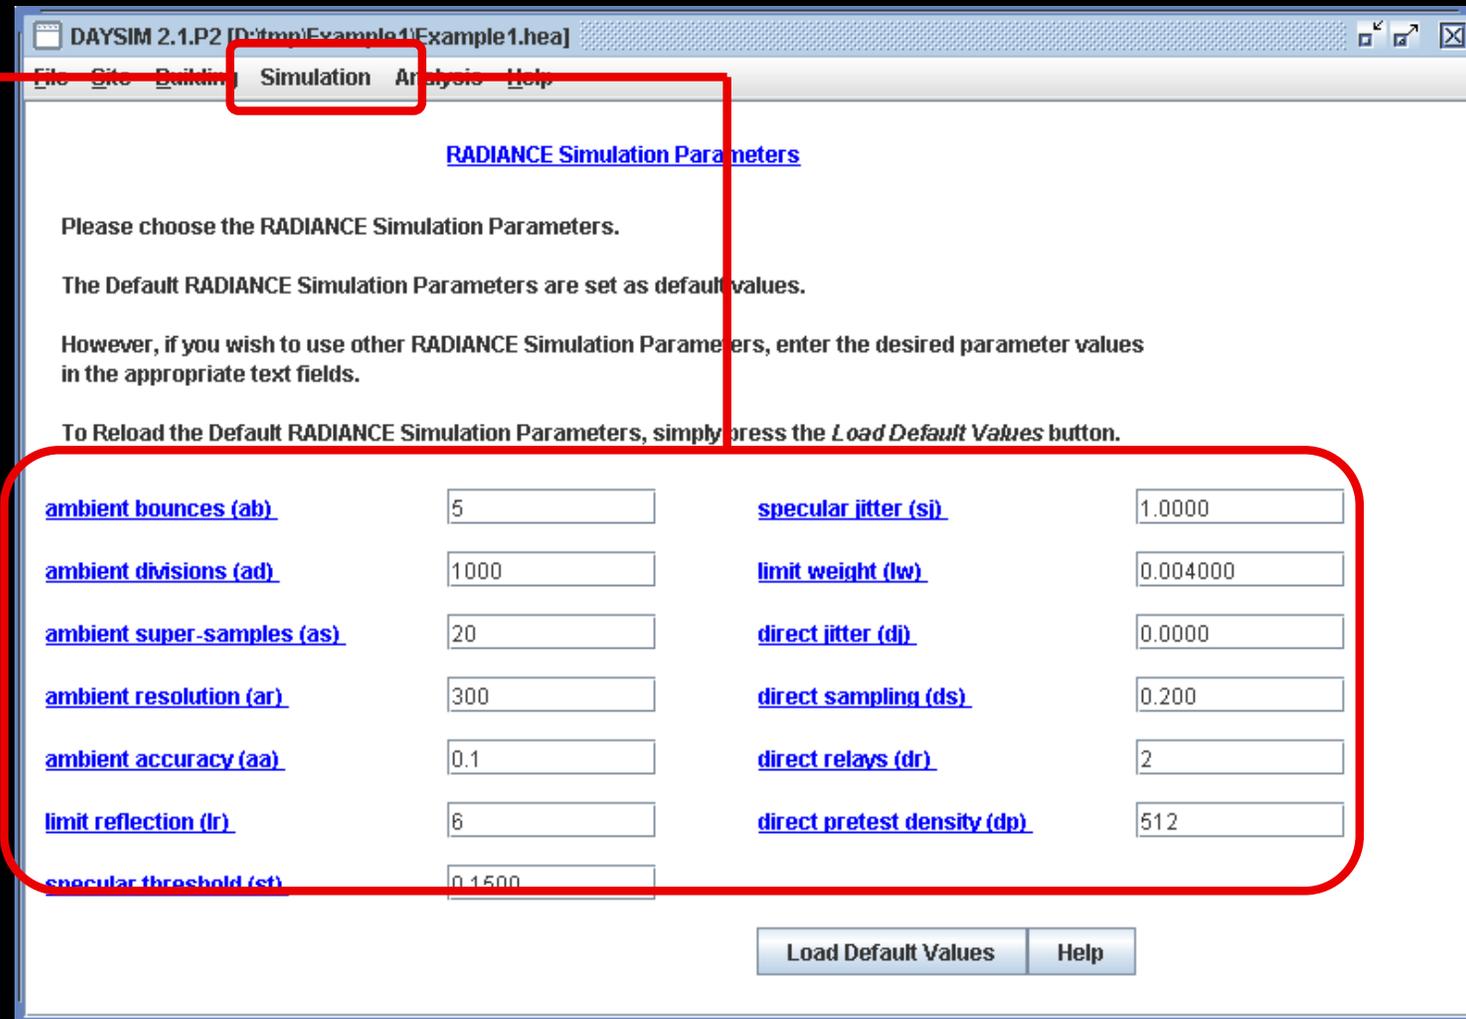

For this exercise, use the parameters to the right.

INFO

Several simulation parameter sets and an explanation on when to use them are given in the DAYSIM Tutorial (<http://irc.nrc-cnrc.gc.ca/ie/lighting/daylight/daysim/docs/DaysimTutorial.pdf>) section 2.1.4.

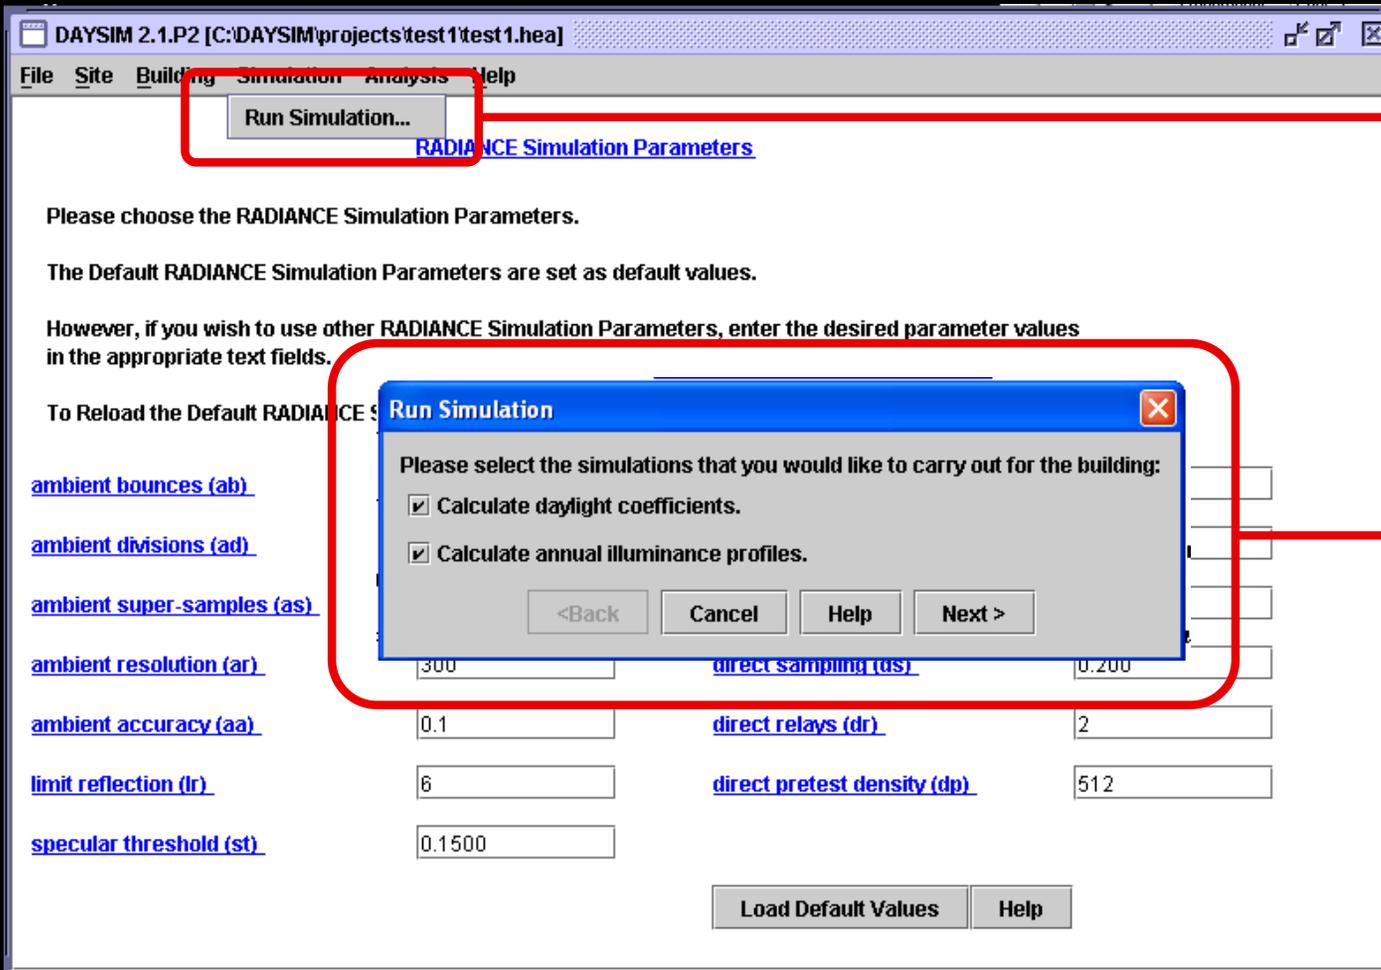

47.


Click on 'Run Simulation'.

48.

The following window will appear. Make sure to check off both options, as shown here.

INFO

DAYSIM requires two steps to calculate the annual amount of daylight in a building. During the first step daylight coefficients are calculated to describe the interaction of the surrounding light with the building. During the second step the daylight coefficients are combined with the building site's climate data that you specified in step 27.

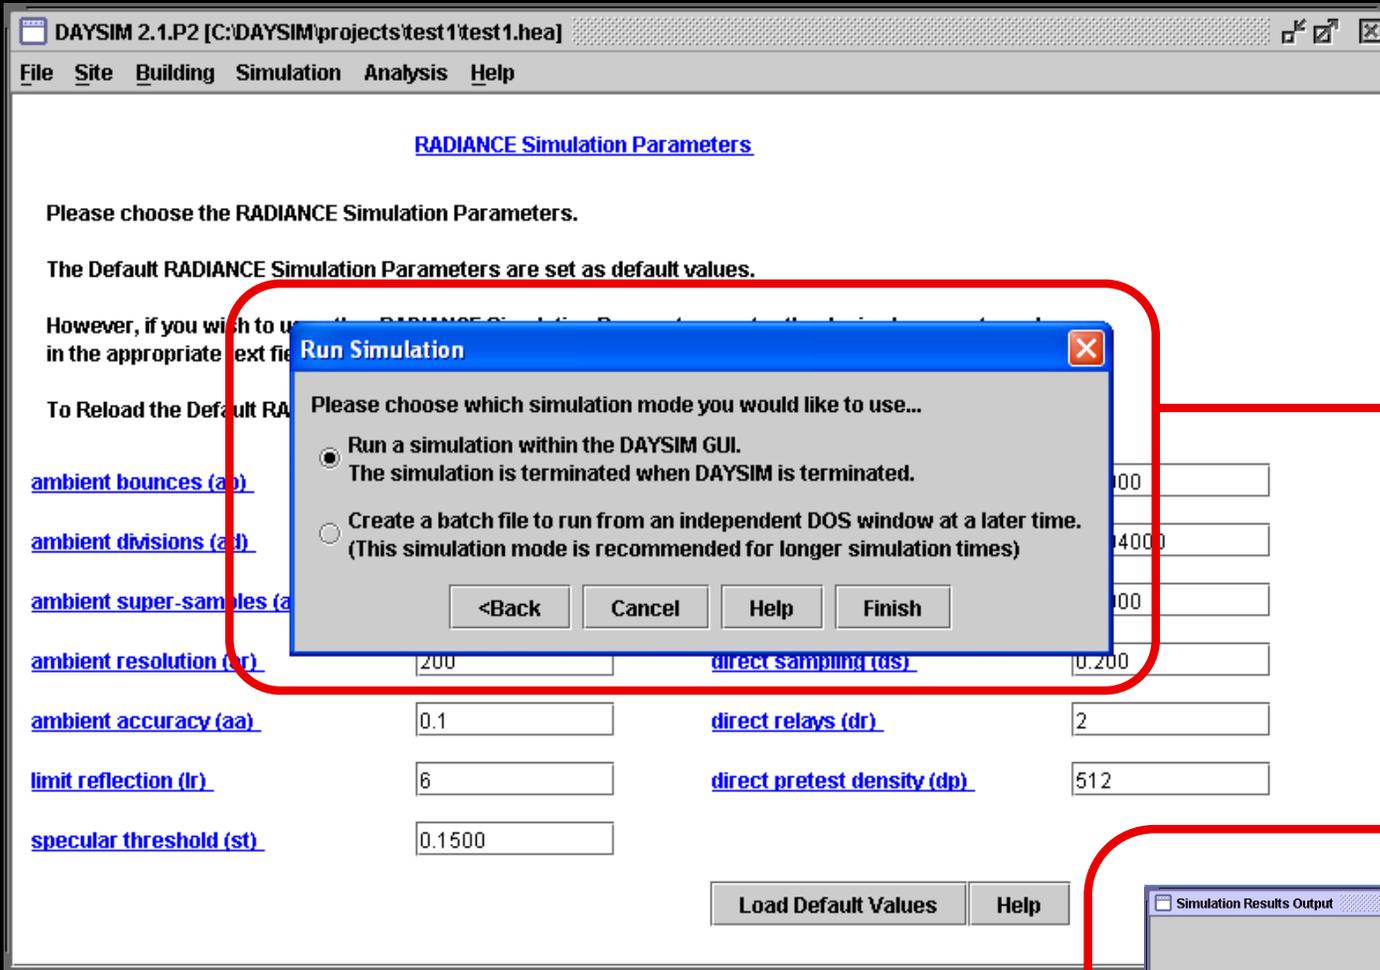


49.

Check off 'Run a simulation within the DAYSIM GUI' and press Finish.

50.

The following window will appear once DAYSIM has completed the simulation. Switch to the ANALYSIS menu.

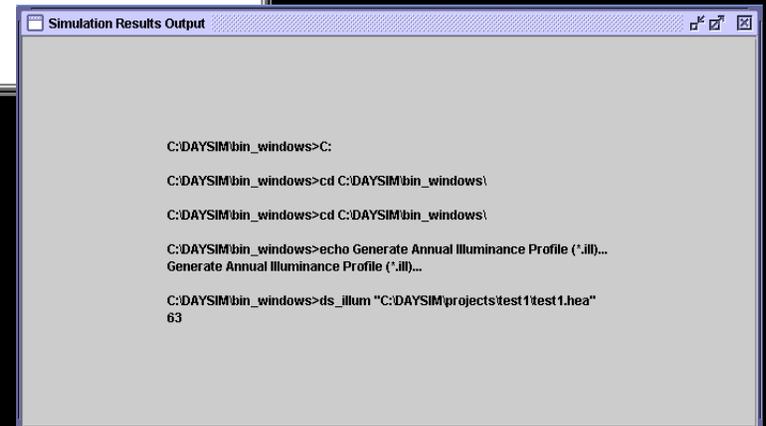

51.

This menu allows you to set building occupancy and lighting requirements for your model. For this example leave the default 8AM to 5PM occupancy schedule and use a 'Minimum Illuminance Level' of 300 lux.

The screenshot shows the DAYSIM 2.1.P2 software interface. The 'Analysis' menu is active, and the 'User Requirements and Behavior' section is highlighted with a red box. This section includes the 'Minimum Illuminance Level' set to 300, and 'Lighting Use' and 'Blind Use' both set to 'Mix of Both'. The 'Lighting and Shading Control System' section is also highlighted with a red box, showing 'Installed Lighting Power Density' set to 1.5, 'Zone Size' set to 0.0, 'Blind Control' set to 'Manual', and 'Lighting Control' set to 'Manual on/off switch near the door'. A 'Start Daylighting Analysis' button is highlighted with a red box at the bottom.

52.

Start your 'Daylighting Analysis'.


INFO

Recommended minimum illuminance levels for different space types can be accessed by clicking on the 'Minimum Illuminance Level' label (underscored in blue). For more information on the different DAYSIM analysis input options, please refer to the help files and tutorial.

53.

Your DAYSIM results will be displayed as a webpage.

This summary provides you with key daylight performance indicators for your space.

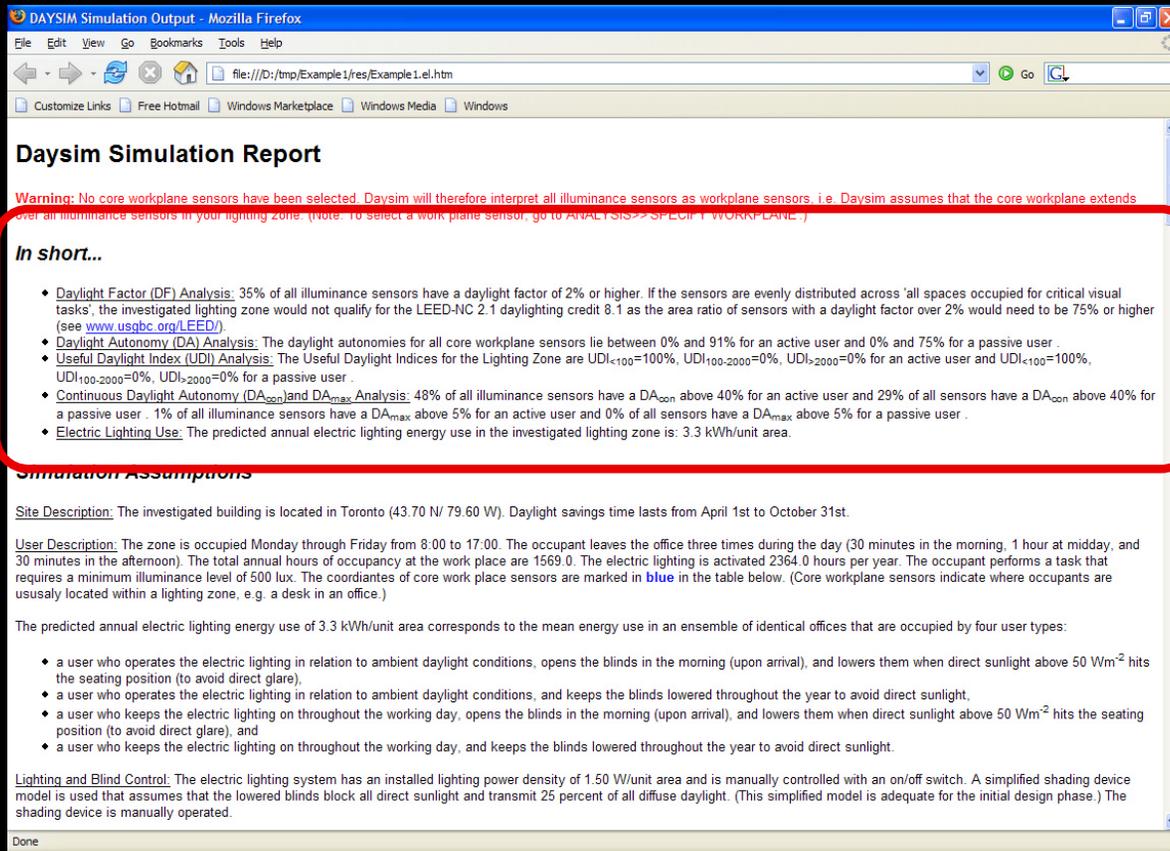

INFO

Since DAYSIM is based on the validated RADIANCE raytracer, Daylight Factor predictions using DAYSIM are more reliable than those obtained with ECOTECH.

54.

The second part of the results file is a table displaying the values obtained for all the sensors on the grid you defined in ECOTECT.

Detailed Simulation Results


The table below shows the daylight factor and various dynamic daylight performance metrics for all sensor points individually. Definitions of these quantities are provided in chapter one of the Daysim Tutorial. To guide the reader's eye, the following color code is used:

- Coordinates of core workplane sensors are shown in **blue**.
- Daylight factor levels over 2% are shown in **green**.
- Annual light exposure levels of medium and high sensitivity (CIE Categories III and IV) are shown in **dark green and light green**.

x	y	z	DF [%]	DA [%] (active)	DA [%] (passive)	DAcon [%] (active)	DAcon [%] (passive)	DAmaz [%] (active)	DAmaz [%] (passive)	UDI<100 [%] (active)	UDI<100 [%] (passive)	UDI100-2000 [%] (active)	UDI100-2000 [%] (passive)	UDI>2000 [%] (active)	UDI>2000 [%] (passive)	annual light exposure [luxh]
2.225	2.188	0.600	3.5	32	14	64	47	0	0	10	25	85	75	6	0	1617730
2.675	2.188	0.600	12.9	81	82	92	81	3	0	3	8	74	86	24	6	4887981
3.125	2.188	0.600	16.4	87	89	94	84	3	0	2	7	67	82	31	11	5588481
3.575	2.188	0.600	15.5	87	89	94	84	2	0	2	6	66	81	32	13	5538241
4.025	2.188	0.600	13.8	84	84	93	81	1	0	2	7	73	85	25	7	4836899
4.475	2.188	0.600	4.8	40	17	72	51	0	0	7	21	93	79	0	0	1684054
4.925	2.188	0.600	1.8	9	0	43	28	0	0	17	38	83	82	0	0	772828
5.375	2.188	0.600	2.2	15	0	53	33	0	0	13	31	87	89	0	0	988238
5.825	2.188	0.600	2.9	20	0	65	45	0	0	9	25	91	75	0	0	1348005
6.275	2.188	0.600	3.0	21	0	66	48	0	0	9	25	91	75	0	0	1389171
6.725	2.188	0.600	2.8	20	0	63	44	0	0	9	26	91	74	0	0	1308018
7.175	2.188	0.600	2.0	13	0	49	31	0	0	15	33	85	87	0	0	915765
7.625	2.188	0.600	1.0	2	0	28	16	0	0	37	62	63	38	0	0	473406
2.225	2.563	0.600	7.8	68	48	86	73	1	0	4	13	84	87	13	0	3568806
2.675	2.563	0.600	13.8	86	69	94	84	4	0	2	6	67	82	32	11	6920294
3.125	2.563	0.600	17.5	90	75	96	87	5	0	1	5	54	73	45	22	7195385
3.575	2.563	0.600	17.8	91	75	96	87	5	0	1	5	51	71	48	25	7228195
4.025	2.563	0.600	14.8	88	70	95	84	3	0	1	6	64	79	35	15	6887128
4.475	2.563	0.600	8.3	71	43	88	72	0	0	2	12	92	88	5	0	3258609
4.925	2.563	0.600	4.3	42	18	75	55	0	0	7	20	93	80	0	0	1770419
5.375	2.563	0.600	3.3	22	1	68	48	0	0	9	24	91	76	0	0	1440930
5.825	2.563	0.600	3.3	22	0	70	50	0	0	8	23	92	77	0	0	1510897
6.275	2.563	0.600	3.2	21	0	69	49	0	0	9	23	91	77	0	0	1466457
6.725	2.563	0.600	2.9	20	0	64	45	0	0	9	25	91	75	0	0	1339719
7.175	2.563	0.600	2.2	15	0	53	34	0	0	13	31	87	69	0	0	1008757
7.625	2.563	0.600	1.5	5	0	39	23	0	0	20	42	80	58	0	0	682201
2.225	2.938	0.600	7.5	70	50	87	73	1	0	4	12	84	88	13	0	3581244
2.675	2.938	0.600	11.0	81	63	92	81	3	0	2	8	74	86	24	5	4917462
3.125	2.938	0.600	12.9	87	70	94	83	3	0	2	6	68	83	30	10	5630517
3.575	2.938	0.600	13.2	87	69	94	84	3	0	1	6	69	83	30	11	5576517
4.025	2.938	0.600	11.5	84	64	93	81	2	0	2	7	77	88	21	5	4802683
4.475	2.938	0.600	8.0	72	45	89	73	0	0	3	12	92	88	6	0	3276649
4.925	2.938	0.600	5.2	55	29	82	63	0	0	5	16	94	84	1	0	2202955
5.375	2.938	0.600	3.8	37	14	74	54	0	0	7	21	93	79	0	0	1662758
5.825	2.938	0.600	3.2	31	0	68	48	0	0	8	24	91	76	0	0	1456504

INFO

The results shown above can be imported back into ECOTECT and displayed graphically. Follow the steps on the following slides.

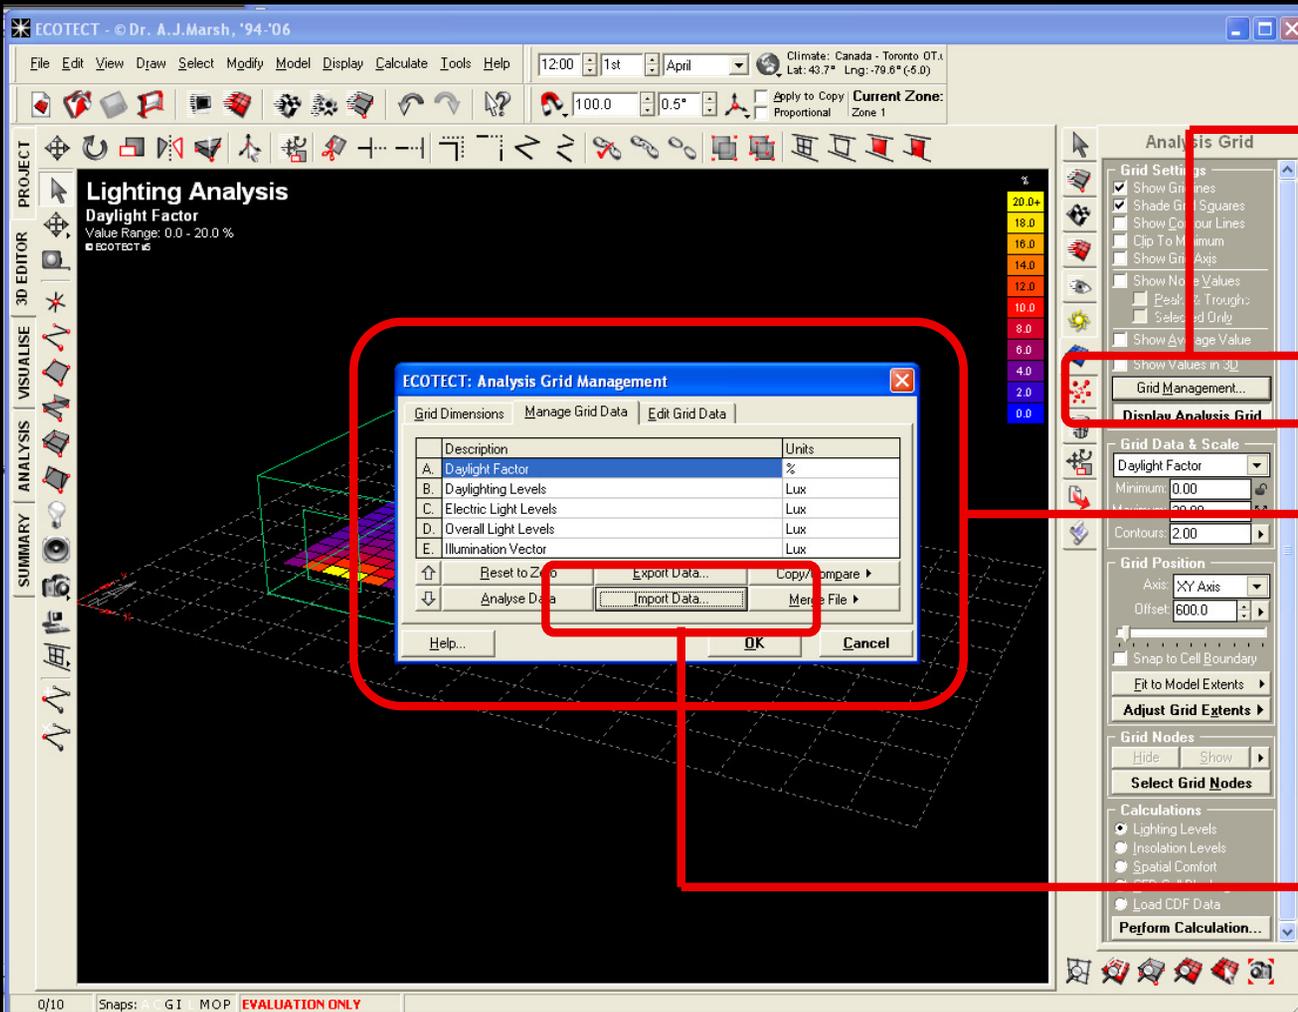

55.

Under 'Analysis Grid', select 'Grid Management'.

56.


In the "Analysis Grid Management" select the 'Manage Grid Data' tab.

57.

Select 'Import Data'.

58.

The following window will appear. The DAYSIM result files (*.DA) are located in a new subdirectory called 'res' that DAYSIM created in the main Radiance/Daysim output directory which was specified in Step 42. For this exercise, this would be C:\temp\Example1\res. Find the file called *filename.daylight_autonomy.active.DA* and open it to visualize your results.

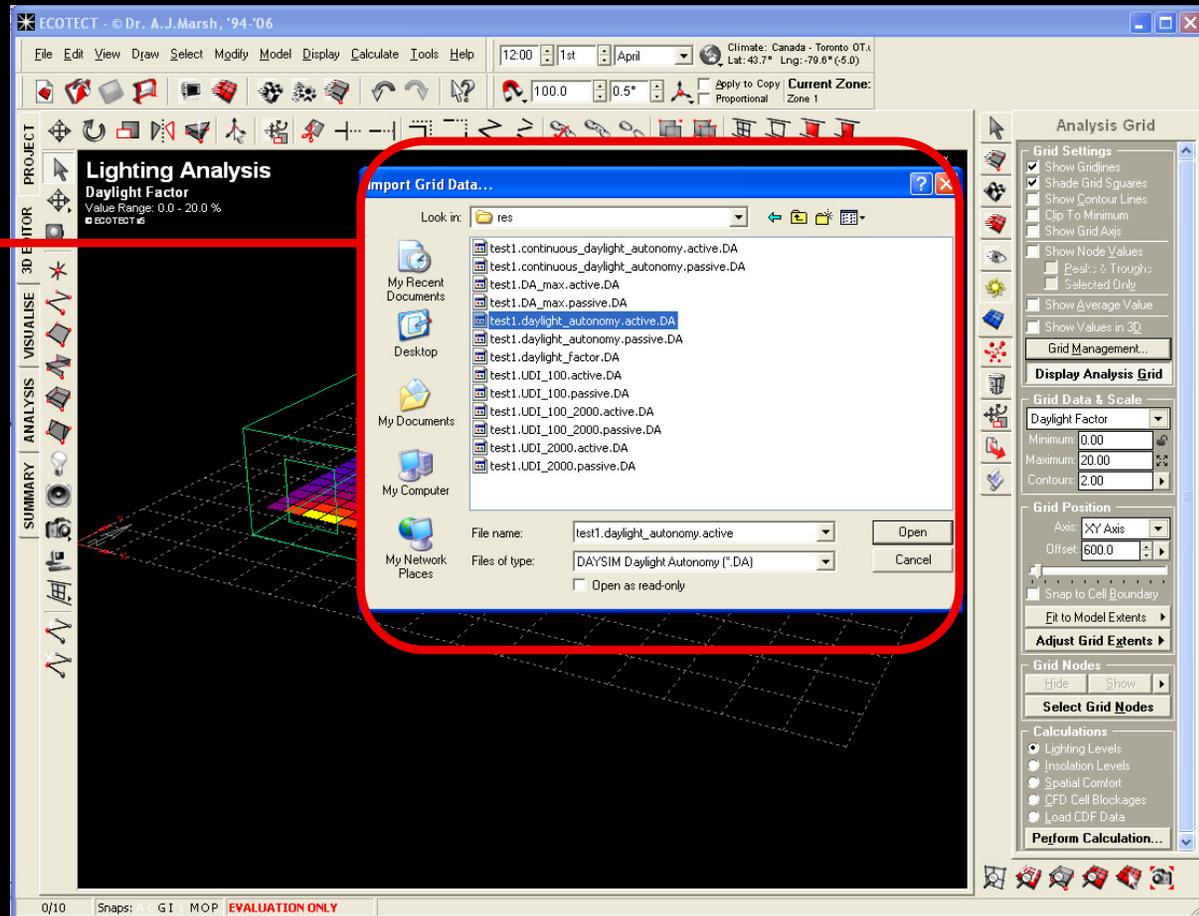


INFO

DAYSIM automatically generates a number of 'DA' files: The file with the extension *.daylight_factor.DA corresponds to daylight factor calculations based on RADIANCE. The two files *.daylight_autonomy.active.DA and *.daylight_autonomy.passive.DA contain daylight autonomy results for an 'active' and 'passive' user. For a static shading device (lightshelf or overhangs as opposed to movable venetian blinds) the daylight autonomy results are the same for 'active' and 'passive' as the occupant cannot influence the daylight available in the space. For more information please refer to the DAYSIM Tutorial Section 2.2 .

Daylight Analysis


Daylight Autonomy [300lux]
Value Range: 0 - 100 %
© ecotect

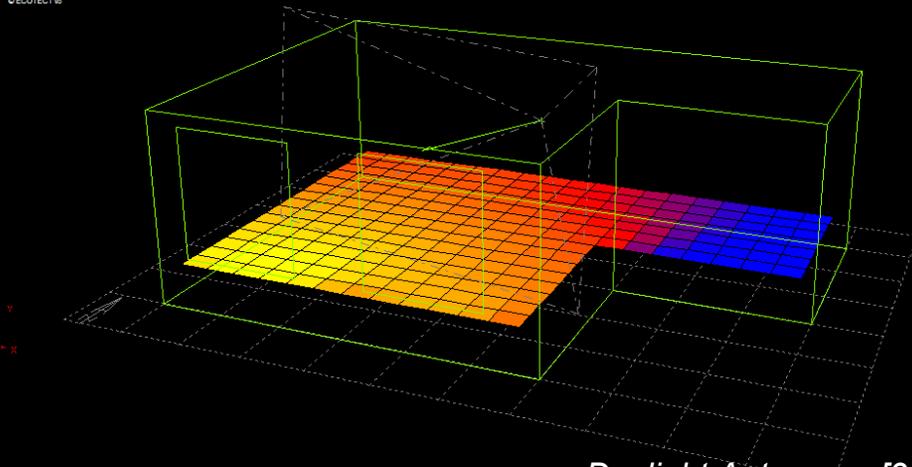

Daylight Autonomy [300lux]

Daylight Analysis

Useful Daylight Index [100-2000lux]
Value Range: 0 - 100 %
© ecotect

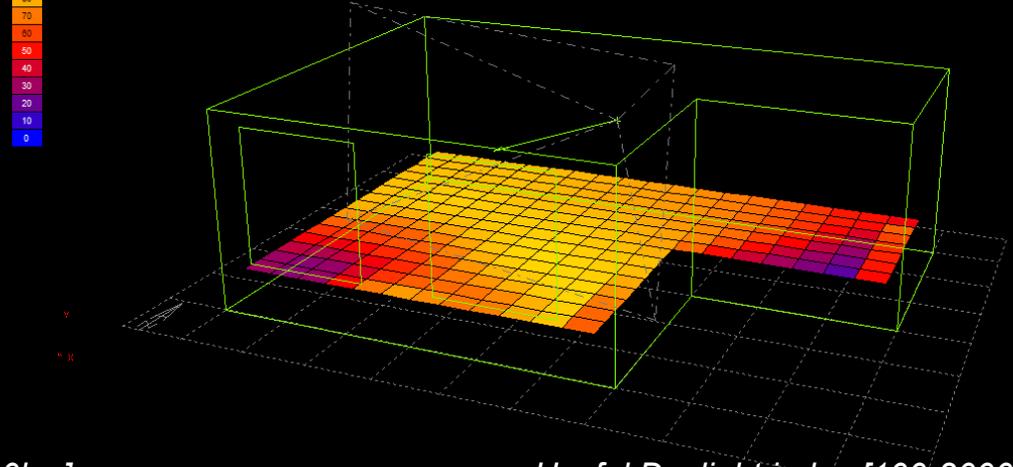

Useful Daylight index [100-2000lux]

59.

Above you see how your Daylight Autonomy and Useful Daylight Index [100-2000lux] should look like in ECOTECT.

INFO

The Daylight Autonomy describes the percentage of the occupied time of the year when the illuminance at a sensor point is above the required minimum level (300 lux in this case). The Useful Daylight Index [100-2000 lux] is the percentage of the occupied time of the year when the illuminance at a sensor lies between 100 and 2000 lux (<http://irc.nrc-cnrc.gc.ca/pubs/fulltext/nrcc48669/nrcc48669.pdf>). Both metrics indicate that the areas adjacent to the clear and translucent glazings are well daylight throughout the year. The UDI falls to about 30% right near the clear glazing revealing an 'oversupply' of daylight and potential for glare near this window. This result suggests that venetian blinds and/or a lightshelf are required for the clear glazing to control the daylight near this window. DAYSIM can be used to further quantify by how much such measures would change the annual amount of daylight in the space (see DAYSIM Tutorial section 5.3).

CONCLUSION

This document provided a quick, non-exhaustive overview of the daylight simulation capabilities offered by ECOTECH, RADIANCE and DAYSIM. Should you decide to use these tools in the future consult the REFERENCE section for further reading. Remember:

- It is your responsibility to learn the assumptions and limitations of the programs you are using.
- Simulations take time. Before starting a simulation you should have a clear vision of how the results can help you resolve a specific design concern that you cannot answer otherwise.

REFERENCES

- **ECOTECH:** Consult the ECOTECH Teaching Packages (ECOTECH >> Help >> Teaching Packages) to get further information on the program's underlying calculation methods and how to explore the impact of key design aspects (e.g. window size) on daylighting.
- **RADIANCE:** Developing a basic understanding of the RADIANCE simulation parameters and material models is the key to reliable simulations. A list of online resources for RADIANCE is available under <http://www.arch.mcgill.ca/prof/reinhart/software/Radiance.htm>. Join the RADIANCE discussion forum under www.radiance-online.org.
- **DAYSIM:** Consult the DAYSIM Tutorial (DAYSIM >> Help >> Daysim Tutorial) for detailed information on the program's underlying assumptions and some example applications. Join the DAYSIM discussion forum under <http://groups.google.com/group/daysim>.

ACKNOWLEDGEMENT

The development of this document has been supported by the following organizations.

Kalwall Corporation: Kalwall has been manufacturing insulated, translucent, structural daylight sandwich panel systems for over 50 years and holds the original patents of these systems. Kalwall products have been installed in a variety of architectural applications ranging from window systems to complete structures (www.kalwall.com).

National Research Council Canada, Institute for Research in Construction: The institute is the Government of Canada's principal research organization related to the design, construction, and operation of buildings (<http://irc.nrc-cnrc.gc.ca>).

The following individuals generously provided feedback to earlier versions of this document: Magali Bodart, Anca Galasiu, Amy Glead, Conor Sampson and Valerio LoVerso.