

Lecture Notes on Fluid Dynamics

(1.63J/2.21J)

by Chiang C. Mei, MIT

1.2 Kinematics of Fluid Motion -the Eulerian picture

Consider two neighboring stations (not two fluid particles) \vec{x} and \vec{x}' at the same instant t , where $\delta\vec{x} = \vec{x}' - \vec{x}$ is small. The fluid velocity at the two stations are related by

$$\vec{q}(\vec{x}', t) = \vec{q}(\vec{x}, t) + (\vec{x}' - \vec{x}) \cdot \nabla \vec{q}(\vec{x}, t) + O(\vec{x}' - \vec{x})^2 \quad (1.2.1)$$

Hence

$$\delta\vec{q}(\vec{x}, t) = \vec{q}(\vec{x}', t) - \vec{q}(\vec{x}, t) = \delta\vec{x} \cdot \nabla \vec{q}(\vec{x}, t) + O(\delta\vec{x})^2 \quad (1.2.2)$$

Let us introduce the index notation:

$$q_1 = u, \quad q_2 = v, \quad q_3 = w; \quad x_1 = x, \quad x_2 = y, \quad x_3 = z \quad (1.2.3)$$

and Einstein's convention: Repeated indices are summed over the range from 1 to 3, and the summation symbol is omitted but implied. For example,

$$\sum_{i=1}^3 q_i q_i = q_i q_i = q_1^2 + q_2^2 + q_3^2 = \vec{q} \cdot \vec{q}$$

Thus we may write (1.2.2) as

$$\delta q_i = \delta x_j \frac{\partial q_i}{\partial x_j}, \quad i = 1, 2, 3. \quad (1.2.4)$$

Now

$$\frac{\partial q_i}{\partial x_j} = \frac{1}{2} \left(\frac{\partial q_i}{\partial x_j} + \frac{\partial q_j}{\partial x_i} \right) + \frac{1}{2} \left(\frac{\partial q_i}{\partial x_j} - \frac{\partial q_j}{\partial x_i} \right) \quad (1.2.5)$$

Define the rate-of-strain tensor by

$$e_{ij} = \frac{1}{2} \left(\frac{\partial q_i}{\partial x_j} + \frac{\partial q_j}{\partial x_i} \right) \quad (1.2.6)$$

and the vorticity tensor by

$$\Omega_{ij} = \frac{1}{2} \left(\frac{\partial q_i}{\partial x_j} - \frac{\partial q_j}{\partial x_i} \right) \quad (1.2.7)$$

Note that

$$e_{ij} = e_{ji}, \quad \Omega_{ij} = -\Omega_{ji} \quad (1.2.8)$$

and (1.2.4) becomes

$$\delta q_i = \delta x_j e_{ij} + \delta x_j \Omega_{ij} \quad (1.2.9)$$

Let us examine the physics of these terms.

1.2.1 Rate-of-strain tensor

In matrix form, the rate-of-strain tensor is :

$$\begin{aligned}
\{e_{ij}\} &= \begin{pmatrix} e_{11} & e_{12} & e_{13} \\ e_{21} & e_{22} & e_{23} \\ e_{31} & e_{32} & e_{33} \end{pmatrix} \\
&= \begin{pmatrix} \frac{\partial q_1}{\partial x_1} & \frac{1}{2} \left(\frac{\partial q_1}{\partial x_2} + \frac{\partial q_2}{\partial x_1} \right) & \frac{1}{2} \left(\frac{\partial q_1}{\partial x_3} + \frac{\partial q_3}{\partial x_1} \right) \\ \frac{1}{2} \left(\frac{\partial q_2}{\partial x_1} + \frac{\partial q_1}{\partial x_2} \right) & \frac{\partial q_2}{\partial x_2} & \frac{1}{2} \left(\frac{\partial q_2}{\partial x_3} + \frac{\partial q_3}{\partial x_2} \right) \\ \frac{1}{2} \left(\frac{\partial q_3}{\partial x_1} + \frac{\partial q_1}{\partial x_3} \right) & \frac{1}{2} \left(\frac{\partial q_3}{\partial x_2} + \frac{\partial q_2}{\partial x_3} \right) & \frac{\partial q_3}{\partial x_3} \end{pmatrix} \quad (1.2.10) \\
&= \begin{pmatrix} \frac{\partial u}{\partial x} & \frac{1}{2} \left(\frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} \right) & \frac{1}{2} \left(\frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right) \\ \frac{1}{2} \left(\frac{\partial v}{\partial x} + \frac{\partial u}{\partial y} \right) & \frac{\partial v}{\partial y} & \frac{1}{2} \left(\frac{\partial v}{\partial z} + \frac{\partial w}{\partial y} \right) \\ \frac{1}{2} \left(\frac{\partial w}{\partial x} + \frac{\partial u}{\partial z} \right) & \frac{1}{2} \left(\frac{\partial w}{\partial y} + \frac{\partial v}{\partial z} \right) & \frac{\partial w}{\partial z} \end{pmatrix}
\end{aligned}$$

First, the diagonal terms. It is easy to see that $e_{11} = \partial u / \partial x$ is the rate of stretching per unit length in the direction of x , $e_{22} = \partial v / \partial y$ is the rate of stretching per unit length in the direction of y , and $e_{33} = \partial w / \partial z$ is the rate of stretching per unit length in the direction of z . They are the normal components of the rate of strain tensor.

Note that

$$e_{11} + e_{22} + e_{33} = e_{kk} = \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = \nabla \cdot \vec{q} \quad (1.2.11)$$

is the rate of volume dilatation due to fluid motion. For a proof, let us consider a cube with sides $(x, x + \Delta x)$, $(y, y + \Delta y)$ and $(z, z + \Delta z)$. After δt , the side along x will lengthen from Δx to $\Delta x + \Delta x \frac{\partial u}{\partial x} \delta t = \Delta x \left(1 + \frac{\partial u}{\partial x} \delta t \right)$. Similarly, the side along y will lengthen from Δy to $\Delta y \left(1 + \frac{\partial v}{\partial y} \delta t \right)$, and the side along z lengthens from Δz to $\Delta z \left(1 + \frac{\partial w}{\partial z} \delta t \right)$. Consequently the volume $V(t) = \Delta x \Delta y \Delta z$ will change to

$$\begin{aligned}
V(t + \delta t) &= \Delta x \left(1 + \frac{\partial u}{\partial x} \delta t \right) \Delta y \left(1 + \frac{\partial v}{\partial y} \delta t \right) \Delta z \left(1 + \frac{\partial w}{\partial z} \delta t \right) \\
&= V(t) \left[1 + \left(\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} \right) \delta t + O(\delta t)^2 \right]
\end{aligned}$$

Hence, the rate of volume dilatation is

$$\lim_{\delta t \rightarrow 0} \frac{1}{V} \frac{V(t + \delta t) - V(t)}{\delta t} = \frac{1}{V} \frac{dV}{dt} = \left(\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} \right) = \nabla \cdot \vec{q} \quad (1.2.12)$$

Next, the off-diagonal terms. Referring to Figure 1.2.1, consider a plane flow in which $\frac{\partial u}{\partial y}$ and $\frac{\partial v}{\partial x}$ do not vanish. In the time interval δt the side Δx rotates counterclockwise for an angle $\delta\theta_1 = \frac{\Delta v \delta t}{\Delta x} = \frac{\partial v}{\partial x} \delta t$. The side Δy rotates counterclockwise for an angle $\delta\theta_2 = -\frac{\Delta u \delta t}{\Delta y} = -\frac{\partial u}{\partial y} \delta t$. The total rate of angular deformation is

$$\frac{\delta\theta_1}{\delta t} - \frac{\delta\theta_2}{\delta t} = \frac{\partial v}{\partial x} + \frac{\partial u}{\partial y} \quad (1.2.13)$$

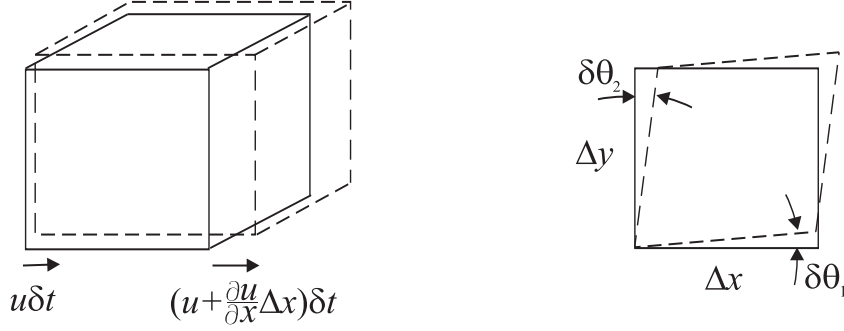


Figure 1.2.1: Rate of strain tensor components

Thus $e_{12} = e_{xy}$ is a rate of angular deformation, called the rate of shear strain. Other components e_{13} and e_{23} can be interpreted similarly.

1.2.2 Vorticity tensor

The matrix form of Ω_{ij} is

$$\begin{aligned}
 \{\Omega_{ij}\} &= \begin{pmatrix} \Omega_{11} & \Omega_{12} & \Omega_{13} \\ \Omega_{21} & \Omega_{22} & \Omega_{23} \\ \Omega_{31} & \Omega_{32} & \Omega_{33} \end{pmatrix} \\
 &= \begin{pmatrix} 0 & \frac{1}{2} \left(\frac{\partial q_1}{\partial x_2} - \frac{\partial q_2}{\partial x_1} \right) & \frac{1}{2} \left(\frac{\partial q_1}{\partial x_3} - \frac{\partial q_3}{\partial x_1} \right) \\ \frac{1}{2} \left(\frac{\partial q_2}{\partial x_1} - \frac{\partial q_1}{\partial x_2} \right) & 0 & \frac{1}{2} \left(\frac{\partial q_2}{\partial x_3} - \frac{\partial q_3}{\partial x_2} \right) \\ \frac{1}{2} \left(\frac{\partial q_3}{\partial x_1} - \frac{\partial q_1}{\partial x_3} \right) & \frac{1}{2} \left(\frac{\partial q_3}{\partial x_2} - \frac{\partial q_2}{\partial x_3} \right) & 0 \end{pmatrix} \quad (1.2.14) \\
 &= \begin{pmatrix} 0 & \frac{1}{2} \left(\frac{\partial u}{\partial y} - \frac{\partial v}{\partial x} \right) & \frac{1}{2} \left(\frac{\partial u}{\partial z} - \frac{\partial w}{\partial x} \right) \\ \frac{1}{2} \left(\frac{\partial v}{\partial x} - \frac{\partial u}{\partial y} \right) & 0 & \frac{1}{2} \left(\frac{\partial v}{\partial z} - \frac{\partial w}{\partial y} \right) \\ \frac{1}{2} \left(\frac{\partial w}{\partial x} - \frac{\partial u}{\partial z} \right) & \frac{1}{2} \left(\frac{\partial w}{\partial y} - \frac{\partial v}{\partial z} \right) & 0 \end{pmatrix}
 \end{aligned}$$

Because of the anti-symmetry, there are only three independent components, which can also be used to define the vorticity vector $\vec{\zeta}$:

$$\begin{aligned}
 \vec{\zeta} &= \nabla \times \vec{q} = \begin{vmatrix} \vec{i} & \vec{j} & \vec{k} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ u & v & w \end{vmatrix} \\
 &= \vec{i} \left(\frac{\partial w}{\partial y} - \frac{\partial v}{\partial z} \right) + \vec{j} \left(\frac{\partial u}{\partial z} - \frac{\partial w}{\partial x} \right) + \vec{k} \left(\frac{\partial v}{\partial x} - \frac{\partial u}{\partial y} \right) \quad (1.2.15)
 \end{aligned}$$

Hence

$$\{\Omega_{ij}\} = \frac{1}{2} \begin{pmatrix} 0 & -\zeta_3 & \zeta_2 \\ \zeta_3 & 0 & -\zeta_1 \\ -\zeta_2 & \zeta_1 & 0 \end{pmatrix} \quad (1.2.16)$$

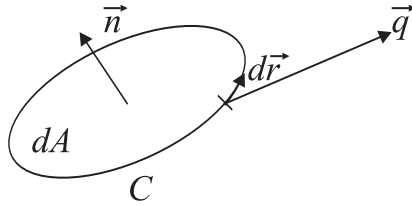


Figure 1.2.2: Circulation along a closed circle

What is the physical meaning of $\vec{\zeta}$? Consider a plane circular disc A bounded by the circle C of radius a , see Figure 1.2.2. By Stokes' theorem

$$\iint_A (\nabla \times \vec{q}) \cdot \vec{n} dA = \oint_C \vec{q} \cdot d\vec{r}$$

Now let $a \rightarrow 0$, then,

$$(\nabla \times \vec{q})_n \iint_A dA = \oint_C \vec{q} \cdot d\vec{r}$$

or,

$$\frac{1}{2} \zeta_n = \frac{1}{2} (\nabla \times \vec{q})_n = \frac{1}{a} \left[\frac{1}{2\pi a} \oint_C \vec{q} \cdot d\vec{r} \right]$$

The quantity

$$\left[\frac{1}{2\pi a} \oint_C \vec{q} \cdot d\vec{r} \right]$$

is the average tangential velocity along the circle. Hence $\zeta_n/2$ is the average angular speed of the fluid circling along C , i.e., the average rate of rotation. The line integral above is also known as the *circulation*.