

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

6.02 Fall 2010

Practice Problems on Channel Coding, MAC Protocols, Filters

I Block Codes

In addition to the problems listed here, please study and solve the problems in the notes for Lecture 6 and the online problem set for Lab 4.

1. The Registrar has asked for an encoding of class year ("Freshman", "Sophomore", "Junior", "Senior") that will allow single error correction. In the table below, please fill in an appropriate 5-bit binary encoding for each of the four years.

Year	Multi-bit binary encoding for year
Freshman	
Sophomore	
Junior	
Senior	

2. Dos Equis Encodings, Inc. specializes in codes that use 20-bit transmit blocks. They are trying to design a $(20, 16)$ linear block code for single error correction. Explain whether they are likely to succeed or not.

3. For any linear block code over $\mathbb{F}_2$ with minimum Hamming distance at least $2t + 1$ between code words, show that:

$$2^{n-k} \geq 1 + \binom{n}{1} + \binom{n}{2} + \dots + \binom{n}{t}.$$

Hint: How many errors can such a code always correct?

4. The following matrix shows a rectangular single error correcting code consisting of 9 data bits, 3 row parity bits and 3 column parity bits. For each of the examples that follow, please indicate the correction the receiver must perform: give the position of the bit that needs correcting (e.g., D7, R1), or “no” if there are no errors, or “M” if there is a multi-bit uncorrectable error.

D1	D2	D3	R1
D4	D5	D6	R2
D7	D8	D9	R3
C1	C2	C3	—

1	1	1	1
1	1	0	0
0	1	1	0
0	1	1	—

0	0	1	0
0	1	1	1
0	1	1	0
0	0	1	—

1	1	0	0
1	0	0	1
0	0	1	0
0	0	1	—

1	0	1	0
1	0	0	1
1	1	0	0
1	1	1	—

1	1	1	0
1	1	1	1
1	0	0	0
0	0	1	—

Error:_____

Error:_____

Error:_____


Error:_____

Error:_____

II Convolutional Codes

Please also study the problems in the online pset for Lab 4.


5. Consider the following state transition diagram for a $K = 3$, $rate = \frac{1}{2}$ convolutional encoder. The message stream is the bit sequence $X = x[0]x[1] \dots x[n]$; the states are labeled with $x[n-1]x[n-2]$ and the transition arcs are labeled at the source end with $x[n]/p_0p_1$. Assume that the output of the encoder is created by concatenating the parity bits generated from processing each message bit in turn, i.e., $p_0[0]p_1[0]p_0[1]p_1[1] \dots p_0[n]p_1[n]$.

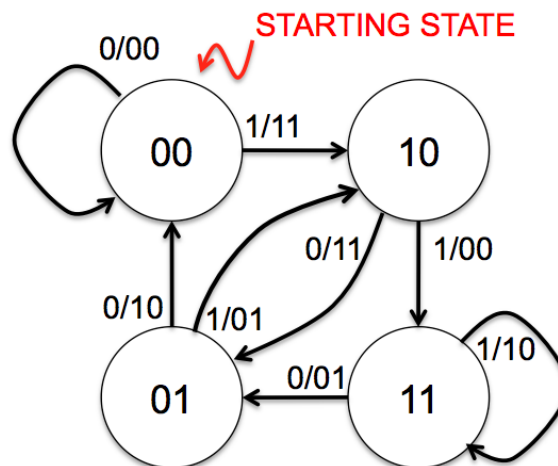

(A) If $X = 01011 \dots$, what is the sequence of bits produced by the convolutional encoder?

sequence produced by encoder: _____

The receiver determines the most-likely transmitted message by using the Viterbi algorithm to process the (possibly corrupted) received parity bits. The path metric trellis generated from a particular set of received parity bits is shown below. The boxes in the trellis contain the minimum path metric as computed by the Viterbi algorithm.

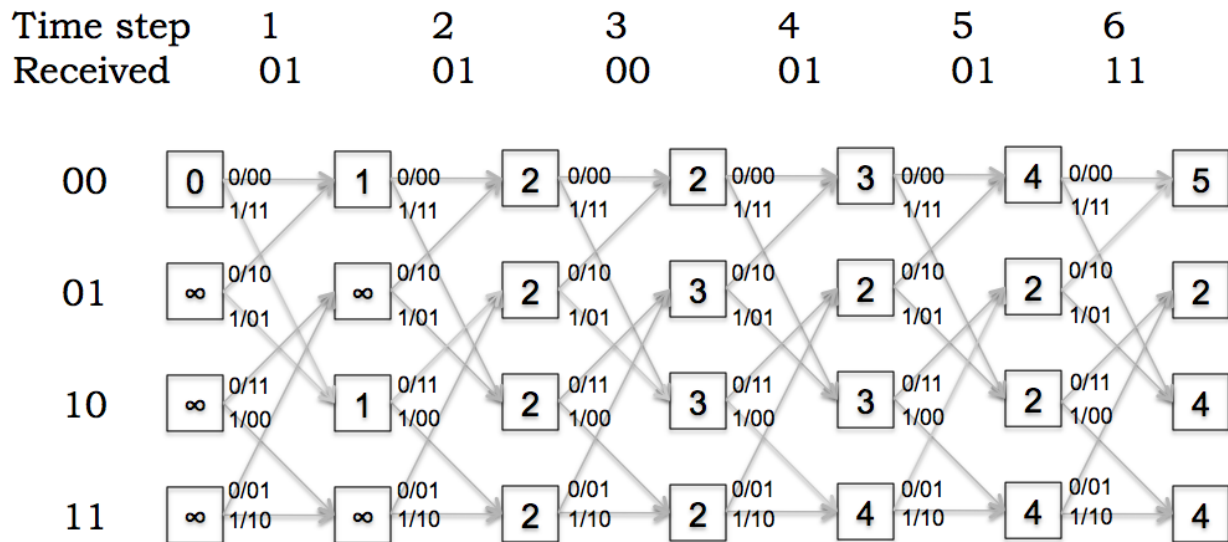

(B) Referring to the trellis above, what is the receiver's estimate of the most-likely transmitter state after processing the bits received at time step 6?

most-likely final state: _____


(C) Referring to the trellis above, show the most-likely path through the trellis by placing a circle around the appropriate state box at each time step and darkening the appropriate arcs. What is the receiver's estimate of the most-likely transmitted message?

most-likely transmitted message: _____

(D) Referring to the trellis above, and given the receiver's estimate of the most-likely transmitted message, at what time step(s) were errors detected by the receiver? Briefly explain your reasoning.

time steps at which errors detected: _____

Now consider the path metric trellis generated from a *different* set of received parity bits.

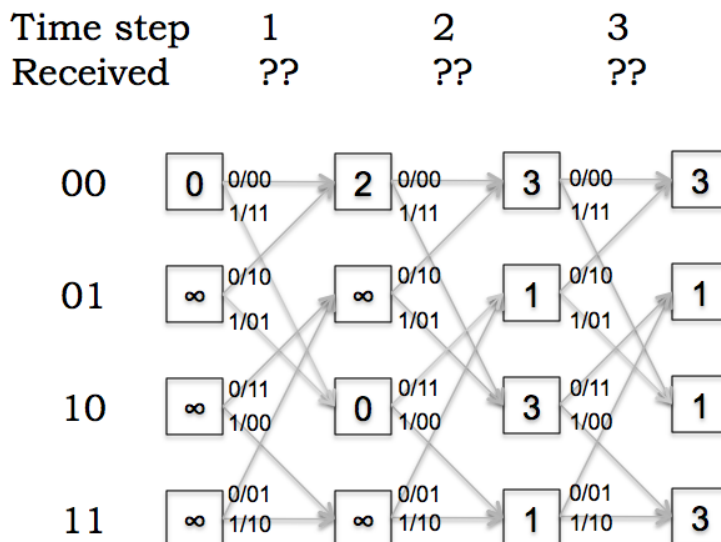

(E) Referring to the trellis above, determine which pair(s) of parity bits *could* have been received at time steps 1, 2 and 3. Briefly explain your reasoning.

Possible pairs of parity bits time 1: _____

Possible pairs of parity bits time 2: _____

Possible pairs of parity bits time 3: _____

6. Consider two convolutional coding schemes, I and II. The generator polynomials for the two schemes are:

Scheme I: $G_0 = 1101$, $G_1 = 1110$

Scheme II: $G_0 = 110101$, $G_1 = 111011$

The notation is follows: if the generator polynomial is, say, 1101, then the corresponding parity bit for message bit n is $x[n] + x[n - 1] + x[n - 3]$. (All arithmetic in $\mathbb{F}_2$.)

A. Indicate True or False for each choice below:

- (a) **True / False** Code rate of Scheme I is 1/4.
- (b) **True / False** Constraint length of Scheme II is 4.
- (c) **True / False** Code rate of Scheme II is equal to code rate of Scheme I.
- (d) **True / False** Constraint length of Scheme I is 4.

B. How many states will there be in the state diagram for Scheme I? For Scheme II?

7. Consider a binary convolutional code specified by the generators (1011, 1101, 1111).

A. Give the values of:

- (a) The constraint length of the code.
- (b) The rate of the code.
- (c) The number of states at each time step of the trellis.
- (d) The number of branches transitioning into each state.
- (e) The number of branches transitioning out of each state.
- (f) The number of expected parity bits on each branch.

A 10000-bit message is encoded with the above code and transmitted over a noisy channel. During Viterbi decoding at the receiver, the state 010 had the lowest path metric (a value of 621) in the final time step, and the survivor path from that state was traced back to recover the original message.

B. What is the most likely number of bit errors that are corrected by the Viterbi decoder?

C. If you are told that the decoded message had no uncorrected errors, can you guess the approximate number of bit errors that would have occurred had the 10000 bit message been transmitted without any coding on the same channel?

D. From knowing the final state of the trellis (010, as given above), can you infer what the last bit of the original message was? What about the last-but-one bit? The last 4 bits?

E. Consider a transition branch between two states on the trellis that has 000 as the expected set of parity bits. Assume that 0V and 1V are used as the signaling voltages to transmit a 0 and 1 respectively, and 0.5V is used as the digitization threshold.

Assuming hard decision decoding, which of the two set of received voltages will be considered more likely to correspond to the expected parity bits on the transition: (0V, 0.501V, 0.501V) or (0V, 0V, 0.9V)? What if one is using soft decision decoding?

8. Indicate whether each of the statements below is true or false, with a brief reason.

A. True / False If the number states in the trellis of a convolutional code is S , then the number of survivor paths at any point of time is S . Remember that if there is a tie between two incoming branches (i.e., they both result in the same path metric), we arbitrarily choose only one as the predecessor.

B. True / False With hard decision decoding, the path metric of a state s_1 in the trellis indicates the number of residual uncorrected errors left along the trellis path from the start state to s_1 .

C. True / False Among the survivor paths left at any point during the decoding, no two can be leaving the same state at any stage of the trellis.

D. True / False Among the survivor paths left at any point during the decoding, no two can be entering the same state at any stage of the trellis. Remember that if there is tie between to incoming branches (i.e., they both result in the same path metric), we arbitrarily choose only one as the predecessor.

E. True / False For a given state machine of a convolutional code, a particular input message bit stream always produces the same output parity bits.

III MAC Protocols

In addition to the problems listed here, please study the problems at the end of the Lecture 10 notes, the problems and examples in the recitation notes by Professors Megretski and Verghese, and the online problem set for Lab 5.

9. Which of these statements are true for correctly implemented versions of stabilized unslotted Aloha, stabilized slotted Aloha, and Time Division Multiple Access (TDMA)? Assume that the slotted and unslotted versions of Aloha use the same stabilization method and parameters.

- A. True / False** When the number of backlogged nodes is large, unslotted Aloha has a lower maximum throughput than slotted Aloha.
- B. True / False** When the number of backlogged nodes is large, there exists some offered load for which the throughput of unslotted Aloha is higher than the throughput of slotted Aloha.
- C. True / False** TDMA has no packet collisions.
- D. True / False** There exists some offered load pattern for which TDMA has lower throughput than slotted Aloha.

10. Binary exponential backoff is a mechanism used in some MAC protocols. Which of the following statements is correct?

- A. True / False** It ensures that two nodes that experience a collision in a time slot will never collide with each other when they each retry that packet.
- B. True / False** It ensures that two or more nodes that experience a collision in a time slot will experience a lower probability of colliding with each other when they each retry that packet.
- C. True / False** It can be used with slotted Aloha but not with carrier sense multiple access.
- D. True / False** Over short time scales, it improves the fairness of the throughput achieved by different nodes compared to not using the mechanism.

11. Consider a shared medium with N backlogged nodes running the slotted Aloha MAC protocol without any backoffs. A “wasted slot” is one in which no node sends data. The fraction of time during which no node uses the medium is the “waste” of the protocol.

- A.** If the sending probability is p , what is the waste? What are the smallest and largest possible values of the waste?
- B.** If the Aloha sending probability, p , for each node is picked so as to maximize the utilization, what is the corresponding waste when N is large?

12. Assume that the shared medium has N backlogged nodes. Which of these statements is true?

- A. **True / False** In a slotted Aloha MAC protocol using binary exponential backoff for stabilization, the probability of transmission will always eventually converge to some value p , and all nodes will eventually transmit with probability p .
- B. **True / False** Using carrier sense multiple access (CSMA), suppose that a node “hears” that the channel is busy at time slot t . To maximize utilization, the node must not transmit in slot t and instead must transmit the packet in the next time slot with probability 1.
- C. **True / False** There is some workload for which an unslotted Aloha with perfect CSMA will not achieve 100% utilization.

13. There are shared medium networks inside computers too! Eight Cell Processor cores are connected together with a shared bus. To simplify bus arbitration, Ben Bittdiddle, a young IBM engineer, suggested time division multiple access (TDMA) as an arbitration mechanism. Using TDMA, each of the processors is allocated a equal-sized time slots on the common bus in a round-robin fashion. Ben has been asked to evaluate the proposed scheme on two types of applications: 1) core-to-core streaming, 2) random loads.

Core-to-core streaming setup: Assume each core has the same stream bandwidth requirement.

Random loads setup: core 1 load = 20%, core 2 load = 30%, core 3 load = 10%, core 4 = 5%, core 5 = 1%, core 6 = 3%, core 7 = 1%, core 8 load = 30%.

Help Ben out by evaluating the effectiveness (bus utilization) of TDMA under these two traffic scenarios.


14. Token-passing is a variant of a TDMA MAC protocol. Here, the N nodes sharing the medium are numbered $0, 1, \dots, N - 1$. The token starts at node 0. A node can send a packet if, and only if, it has the token. When node i with the token has a packet to send, it sends the packet and then passes the token to node $(i + 1) \bmod N$. If node i with the token does not have a packet to send, it passes the token to node $(i + 1) \bmod N$. To pass the token, a node broadcasts a token packet on the medium and all other nodes hear it correctly.


A data packet occupies the medium for time T_d . A token packet occupies the medium for time T_k . If s of the N nodes in the network have data to send when they get the token, what is the utilization of the medium? Note that the bandwidth used to send tokens is pure overhead; the throughput we want corresponds to the rate at which data packets are sent.

IV Filters


In addition to the problems listed below, please solve the problems at <http://web.mit.edu/6.02/www/f2010/handouts/q2review/html/filter-review.html> and in the Lab 6 online problem set.

15. Consider an LTI system characterized by the unit-sample response $h[n]$.
- A. Give an expression for the frequency response of the system $H(e^{j\Omega})$ in terms of $h[n]$.
 - B. If $h[0] = 1$, $h[1] = 0$, $h[2] = 1$, and $h[n] = 0$ for all other n , what is $H(e^{j\Omega})$?
 - C. Let $h[n]$ be defined as in part B right above and $x[n] = \cos(\Omega_1 n)$. Is there a value of Ω_1 such that $y[n] = 0$ for all n and $0 \leq \Omega_1 \leq \pi$?
 - D. Find the maximum magnitude of $y[n]$ if $x[n] = \cos(\pi n/4)$.
 - E. Find the maximum magnitude of $y[n]$ if $x[n] = \cos(-\pi n/2)$.
16. In answering the several parts of this question, consider three linear time-invariant filters, denoted A, B, and C, each characterized by the magnitude of their frequency responses, $|H_A(e^{j\Omega})|$, $|H_B(e^{j\Omega})|$, and $|H_C(e^{j\Omega})|$, respectively, as given in the plots below.

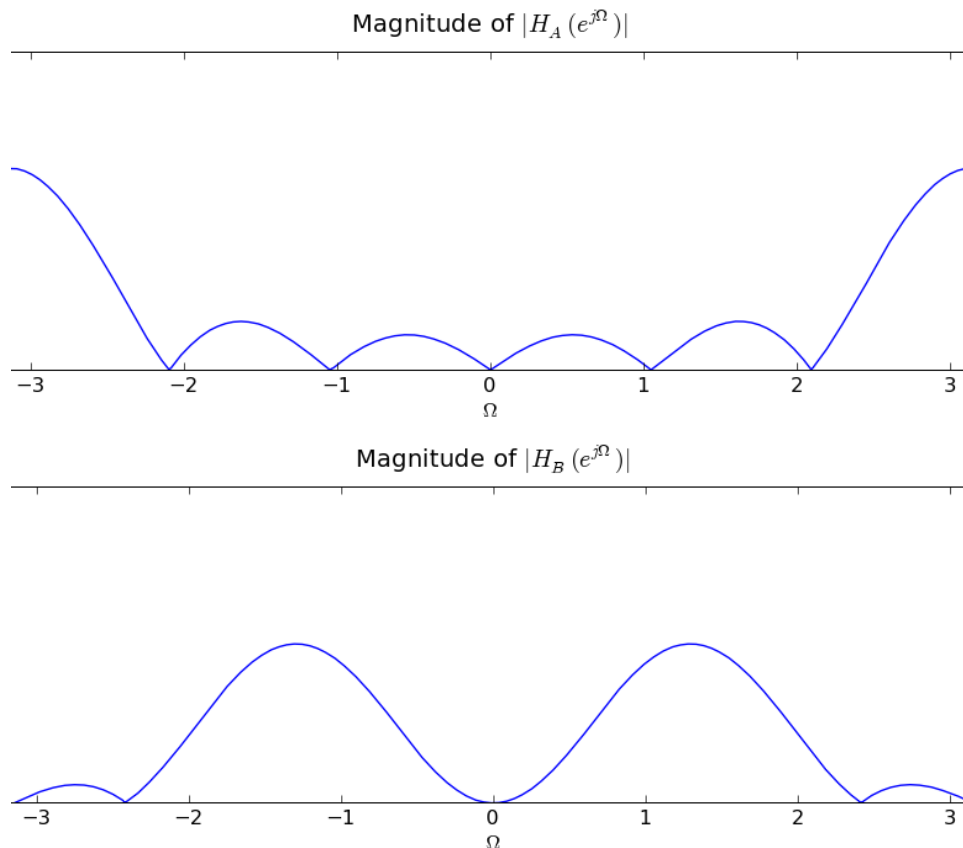

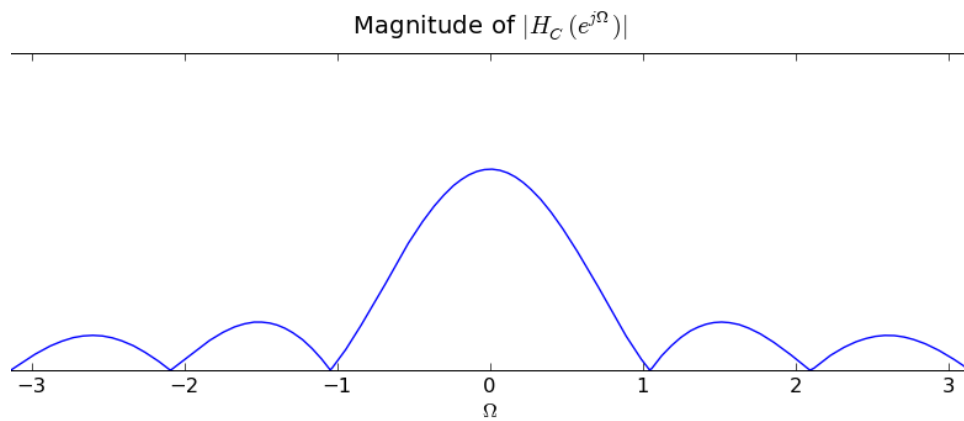


- (A) Which frequency response (A, B, or C) corresponds to the following unit sample response, and what is $\max_{\Omega} |H(e^{j\Omega})|$ for your selected filter? Please justify your selection.

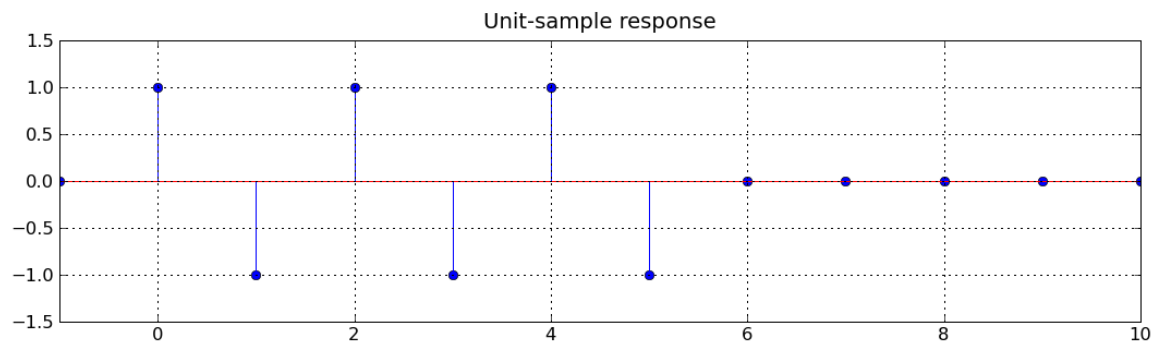

Frequency response plot (A, B, or C) (Be sure to justify your answer) = _____

$\max_{\Omega} |H(e^{j\Omega})| =$ _____

(B) Which frequency response (A, B, or C) corresponds to the following unit sample response, and is the $\max_{\Omega} |H(e^{j\Omega})| > 6$ for your selected filter? Please justify your answers.

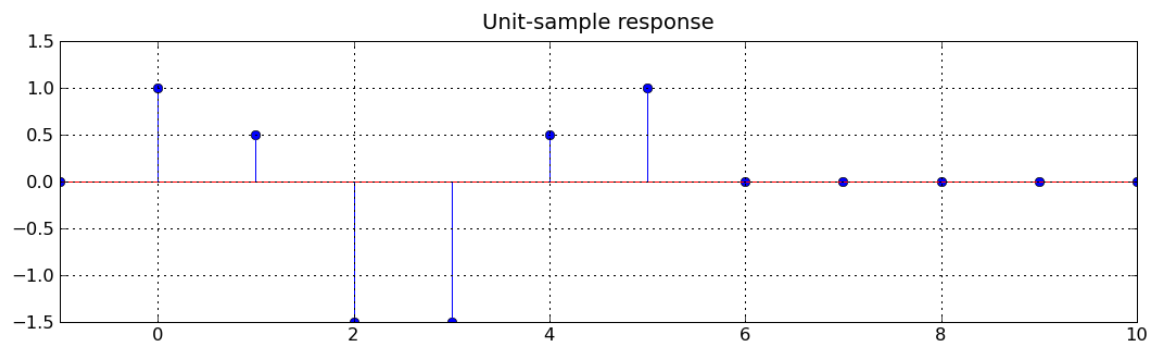

Frequency response plot (A, B, or C) (Be sure to justify your answer) = _____


Is $\max_{\Omega} |H(e^{j\Omega})| > 6$ (yes or no)? _____

You must provide some justification to receive credit.

(C) Suppose the input to each of the above three filters is $x[n] = 0$ for $n < 0$ and for $n \geq 0$ is

$$x[n] = \cos \frac{\pi}{3.0}n + \cos \pi n + 1.0.$$

Which filter (A, B, or C) produced the output, $y[n]$ below, and what is $\max_{\Omega} |H(e^{j\Omega})|$ for your selected system?

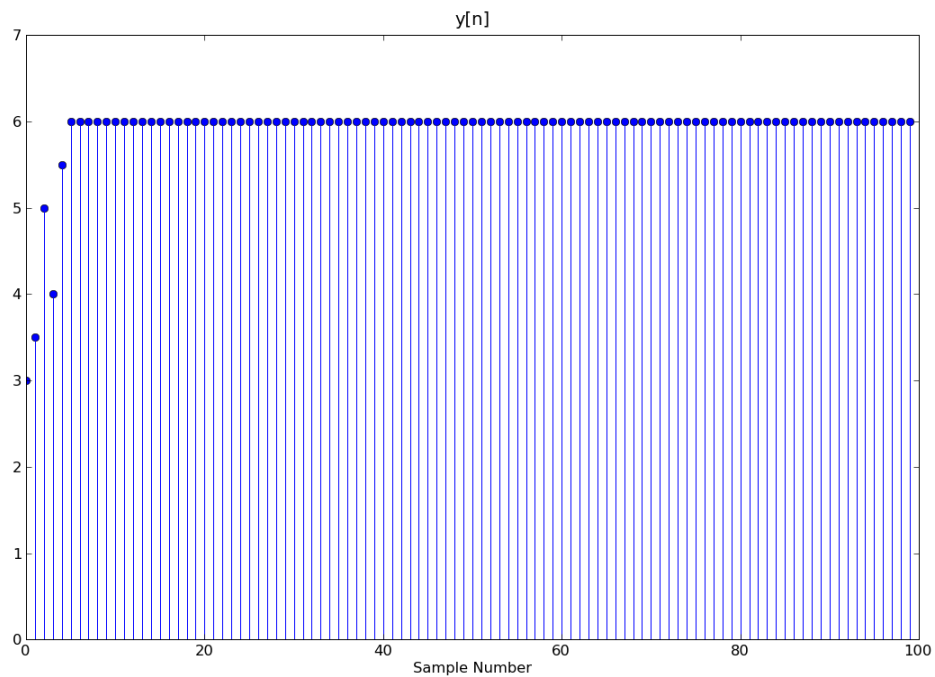

Frequency response plot (A, B, or C) (Be sure to justify your answer) = _____


$\max_{\Omega} |H(e^{j\Omega})| = \text{_____}$

(D) Suppose the input to each of the above three filters is $x[n] = 0$ for $n < 0$ and for $n \geq 0$ is

$$x[n] = \cos \frac{\pi}{3.0}n + \cos \pi n + 1.0.$$

(same input as part C).

Which filter, (A, B, or C), produced the output, $y[n]$ below, and is $\max_{\Omega} |H(e^{j\Omega})| < 4.0$ for your selected filter?

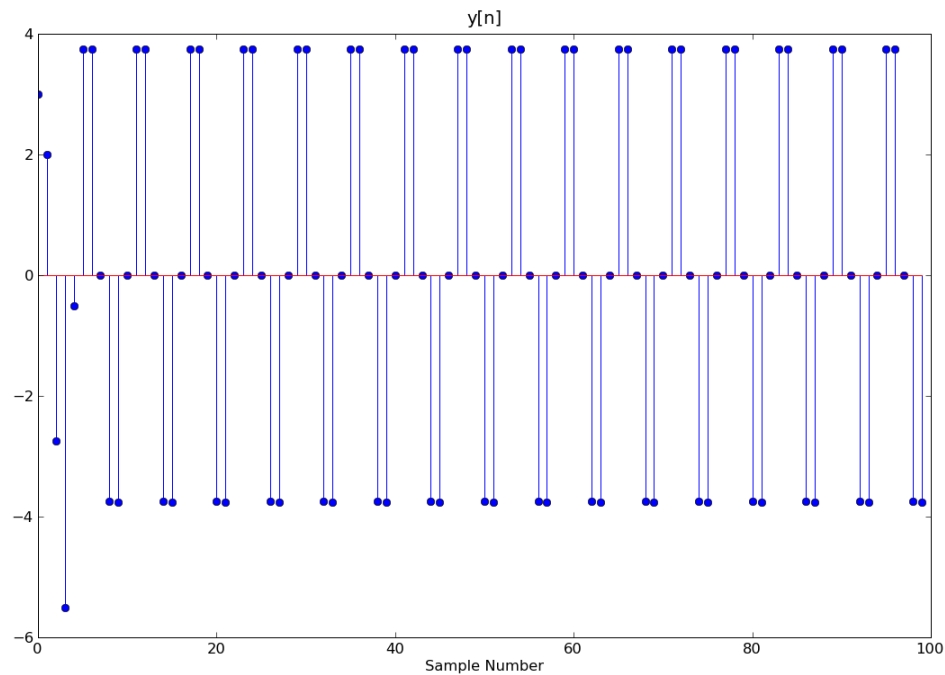

Frequency response plot (A, B, or C) (Be sure to justify your answer) = _____

Is $\max_{\Omega} |H(e^{j\Omega})| < 4$ (yes or no)? _____

You must provide some justification to receive credit.

- (E) Six new filters were generated using the unit sample responses of filters A, B and C, denoted $h_A[n]$, $h_B[n]$, and $h_C[n]$ respectively. The unit sample responses of the new filters were generated in the following way:

$$h_1[n] = h_A[n] + h_B[n]$$

$$h_2[n] = h_A[n] + h_C[n]$$


$$h_3[n] = h_B[n] + h_C[n]$$

$$h_4[n] = \sum_{m=0}^{m=n} h_A[m]h_B[n-m].$$

$$h_5[n] = \sum_{m=0}^{m=n} h_A[m]h_C[n-m].$$


$$h_6[n] = \sum_{m=0}^{m=n} h_B[m]h_C[n-m].$$

Which of the six new filters has a frequency response as plotted below?

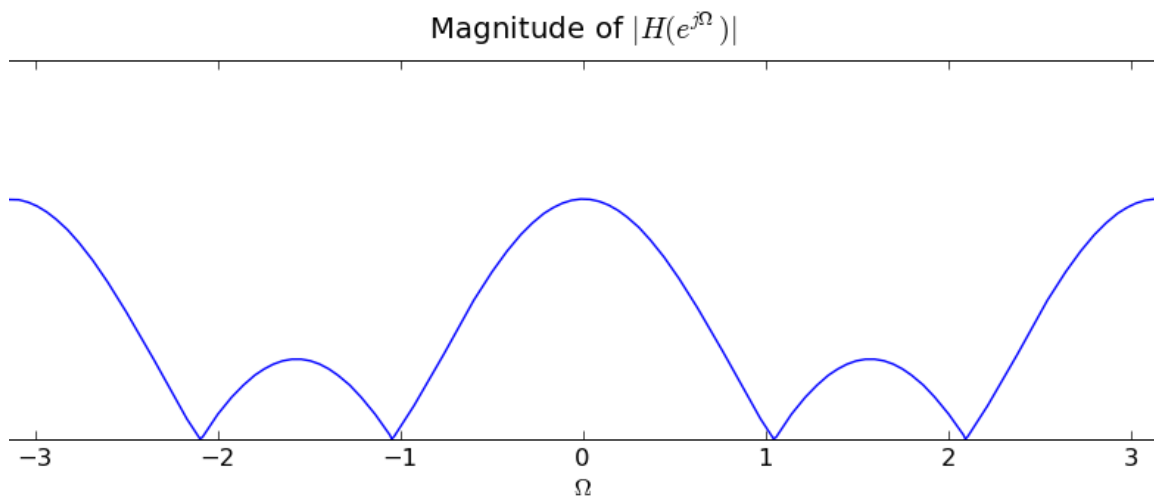

Which filter (1,2,3,4,5 or 6) and you must justify your answer: _____

(F) Which of the six new filters described in part E has a frequency response as plotted below?

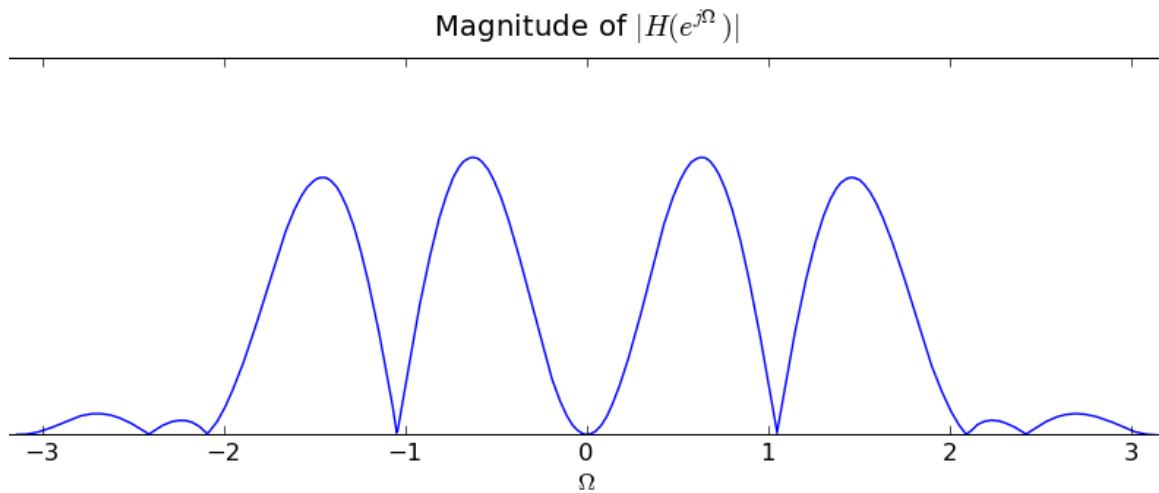

Which filter (1,2,3,4,5 or 6) and you must justify your answer: _____

In answering the questions below, please consider the unit sample response and frequency response of two filters, H_1 and H_2 , plotted below.

Note: the only nonzero values of unit sample response for H_1 are: $h_1[0] = 1, h_1[1] = 0, h_1[2] = 1$.