

MagnetoQuasiStatics Lecture 3

Terry P. Orlando

Dept. of Electrical Engineering

MIT

September 11, 2003



Outline

1. Magnetoquasistatic Equations

2. Magnetic Diffusion Equation

3. Examples

A. Infinite Slab

i. Poorly conducting regime

ii. Perfectly conducting regime


B. Sphere : Magnetic scalar potential

C. Cylinder: Current biased solutions



MagnetoQuasiStatics

$$\left. \begin{aligned} \nabla \times \mathbf{H} &= \mathbf{J} \\ \nabla \cdot \mathbf{B} &= 0 \\ \nabla \cdot \mathbf{J} &= 0 \end{aligned} \right\} \text{Solve first}$$

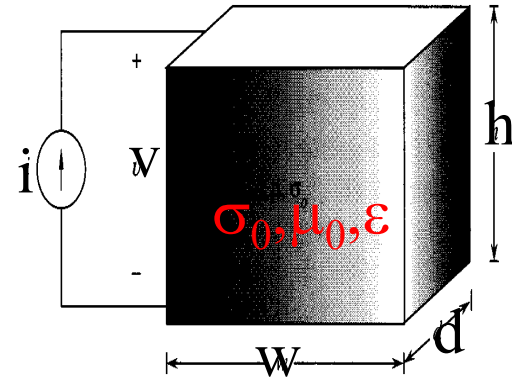

$$\nabla \times \mathbf{E} = - \frac{\partial \mathbf{B}}{\partial t} \quad \text{Solve for } \mathbf{E} \text{ once } \mathbf{B} \text{ is found}$$


Boundary conditions:

$$\mathbf{n} \times (\mathbf{H}_2 - \mathbf{H}_1) = \mathbf{K} \quad \mathbf{n} \cdot (\mathbf{B}_2 - \mathbf{B}_1) = 0 \quad \mathbf{n} \cdot (\mathbf{J}_2 - \mathbf{J}_1) = 0$$



MQS: Magnetic Diffusion Equation

For a metal $\mathbf{B} = \mu_0 \mathbf{H}$, $\mathbf{D} = \epsilon_0 \mathbf{E}$ and $\mathbf{J} = \sigma_0 \mathbf{E}$, so that

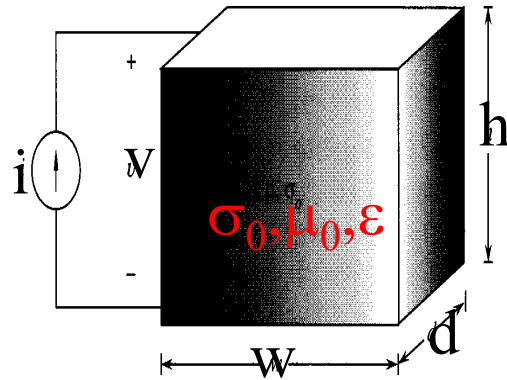


$$\left(\mu \sigma_0 \frac{\partial}{\partial t} - \nabla^2 \right) \mathbf{H} = 0$$

Magnetic Diffusion Equation



Infinite Slab

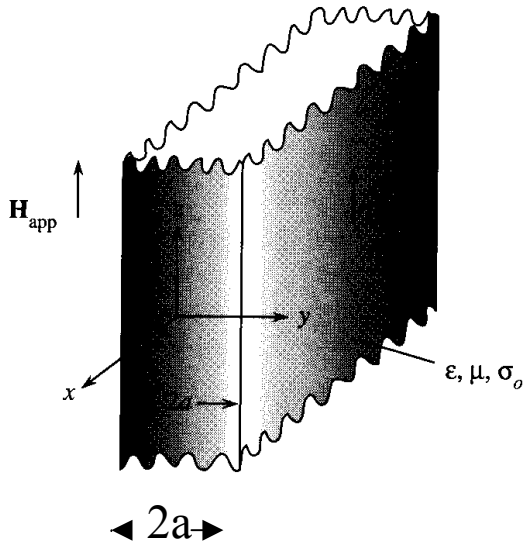

$$\text{Let } \mathbf{H}(\mathbf{r}, t) = \text{Re} \left\{ \hat{H}(y) e^{j\omega t} \right\} \mathbf{i}_z$$

Therefore,

$$\left(j\omega\mu\sigma_o - \frac{d^2}{dy^2} \right) \hat{H}(y) = 0$$

and

$$\hat{H}(y) = C \cosh ky + D \sinh ky$$

so that

$$k^2 = j\omega\mu\sigma_o$$

$$\mathbf{H}_{\text{app}} = \text{Re} \left\{ \hat{H}_o e^{j\omega t} \right\} \mathbf{i}_z$$

$$\left(\mu\sigma_o \frac{\partial}{\partial t} - \nabla^2 \right) \mathbf{H} = 0$$



General Solution

$$k^2 = j\omega\mu\sigma_0 \quad \longrightarrow \quad k = \frac{(1 + j)}{\delta}$$

where the *magnetic diffusion length* is $\delta \equiv \sqrt{\frac{2}{\omega\mu\sigma_0}}$

Boundary Conditions demand $D=0$, so that $\hat{H}(y) = C \cosh ky$

Boundary Conditions demand

$$H_z(a) = H_z(-a) = C \cosh ka = \hat{H}_o$$

Therefore,
$$\mathbf{H} = \text{Re} \left\{ \hat{H}_o \frac{\cosh ky}{\cosh ka} e^{j\omega t} \right\} \mathbf{i}_z$$




Fields and Currents for $|y| < a$

$$\mathbf{H} = \text{Re} \left\{ \hat{H}_o \frac{\cosh ky}{\cosh ka} e^{j\omega t} \right\} \mathbf{i}_z \quad \mathbf{J} = \text{Re} \left\{ \hat{H}_o k \frac{\sinh ky}{\cosh ka} e^{j\omega t} \right\} \mathbf{i}_x$$

Poor conductor limit

Thin film limit


$$a \ll \delta \iff \omega \tau_m \ll 1$$

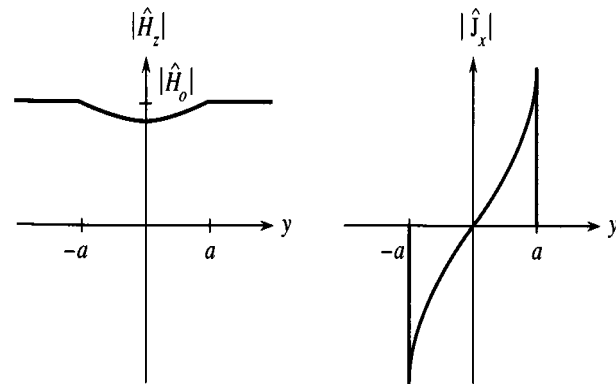

Perfect conductor limit

Bulk limit

$$a \gg \delta \iff \omega \tau_m \gg 1$$

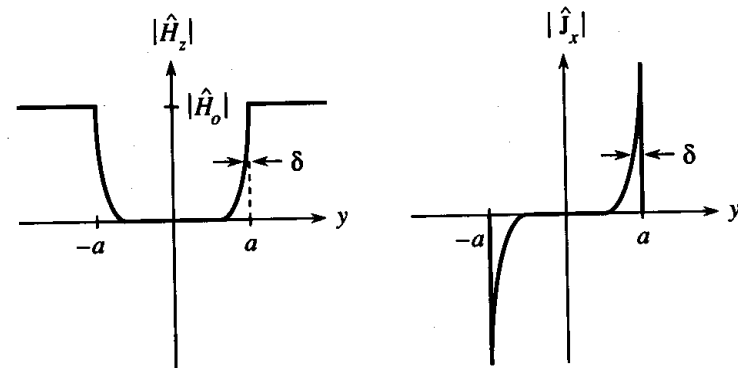

Fields and Currents for $|y| < a$


$$\mathbf{H} = \text{Re} \left\{ \hat{H}_o \frac{\cosh ky}{\cosh ka} e^{j\omega t} \right\} \mathbf{i}_z \quad \mathbf{J} = \text{Re} \left\{ \hat{H}_o k \frac{\sinh ky}{\cosh ka} e^{j\omega t} \right\} \mathbf{i}_x$$

Poor conductor limit

$$\mathbf{H} = \text{Re} \left\{ \hat{H}_o e^{j\omega t} \right\} \mathbf{i}_z \quad \text{and} \quad \mathbf{J} = 0$$

Thin film limit

$$a \ll \delta \iff \omega \tau_m \ll 1$$

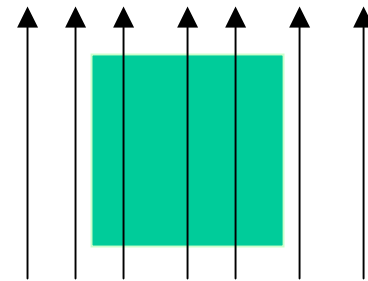


Perfect conductor limit

$$\mathbf{H} = 0 \quad \text{and} \quad \mathbf{K} = \mathbf{J}\delta = \text{Re} \left\{ \hat{H}_o e^{j\omega t} \right\} \mathbf{i}_x$$

Bulk limit


$$a \gg \delta \iff \omega \tau_m \gg 1$$

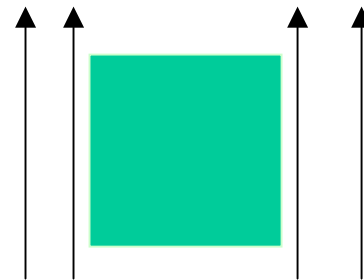

Sphere in a magnetic field

Poorly conducting regime

Perfectly conducting regime

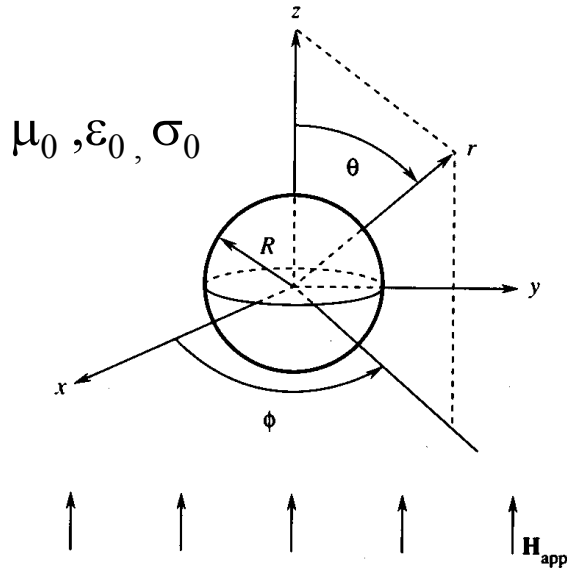


$$\mathbf{H}_{\text{app}} = \text{Re} \left\{ \hat{H}_o e^{j\omega t} \right\} \mathbf{i}_z$$

$$\left(\mu\sigma_o \frac{\partial}{\partial t} - \nabla^2 \right) \mathbf{H} = 0$$

$$\delta \gg R$$

$$\omega\tau_m \ll 1$$

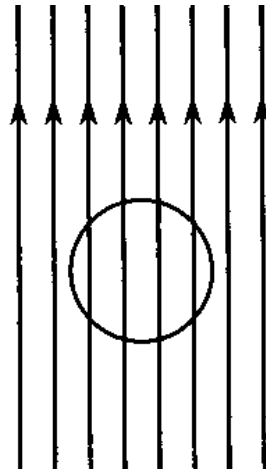


$$\mathbf{H}_{\text{app}} = \text{Re} \left\{ \hat{H}_o e^{j\omega t} \right\} \mathbf{i}_z$$

$$\mathbf{K}(r = R) = 0$$

$$\delta \ll R$$

$$\omega\tau_m \gg 1$$

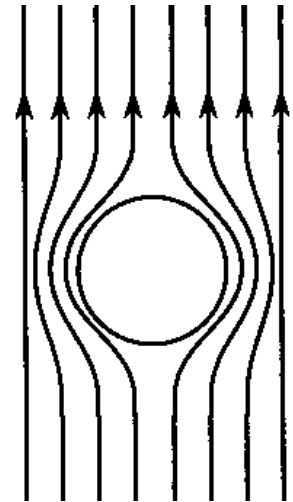


$$\begin{aligned} \mathbf{H}(r \geq R) = & \text{Re} \left\{ \hat{H}_o \left(1 - \left(\frac{R}{r} \right)^3 \right) \cos \theta e^{j\omega t} \right\} \mathbf{i}_r \\ & - \text{Re} \left\{ \hat{H}_o \left(1 + \frac{1}{2} \left(\frac{R}{r} \right)^3 \right) \sin \theta e^{j\omega t} \right\} \mathbf{i}_\theta. \end{aligned}$$

$$\mathbf{K}(r = R) = -\text{Re} \left\{ \frac{3}{2} \hat{H}_o \sin \theta e^{j\omega t} \right\} \mathbf{i}_\phi$$

Sphere in the perfectly conducting regime

$\mu_0, \epsilon_0, \sigma_0$

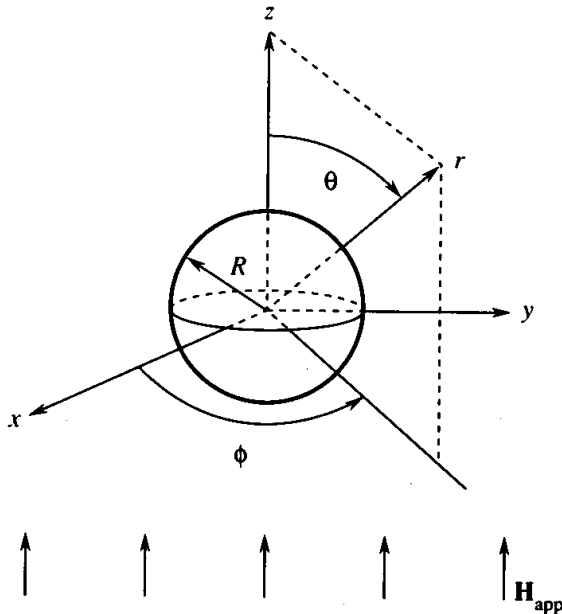

In this bulk approximation, there is no current density $\mathbf{J} = 0$, only a surface current \mathbf{K} . Therefore, in all space

$$\nabla \times \mathbf{H} = 0$$

$$\nabla \cdot \mathbf{H} = 0$$

Define a *magnetic scalar potential*

$$\mathbf{H} \equiv -\nabla \psi$$

which then satisfies Laplace's equation

$$\nabla \cdot \nabla \psi = \nabla^2 \psi = 0$$



Solutions to Laplace's Equation

$$\mathbf{H} \equiv -\nabla\psi$$

Spherical

Cylindrical

Uniform field

$$\psi \propto r \cos \theta = z$$

$$\begin{aligned}\psi &\propto r \cos \theta = x \\ \psi &\propto z\end{aligned}$$

Monopole field

$$\psi \propto \frac{1}{r}$$

$$\psi \propto \ln r$$

Dipole field

$$\psi \propto \frac{\cos \theta}{r^2}$$

$$\psi \propto \frac{\cos \theta}{r}$$



Sphere in a magnetic field

Potential for the uniform field:


$$\psi_o = \text{Re} \left\{ -\hat{H}_o r \cos \theta e^{j\omega t} \right\} \equiv \text{Re} \left\{ \hat{\psi}_o e^{j\omega t} \right\}$$

To have $\mathbf{H} = 0$ for $r < R$, the surface current \mathbf{K} must produce a potential such that

$$\begin{aligned} \hat{\psi}_{in}(r \leq R) &= \hat{\psi}_o(r \leq R) + \hat{\psi}_K(r \leq R) \\ &= -\hat{H}_o r \cos \theta + C_1 r \cos \theta \end{aligned}$$

To match the boundary conditions for all angles, a dipole field is needed on the outside

$$\begin{aligned} \hat{\psi}_{out}(r \geq R) &= \hat{\psi}_o(r \geq R) + \hat{\psi}_K(r \geq R) \\ &= -\hat{H}_o r \cos \theta + C_2 (\cos \theta / r^2) \end{aligned}$$

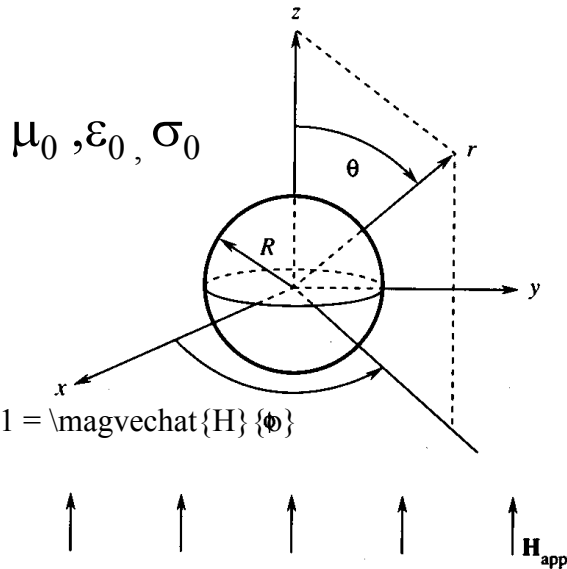


$$\mathbf{H}_{app} = \text{Re} \left\{ \hat{H}_o e^{j\omega t} \right\} \mathbf{i}_z$$

$$\mathbf{H} \equiv -\nabla \psi$$

$$\nabla^2 \psi = 0$$




Inside the Sphere

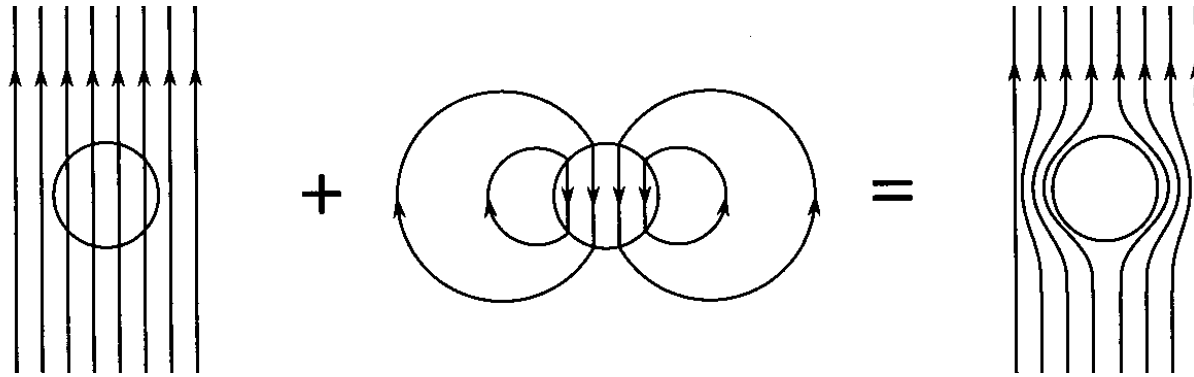

$$\begin{aligned}\hat{\psi}_{\text{in}}(r \leq R) &= \hat{\psi}_o(r \leq R) + \hat{\psi}_K(r \leq R) \\ &= -\hat{H}_o r \cos \theta + C_1 r \cos \theta\end{aligned}$$

Therefore, $C_1 = \hat{H}_o$

Outside the Sphere

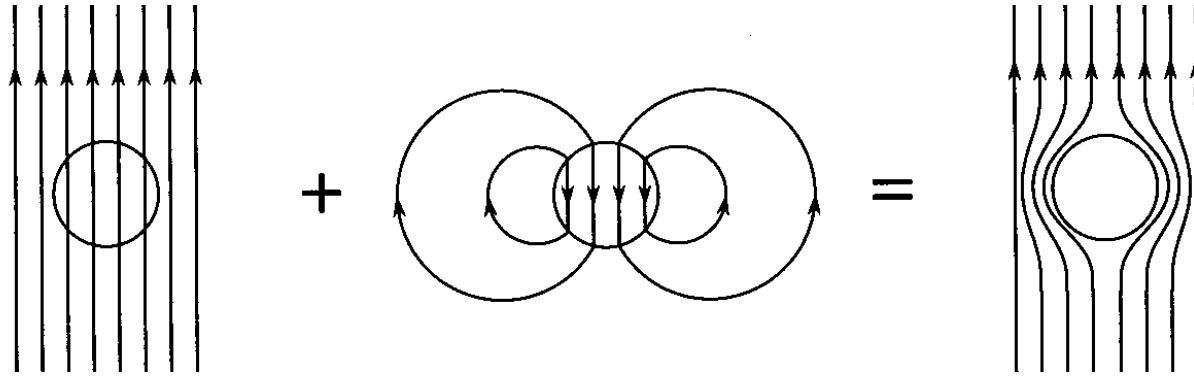

$$\begin{aligned}\hat{\psi}_{\text{out}}(r \geq R) &= \hat{\psi}_o(r \geq R) + \hat{\psi}_K(r \geq R) \\ &= -\hat{H}_o r \cos \theta + C_2(\cos \theta / r^2)\end{aligned}$$


Use the boundary condition

$$\mathbf{i}_r \cdot \left(-\mu_o \nabla \hat{\psi}_{\text{out}} + \mu \nabla \hat{\psi}_{\text{in}} \right) \Big|_{r=R} = 0$$

Therefore, $C_2 = -\frac{1}{2} R^3 \hat{H}_o$



Outside the Sphere

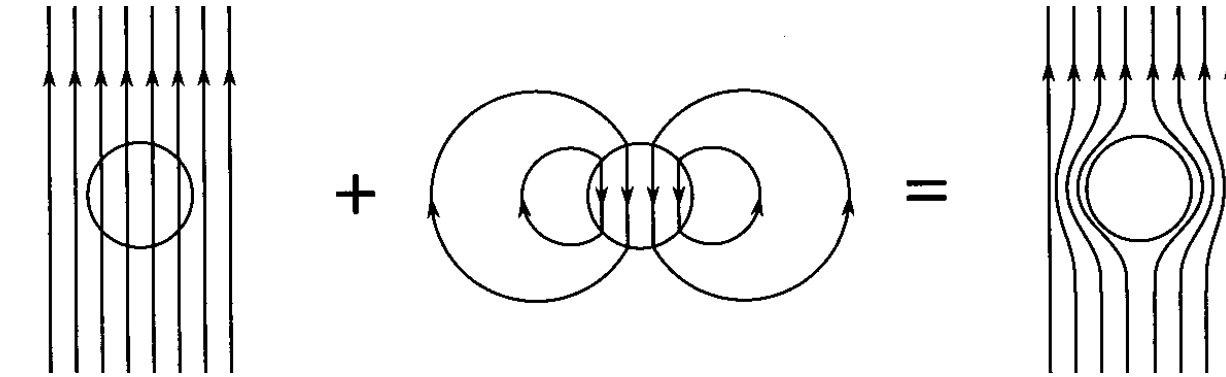

$$\begin{aligned}\hat{\psi}_{\text{out}}(r \geq R) &= \hat{\psi}_o(r \geq R) + \hat{\psi}_K(r \geq R) \\ &= -\hat{H}_o r \cos \theta - \frac{1}{2} R^3 \hat{H}_o (\cos \theta / r^2)\end{aligned}$$

$$\begin{aligned}\mathbf{H}(r \geq R) &= \text{Re} \left\{ \hat{H}_o \left(1 - \left(\frac{R}{r} \right)^3 \right) \cos \theta e^{j\omega t} \right\} \mathbf{i}_r \\ &\quad - \text{Re} \left\{ \hat{H}_o \left(1 + \frac{1}{2} \left(\frac{R}{r} \right)^3 \right) \sin \theta e^{j\omega t} \right\} \mathbf{i}_\theta.\end{aligned}$$

$$\mathbf{K}(r = R) = -\text{Re} \left\{ \frac{3}{2} \hat{H}_o \sin \theta e^{j\omega t} \right\} \mathbf{i}_\phi$$

Current along a cylinder

Poorly conducting regime


Perfectly conducting regime

$$\delta \gg R$$


$$\delta \ll R$$

$$\omega\tau_m \ll 1$$


$$\omega\tau_m \gg 1$$

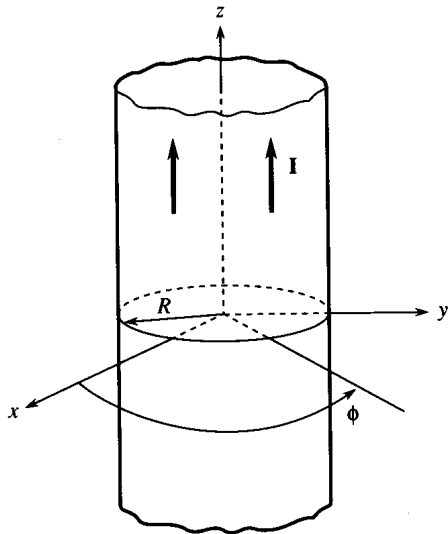

$$\mathbf{I} = \text{Re} \left\{ \hat{I}_0 e^{j\omega t} \right\} \mathbf{i}_z$$

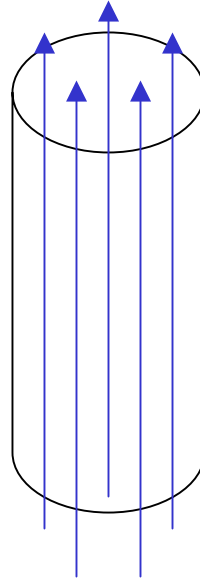

$$\mathbf{J}(r \leq R) = \frac{\mathbf{I}}{\pi R^2}$$

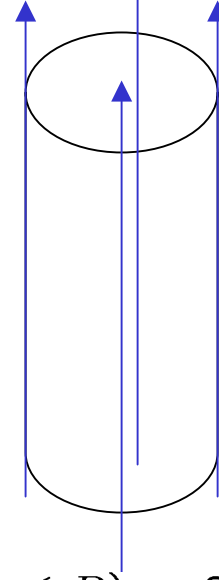


$$\mathbf{J}(r \leq R) = 0$$

$$\mathbf{K}(r = R) = \frac{\mathbf{I}}{2\pi R}$$

Current along a cylinder: poor conductor

The fields from Ampere's law

$$\oint_C \mathbf{H} \cdot d\mathbf{l} = \int_S \mathbf{J} \cdot d\mathbf{s}$$

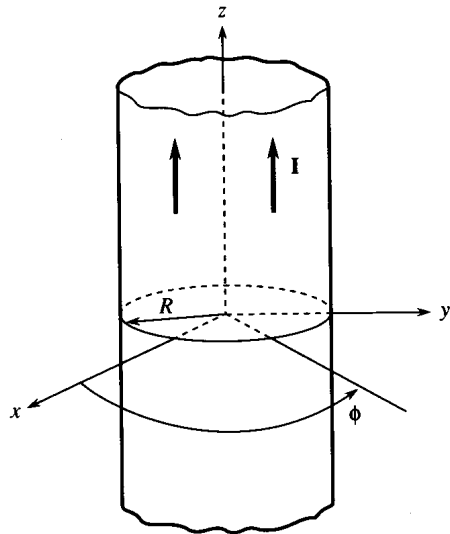

$$\text{Inside: } H 2\pi r = \frac{I}{\pi R^2} \pi r^2$$

$$\mathbf{H}(r \leq R) = \text{Re} \left\{ \frac{\hat{I}_o}{2\pi R} \frac{r}{R} e^{j\omega t} \right\} \mathbf{i}_\phi$$

$$\text{Outside: } H 2\pi r = \frac{I}{\pi R^2} \pi R^2$$

$$\mathbf{H}(r \geq R) = \text{Re} \left\{ \frac{\hat{I}_o}{2\pi r} e^{j\omega t} \right\} \mathbf{i}_\phi$$

$$\mathbf{I} = \text{Re} \left\{ \hat{I}_o e^{j\omega t} \right\} \mathbf{i}_z$$

$$\mathbf{J}(r \leq R) = \frac{\mathbf{I}}{\pi R^2}$$


Therefore, $\mathbf{K}(r = R) = 0$



Current along a cylinder: perfect conductor

The fields from Ampere's law

$$\oint_C \mathbf{H} \cdot d\mathbf{l} = \int_S \mathbf{J} \cdot d\mathbf{s}$$

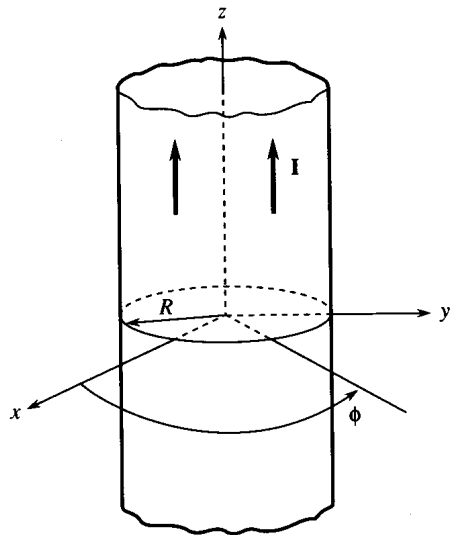

Inside: $H 2\pi r = 0$

$$\mathbf{H}(r \leq R) = 0$$

Outside: $H 2\pi r = I$

$$\mathbf{H}(r \geq R) = \text{Re} \left\{ \frac{\hat{I}_o}{2\pi r} e^{j\omega t} \right\} \mathbf{i}_\phi$$

$$\mathbf{I} = \text{Re} \left\{ \hat{I}_o e^{j\omega t} \right\} \mathbf{i}_z$$

$$\mathbf{J}(r \leq R) = \frac{\mathbf{I}}{\pi R^2}$$

Therefore, $\mathbf{K}(r = R) = \frac{\mathbf{I}}{2\pi R}$

